
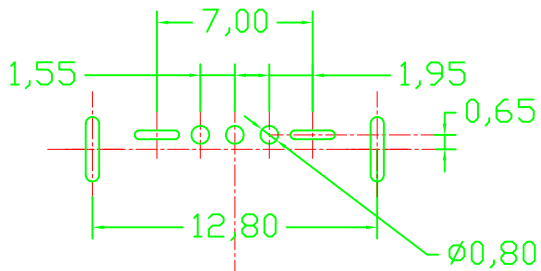
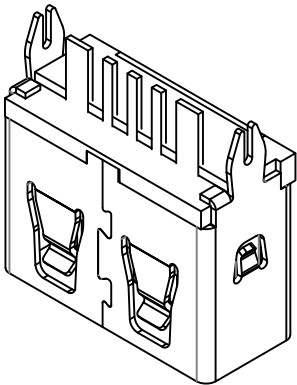


由Autodesk 教育版产品制作




由Autodesk 教育版产品制作

由Autodesk 教育版产品制作

MAPX	MODIFICATION	DATE

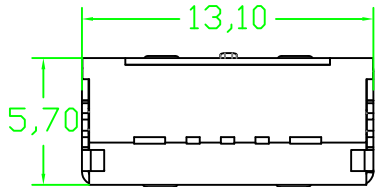


RECOMMAND P. C. B LAYOUT
TOLERANCE: ± 0.10

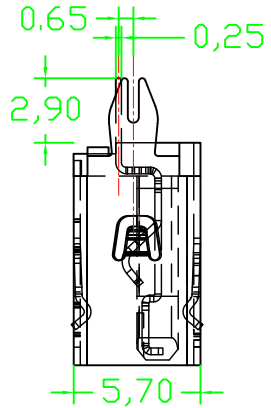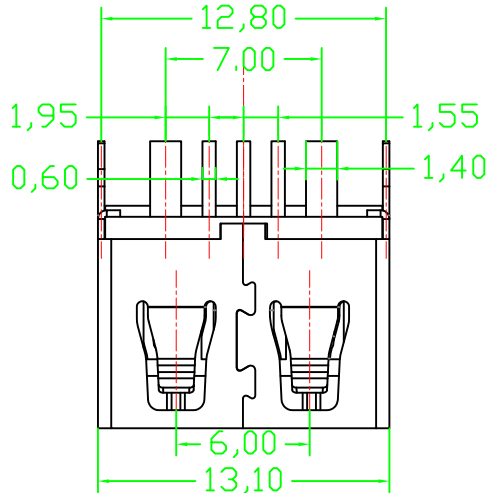

NOTES:

1. MATERIAL SPECIFICATION:
 - 1) INSULATION MATERIAL: THERMOPLASTIC HALGENFREE.
 - 2) SHELL: **SPCC** T: 0.30mm
PLATING: NICKEL
 - 3) TERMINAL: COPPER ALLOY T: 0.25mm
PLATING: GOLD/TIN PLATED;
2. ELECTRICAL CHARACTERISTIC:
 - 1) INSULATION RESISTANCE: 1000M Ω MIN;
 - 2) CONTACT RESISTANCE: 30m Ω MAX;
 - 3) WITHSTANDING VOLTAGE: 500V AC;
3. MECHANICAL CHARACTERISTICS:
 - 1) INSERTION FORCE: 3.57Kgf Max;
 - 2) EXTRACTION FORCE: 1.02Kgf Min;

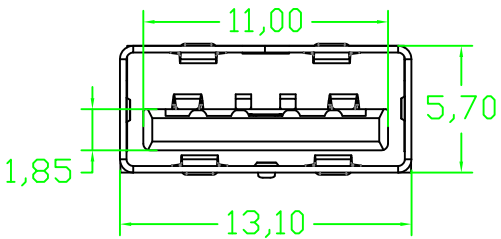

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	
X.	± 0.30	X.	$\pm 5^\circ$	比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NO.	AF 180度插板 5P
.X	± 0.25	.X	$\pm 2^\circ$	日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	
.XX	± 0.15	.XX	$\pm 1^\circ$					版本 VER	A0
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$						