

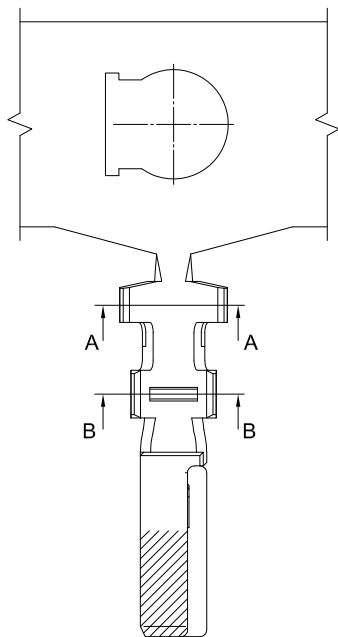

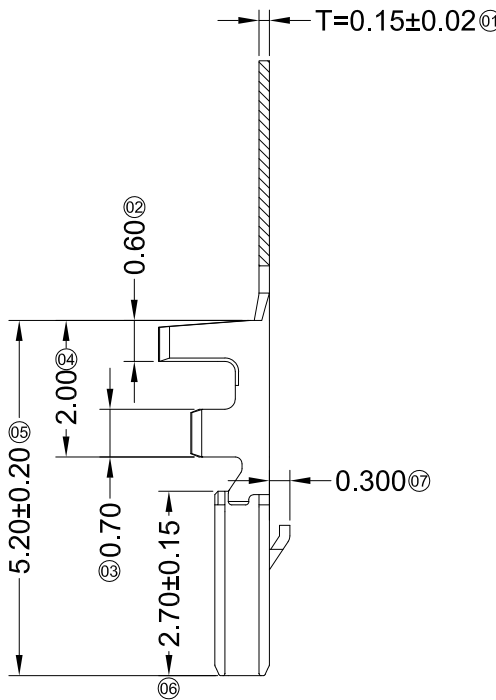


SECTION: A-A
SCALE: 1:1

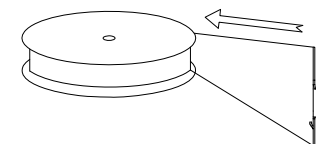

SECTION: B-B
SCALE: 1:1



电镀后收料方向示意图
(压线开口朝外)

- Specifications(规格) :
- Voltage rating(额定电压): 500V AC / DC
 - Current rating(额定电流): 2A AC / DC
 - Withstanding voltage(耐压值): 1500V AC/minute
 - Temperature range(工作温度): -40°C~+85°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤30mΩ
 - After environmental testing(环境测试后): ≤40mΩ

X3700T X-P SN X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ①系列
②类别: T-端子
③外观形态: 空码-普通脚
④材质: P-磷铜
⑤电镀类别: G**-镀金 V**-镀全金
*01-Gold Flash *02-2u" *03-3u" *05-5u"
*10-10u" *15-15u" *30-30u" *50-50u"
SN-镀亮锡(70-120u") SN1-镀亮锡(120u"Min.)
0-素材 SW-镀雾锡
⑥电镀方式: 空码-先冲后镀
⑦模号/MARK及特殊码:

X3700T-PSN	Phosphor Bronze	AWG#26-28	1.07mm(Max)	Stamping Before Plating:30u" Ni;70u"Sn	X3700H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)

DSND		DATE		SCALE: N/A	MODEL TYPE: X3700T-PSN
DWN		DATE		VIEW:	PART NO.: 3700 mm Crimp Style connectors
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0