


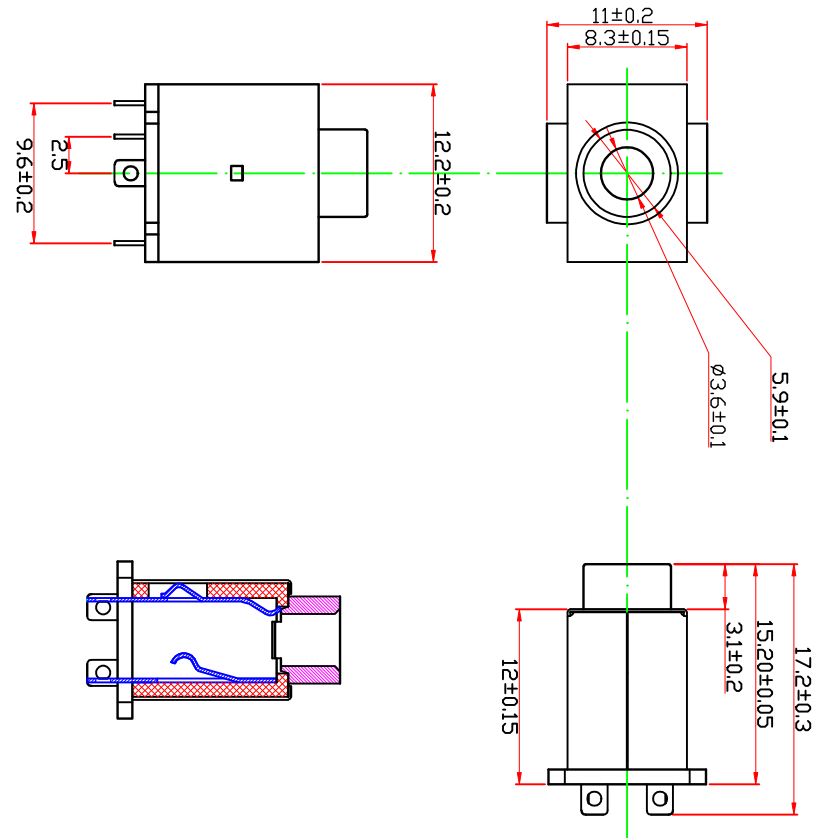

Temperature	-20~70 C
Rated Load	DC 30V 0.3A
Contact Resistance	<0.03Ω
Insulation Resistance	>100MΩ
Withstand Voltage	AC500V(50Hz)/min
Actuating Force	2.2~35N
Life	3000次

PIN	PJ-378-X	
Schematic		G:Green R:Red

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
terminal 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
copper bush	Brass	tin
base	PBT	
cover	PA66	
Shell	SUS	
Plastic	PA66	

					DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
Δx					ANGLAR	±5°	DWN	DATE	VIEW:	PART NO.: PJ-378-X
Δx					X.X	±0.2mm	CHKD	DATE	UNIT: mm	DWG NO.: PJ-378-X
Δx					X.XX	±0.1mm	APPD	DATE	SIZE: A4	
Δx					X.XXX	±0.05mm				
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES					
REVISIONS					XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn										SHEET 1/1
										REVISION A0