


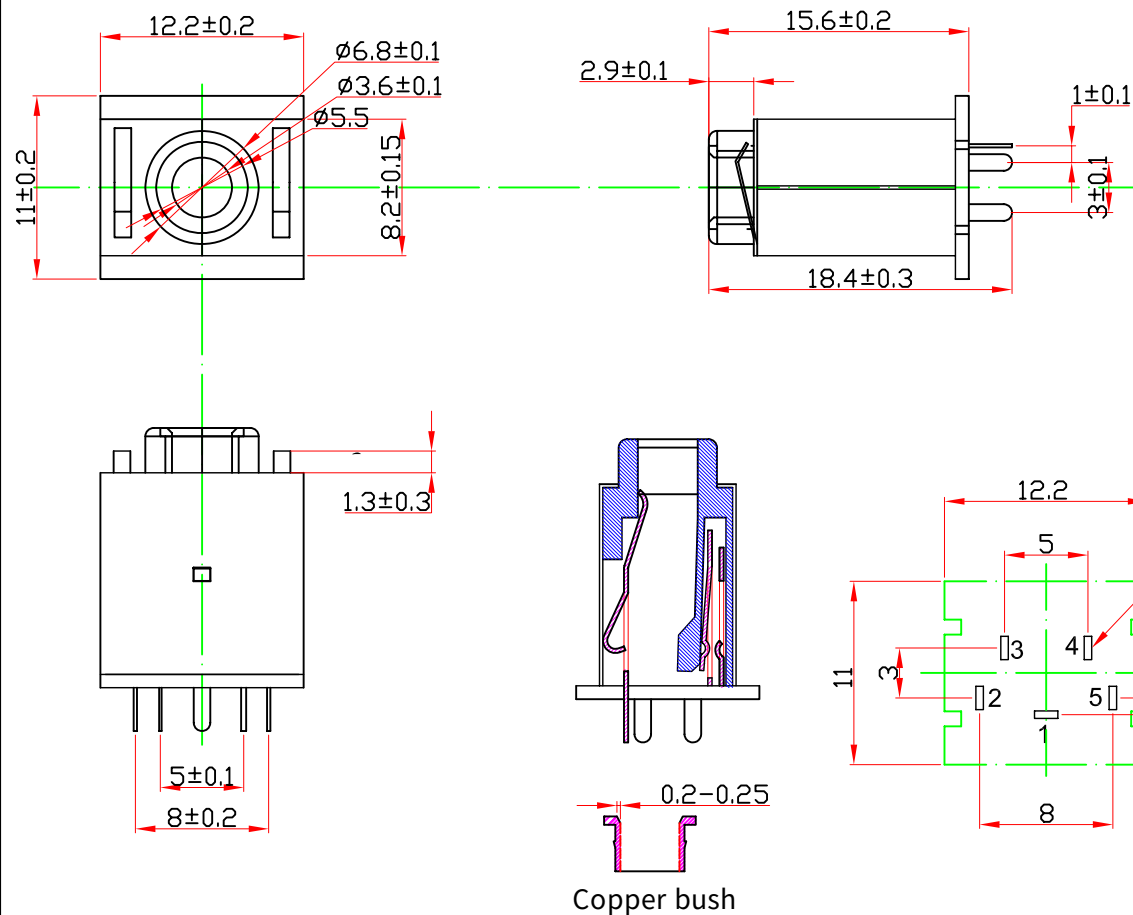

Temperature	-20~70 C
Rated Load	DC 30V 0.3A
Contact Resistance	<0.03Ω
Insulation Resistance	>100MΩ
Withstand Voltage	AC500V(50Hz)/min
Actuating Force	8~30N
Life	3000次

PIN	PJ-379-T-X	
Schematic		G:Green R:Red

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
terminal 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
base	PA66	
Shell	SUS	
Cover	PA66	
Copper bush	Brass	tin

						DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
Δx					ANGULAR	DWN		DATE		VIEW:	PART NO.: PJ-379-T-X
Δx					X.X	CHKD		DATE		UNIT: mm	DWG NO.: PJ-379-T-X
Δx					X.XX	APPD		DATE		SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
REVISIONS											SHEET 1/1
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											REVISION A0