
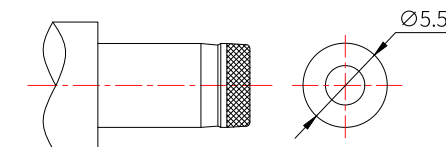

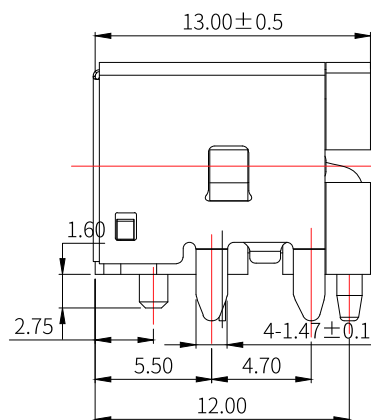





ROHS Compliant

12	13	14	15
MAPX	MODIFICATION	DATE	APPROVE

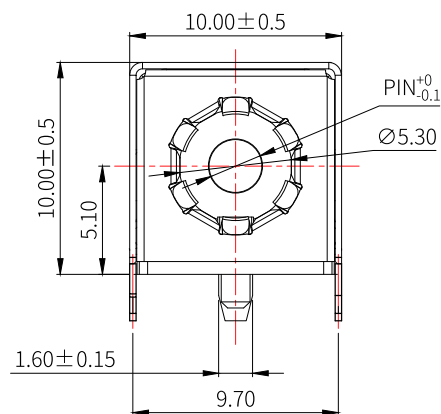

DC MATE PLUG




Pin	Part No	Current
¢ 2.0	DC-091-A200	10A
¢ 2.5	DC-091-A250	10A

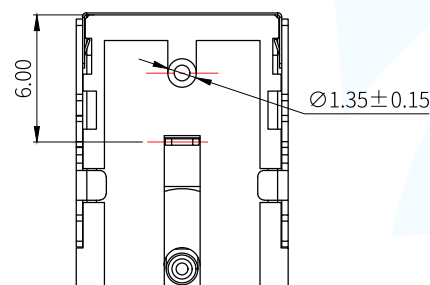

Circuit Diagram

Specification

- 1.RATING : DC 24V 10A
- 2.CONTACT RESISTANCE : ≤0.03
- 3.INSULATION RESISTANCE : ≥100M(DC250V)
- 4.WITHSTAND VOLTAGE : 500VAC
- 5.INSERTION AND EXTRACTION
- 6.FORCE : 3-40N
- 7.LIFE TEST : 5,000 CYCLES

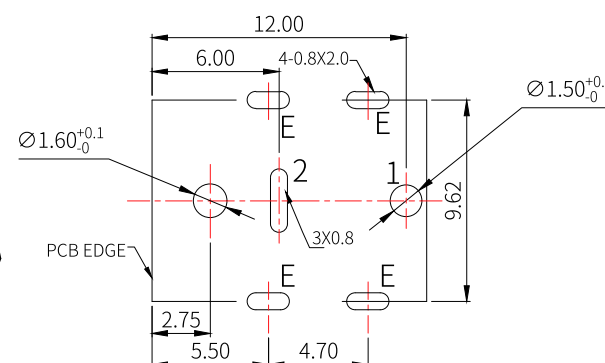

PCB Layout recommended

NO.	NAME	MATERIAL	REMARK
1	CENTER PIN	ZINC ALLOY	NI-PLATING
2	TIP SPRING	C5191 T=0.30	AG-PLATING
3	PEG	SUS201 T=0.40	
4	SHIELD PLATE	SUS301T=0.10	
5	ROUND SHIELD	C5191 T=0.30	NI-PLATING
6	HOUSING	PA10T	UL-94V0(BLACK)
MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE: DC电源插座系列	
X:±0.5	X:±2°	PAR	DC-091-AXXX
X.X:±0.3	X:±0.5	DWN	KING
X.XX:±0.2		CHKD	2012.3.08
		APVD	
		SCALE 1:1	UNIT: mm
		SIZE:A4	SHEET:1F1
		CUSTOMER COPY	REV:A