

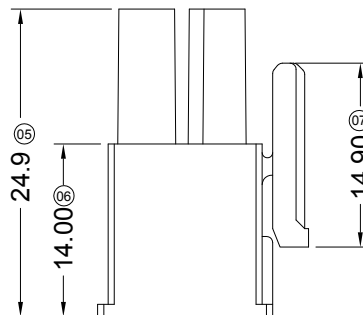
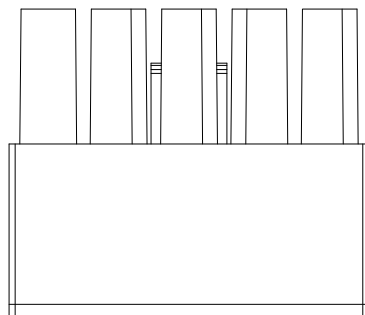

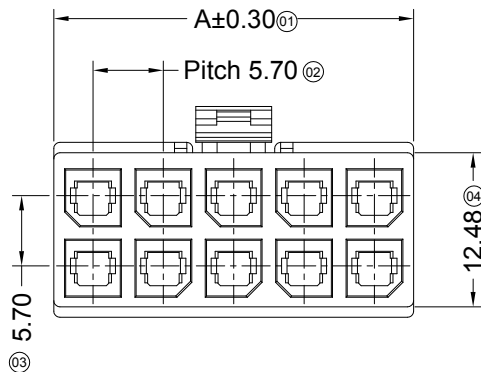



2x01P




2x02P




2x03P



2x04P



2x05P



2x06P

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 23A AC / DC
- Withstanding voltage: 2200V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 2m\Omega$
- After environmental testing: $\leq 10m\Omega$

X5700 H -2*XX-N0

① ② ③ ④

- ① Series No.
② Category: H-HSG
③ Row No.-Pin No.: 2*XX-2*01P~2*06P
④ Material: N0-PA66 94V-0

Poles	Dimensions (mm)
	A
2*01	8.35
2*02	12.05
2*03	17.75
2*04	23.45
2*05	29.15
2*06	34.85

X5700H-2*XX-N0	Nylon 66 UL 94V-0	X5700T	X5700W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK					L > 63	± 0.5
DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	

REVISIONS
Authorized Signature(s)

DSND		DATE		SCALE: N/A	MODEL TYPE: X5700H-2*XX-N0
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	