

■ Specifications :





- Voltage rating: 30V AC / DC
- Current rating: 0.5A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+55°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 30m\Omega$
- After environmental testing: $\leq 20m\Omega$
- Operating Life(Cycles): 5000
- Mating Force: 3-20N

PIN	PJ-313D-B-SMT
Schematic	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	ag
terminal 2	Phosphor Bronze	ag
terminal 3	Phosphor Bronze	ag
plastic	PA	

线路板安装尺寸示意图

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.: PJ-313D-B-SMT
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0

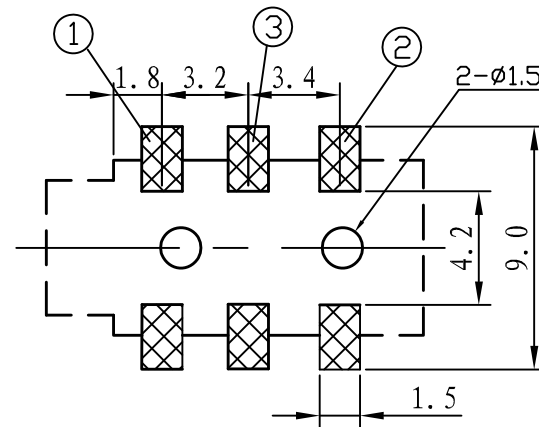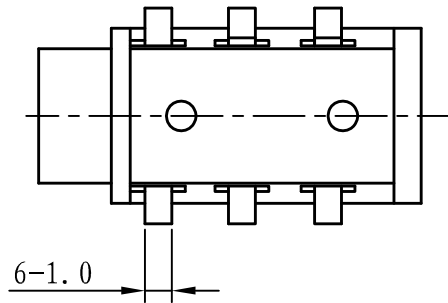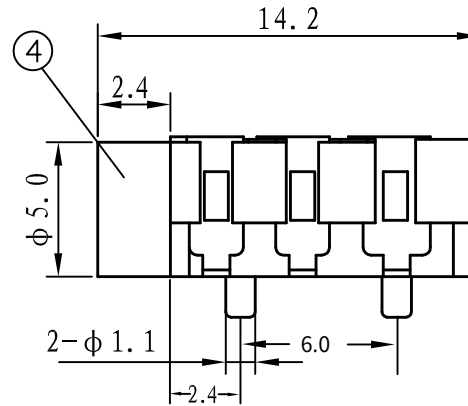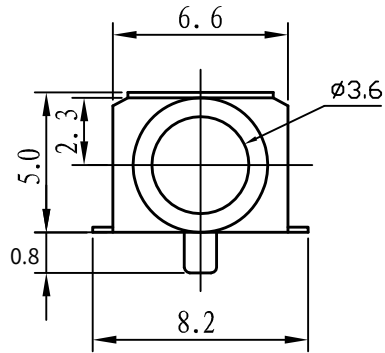

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGULAR X.X ±5°
Δx					X.XX ±0.2mm
Δx					X.XXX ±0.1mm
Δx					X.XXX ±0.05mm