

A

B

C

D

E

F

A

A




B

C





D

E

F

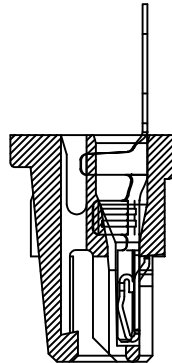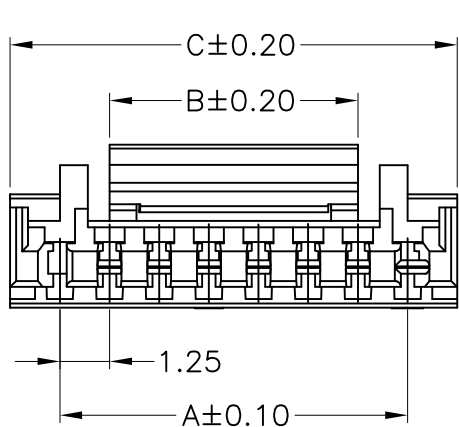

插线状态

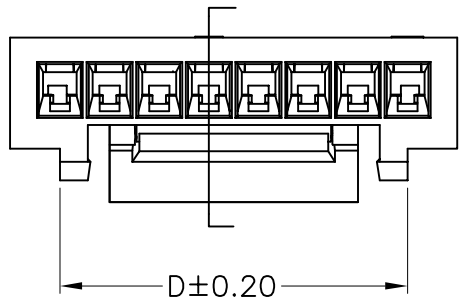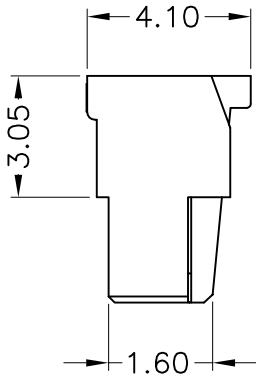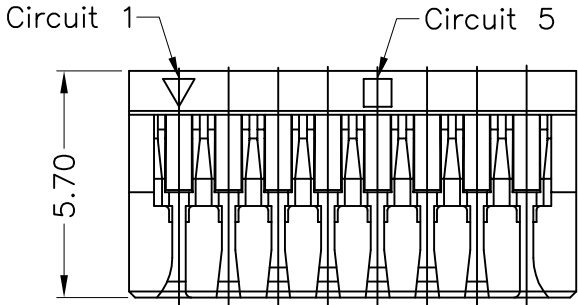

Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤50mΩ

X1251 H X -XX X -N0

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: Blank-ordinary
- ④ Row No.-Pin No.: XX-02P~15P
- ⑤ Plug the Pin & Special No.
- ⑥ Material: N0-PA66 94V-0

Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	1.25	2.20	3.75	
03	2.50	2.90	5.00	
04	3.75	4.20	6.25	
05	5.00	4.20	7.50	
06	6.25	6.25	8.75	
07	7.50	6.25	10.00	
08	8.75	6.25	11.25	8.75
09	10.00	6.25	12.50	10.00
10	11.25	8.20	13.75	11.25
11	12.50	8.20	15.00	12.50
12	13.75	8.20	16.25	13.75
13	15.00	8.20	17.50	15.00
14	16.25	8.20	18.75	16.25
15	17.50	8.20	20.00	17.50

X1251H-XX-N0	PA66 UL 94V-0	X1251T	X1251W
PART N0	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

	AKB INDUSTRIAL PRECISION CO., LIMITED 香港星坤工業精密有限公司						ANGULAR	±5°
△ X							L ≤ 4	±0.2
△ X							4 < L ≤ 16	±0.3
△ X							16 < L ≤ 63	±0.4
MARK		DESCRIPTION	DATE	REVISED	APPROVED		L > 63	±0.5
REVISIONS							UNSPECIFIED TOLERANCES	
Authorized Signature(s)								

DSND		DATE		SCALE: N/A	MODEL TYPE: X1251H-XX-N0HF
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	1.25mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0

1

2

3

4

5

6

7

8