
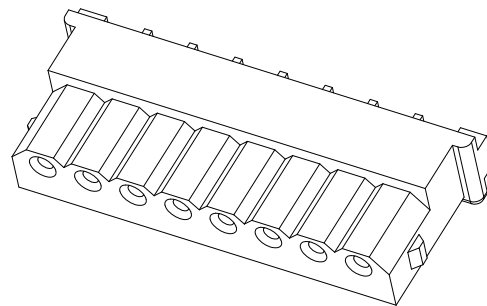


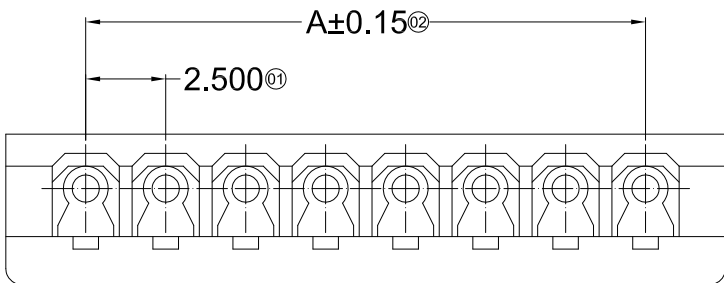




Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

X2564 H X-XX X-N0 XX

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-HSG
③ Appearance type: Blank-Ordinary
④ Row No.-Pin No.: XX-02P~16P
⑤ Plug the Pin & special No.: Blank-Ordinary
⑥ Material: N0-PA66 94V-0
⑦ HF-Halogen Free

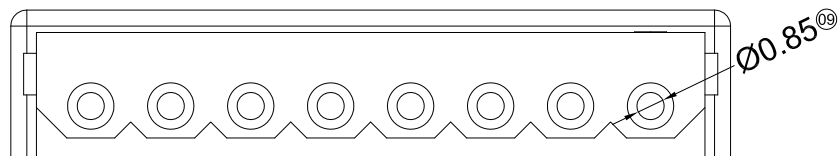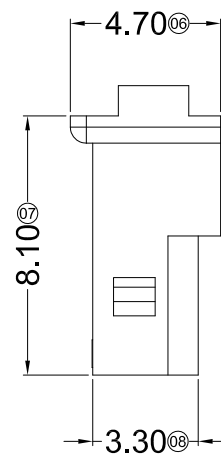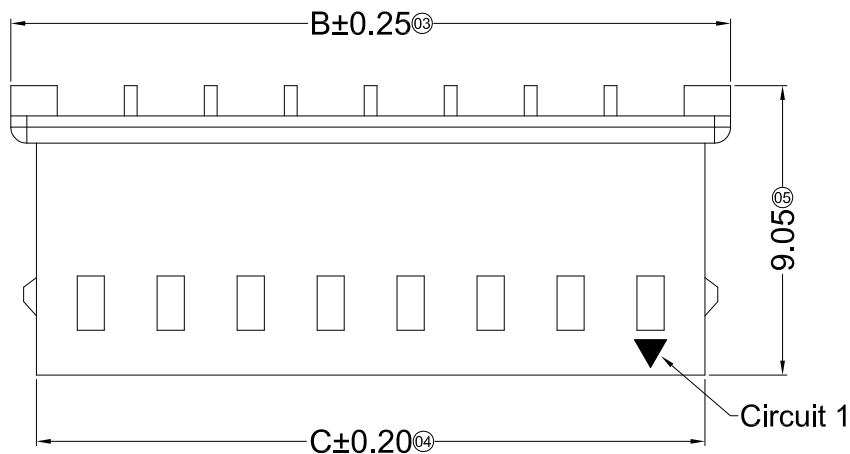

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.50	7.50	5.90	10	22.50	27.50	25.90
03	5.00	10.00	8.40	11	25.00	30.00	28.40
04	7.50	12.50	10.90	12	27.50	32.50	30.90
05	10.00	15.00	13.40	13	30.00	35.00	33.40
06	12.50	17.50	15.90	14	32.50	37.50	35.90
07	15.00	20.00	18.40	15	35.00	40.00	38.40
08	17.50	22.50	20.90	16	37.50	42.50	40.90
09	20.00	25.00	23.40				

X2564H-XX-N0HF	PA66 UL 94V-0 Halogen Free	X2564T	X2564W
X2564H-XX-N0	PA66 UL 94V-0		
PART N0	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
MARK					16 < L ≤ 63	± 0.4
					L > 63	± 0.5
DESCRIPTION				DATE	REVISED	APPROVED
REVISIONS				UNSPECIFIED TOLERANCES		
Authorized Signature(s)						

DSND		DATE		SCALE: N/A	MODEL TYPE: X2564H-XX-N0XX	
DWN		DATE		VIEW:	PART NO.: 2.50mm Crimp Style Connectors	
CHKD		DATE		UNIT: mm	DWG NO.:	
APPD		DATE		SIZE: A4		
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET	REVISION
				1.0g	1/1	A0