

A



B

C


D

E



F

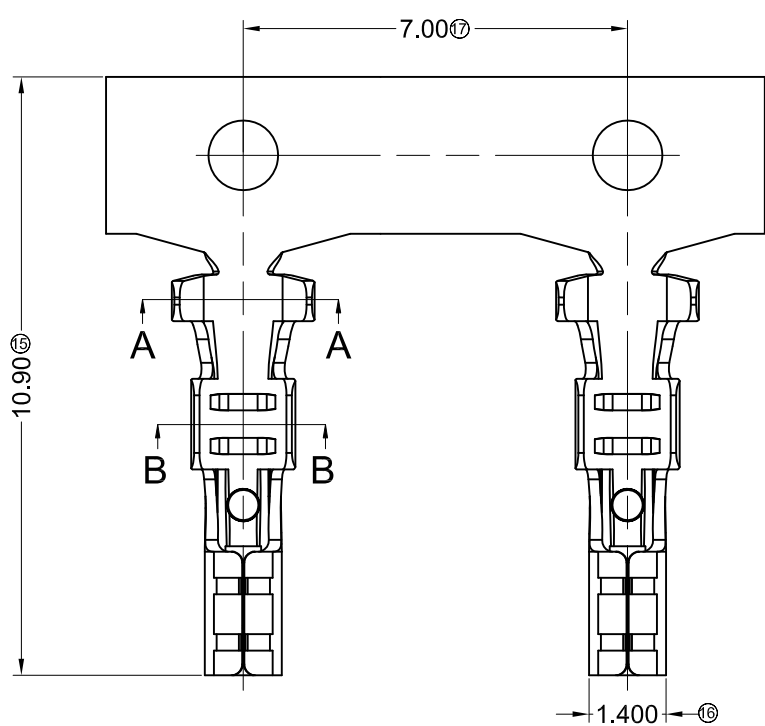

SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1

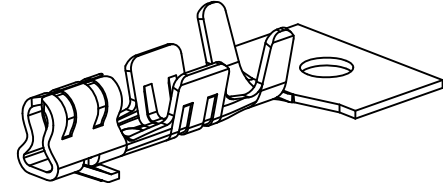

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

X2564 T X-X SN X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: T-Terminal
- ③ Appearance type: Blank-Ordinary
- ④ Material: P-Phosphor bronze ; B-Brass
- ⑤ Plating Style: SN-Bright Tin Plating
- ⑥ Plating Method :
Blank-Stamping before Plating
B-Plating before stamping
- ⑦ Mold No./Mark/Special No.

X2564T-BSNB	Brass	AWG#22-28	1.90mm(Max)	Plating Before Stamping:10u" Ni:40u"Sn	X2564H
X2564T-BSN	Brass			Stamping Before Plating:30u" Ni:70u"Sn	
X2564T-PSN	Phosphor Bronze				
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK					L > 63	± 0.5
DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	

REVISIONS
Authorized Signature(s)

DSND		DATE		SCALE: N/A	MODEL TYPE: X2564T-XSN
DWN		DATE		VIEW:	PART NO.: 2.50mm Crimp Style Connectors
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	