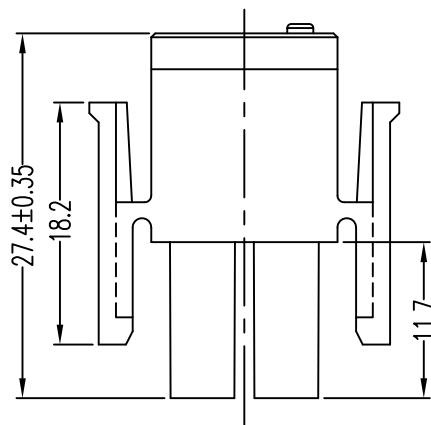

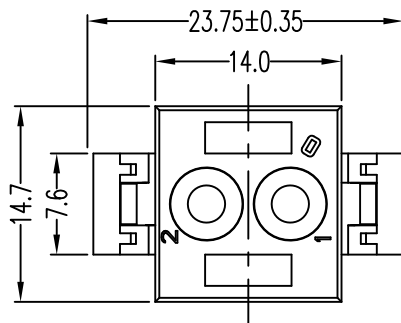


Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 15A AC / DC
- Withstanding voltage: 5000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 3.5\text{m}\Omega$
- After environmental testing: $\leq 10\text{m}\Omega$

X9635 H M-XX N0

① ② ③ ④ ⑤

- ① Series No.
② Category: H-HSG
③ Appearance type: M-Male Housing
④ Row No.-Pin No.: XX-Single Row (02~10P)
⑤ Material : N0-PA66 94V-0

X9635HM-XX-N0	Nylon 66 UL 94V-0	X9635TF	X9635HF
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

	XKB INDUSTRIAL PRECISION CO., LIMITED 香港星坤工業精密有限公司						ANGULAR	±5°
△ X							L ≤ 4	± 0.2
△ X							4 < L ≤ 16	± 0.3
△ X							16 < L ≤ 63	± 0.4
MARK		DESCRIPTION	DATE	REVISED	APPROVED		L > 63	± 0.5
REVISIONS							UNSPECIFIED TOLERANCES	
Authorized Signature(s)								

DSND		DATE		SCALE: N/A	MODEL TYPE: X9635HM-XX-N0		
DWN		DATE		VIEW:	PART NO.:		
CHKD		DATE		UNIT: mm	6.35mm Crimp Style Connectors		
APPD		DATE		SIZE: A4	DWG NO.:		
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT	SHEET	REVISION
					1.0g	1/1	A0