


CUSTOMER DRAWING

版次 REV.	ECN编号 ECN NUMBER	设 变 内 容 MODIFICATION	日 期 DATE	制 图 DRAW	核 准 APPROVE
A		初版发行	21-MAR-19	DOREN	DDS

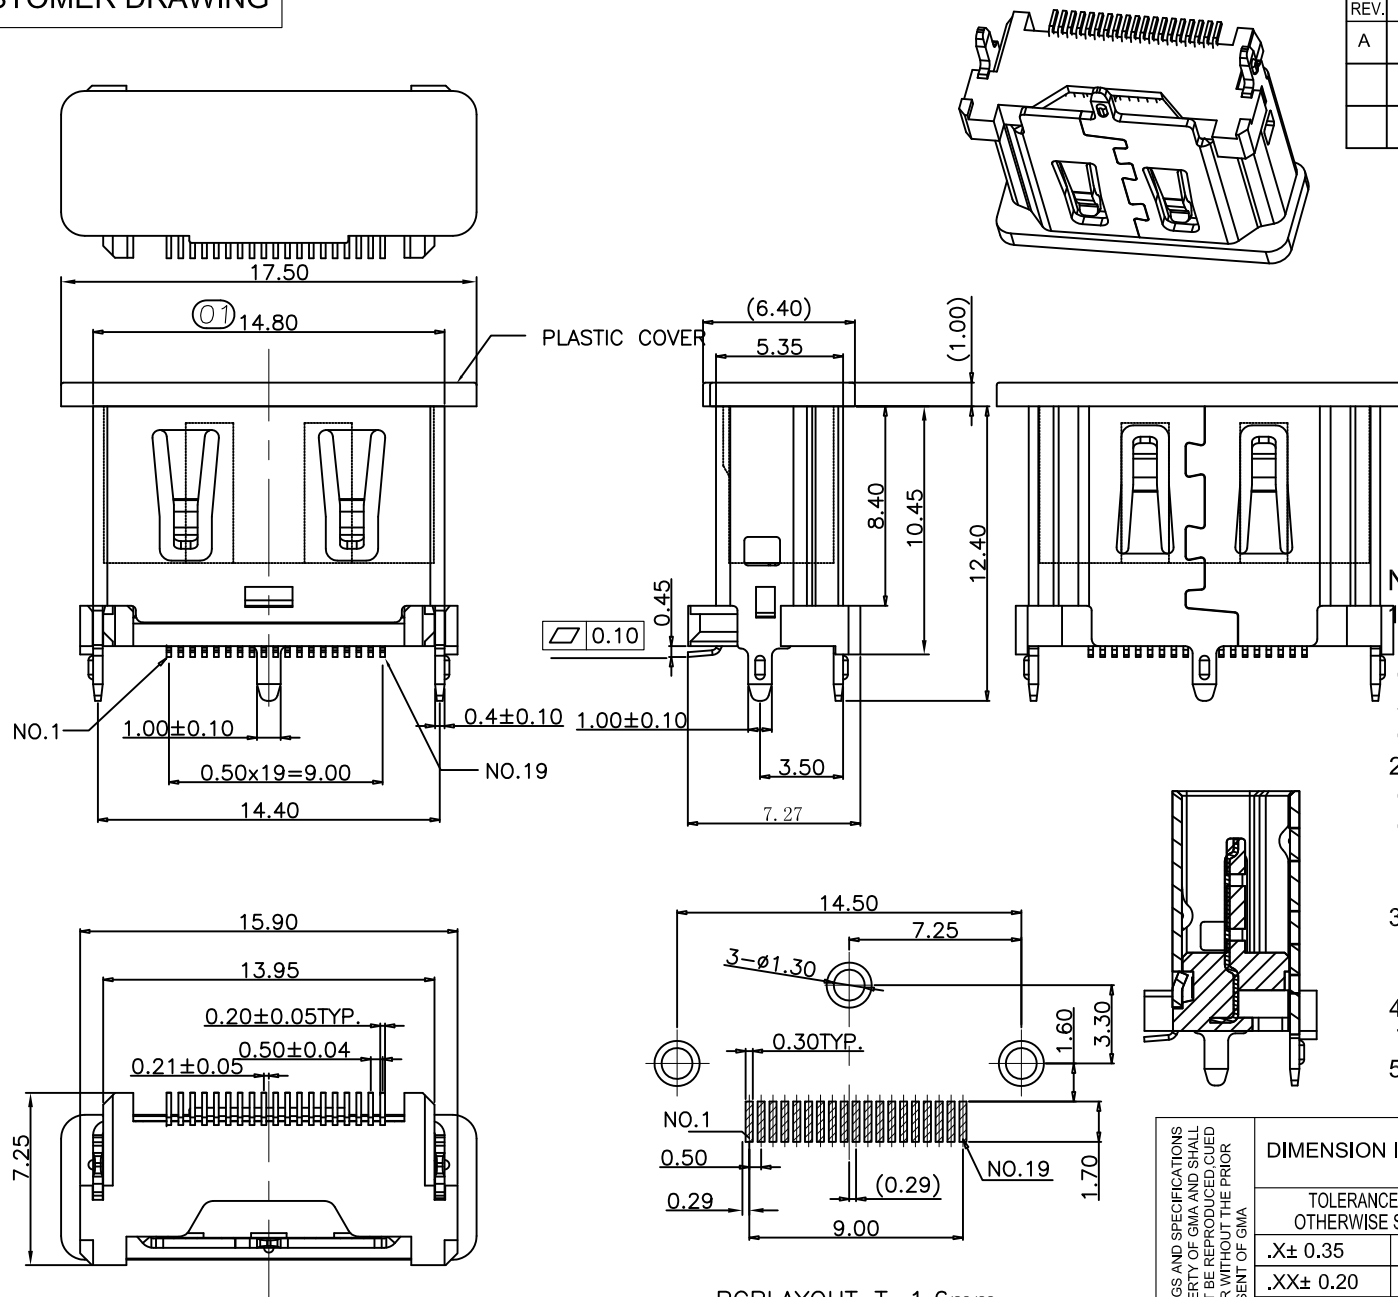

1211-0010-201-001
流水码
外壳电镀
2:铜壳镀镍
1:黑胶
电镀规格
1:GOLD FLASH

NOTE:

- MATERIALS AND FINISHED
INSULATOR : LCP UL-94V0,
COVER:LCP UL-94V0
SHELL : C2680, NI FINISHED
CONTACT MATERIAL :C5191 GOLD FINISHED
- ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING : 0.5 AMPS
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 100 MEGAOHMS MIN.
- MECHANICAL
MATING FORCE:4.5Kgf MAX.
UNMATING FORCE:1.0 Kgf MIN
- ENVIRONMENTAL
TEMPERATURE RATING : -55°C ~ +105°C
- HOW TO ORDER:

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF GMA AND SHALL
NOT BE REPRODUCED OR COPIED IN
ANY MANNER WITHOUT THE PRIOR
WRITTEN CONSENT OF GMA

DIMENSION IN mm [Inch]		GMA 东莞市国满电子科技有限公司 Dongguan Guoman Electronic Technology Co., Ltd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		料号 FILE NO.	图号 DWG NO.
.X± 0.35	X°± 3°	1211-0010-201-001	1211-0010-1
.XX± 0.20	.X°± 2°	名称 TITLE	
.XXX± 0.15	.XX°± 1°	HDMI A/F 立贴10.5	
核准 APPROVE	审核 CHECK	制图 DRAW	角法 PROJ.
		比例 SCALE 1:1	张数 SHEET 1/1
		版次 REV A	图纸 SIZE A4