

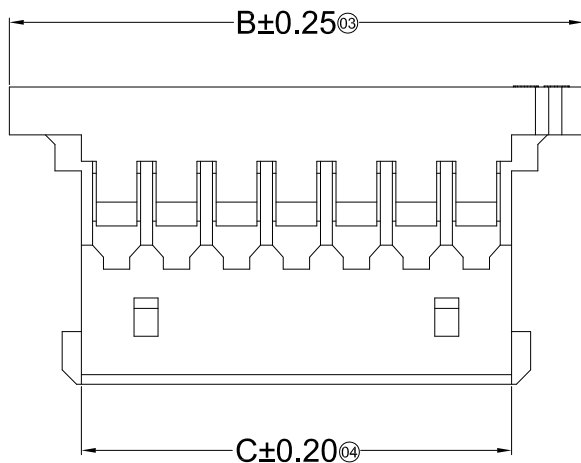
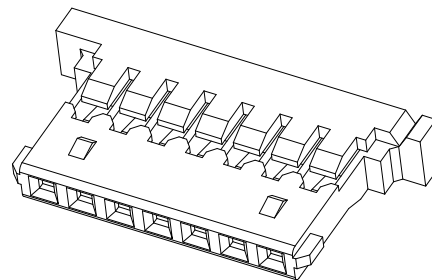
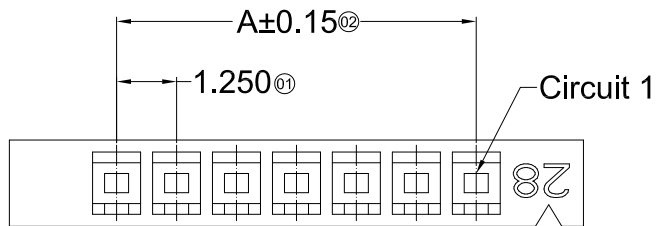



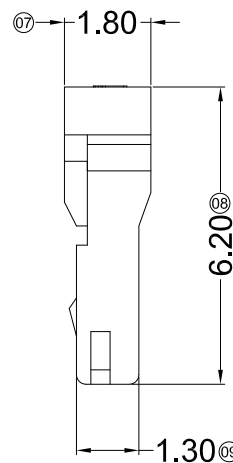

04P~30P Double Salient
Scale 1:1

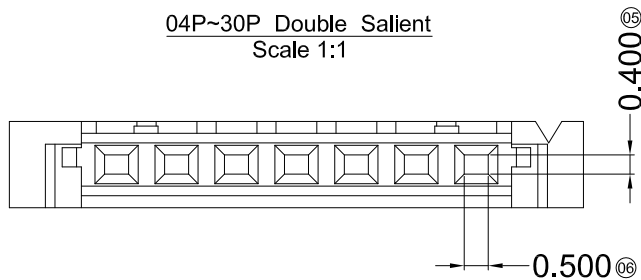

02P~03P Single Salient
Scale 1:2

Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

X9827 H X-XX X-N0 HF XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: Blank-ordinary
- ④ Row No.-Pin No.: XX-02P~30P
- ⑤ Plug the Pin & special No.:
- ⑥ Material: N0-PA66 94V-0
- ⑦ HF-Halogen free
- ⑧ Color: Blank-natural color; BK-Black

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.25	5.72	2.72	11	12.50	16.97	13.97
03	2.50	6.97	3.97	12	13.75	18.22	15.22
04	3.75	8.22	5.22	13	15.00	19.47	16.47
05	5.00	9.47	6.47	14	16.25	20.72	17.72
06	6.25	10.72	7.72	15	17.50	21.97	18.97
07	7.50	11.97	8.97	16	18.75	23.22	20.22
08	8.75	13.22	10.22	20	23.75	28.22	25.22
09	10.00	14.47	11.47	25	30.00	34.47	31.47
10	11.25	15.72	12.72	30	36.25	40.72	37.72

X9827H-XX-N0HFBK	Nylon 66 UL 94V-0 Black (Halogen-Free)	X9827T	X9827W
X9827H-XX-N0HF	Nylon 66 UL 94V-0 Halogen-Free		
X9827H-XX-N0	Nylon 66 UL 94V-0		
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					ANGULAR ±5°
△ X					L ≤ 4 ±0.2
△ X					4 < L ≤ 16 ±0.3
△ X					16 < L ≤ 63 ±0.4
△ X					L > 63 ±0.5
REVISIONS					
Authorized Signature(s)					

DSND		DATE		SCALE: N/A	MODEL TYPE: X9827H-XX-N0XX
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	1.25mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0