

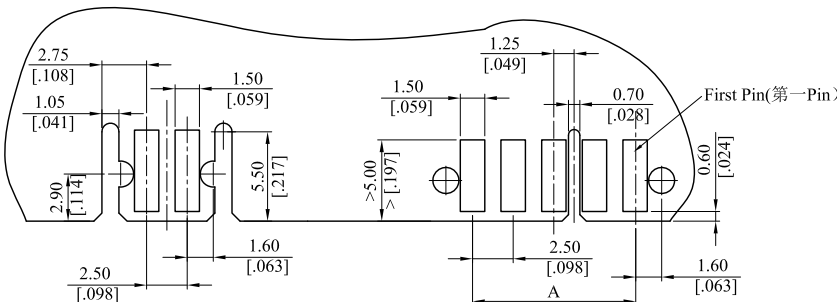







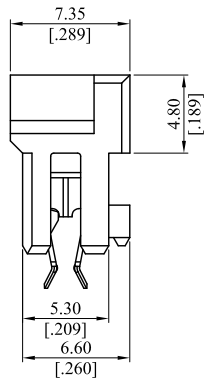

PCB LAYOUT

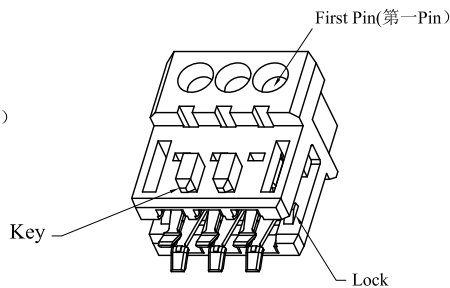

$A = 2.50 * (\text{No. of circuit} - 1)$
 $B = A + 5.0$

Specifications :

- Voltage rating:250vAC / DC
- Temperature range -40 to +110
- Insulator:PA66 UL 94V-0 Nature.
- Terminal:Phosphor Bronze

X2514H I-XXL-X-XX

- ① Series No.
② Category: H-HSG
③ Welding Board Angle: I-HSG+hardware
④ Row No.-Pin No.: XX-Single row
⑤ L:With Lock
⑥ 0= Tin plated 120~200u" over Ni 30u" overall, for AWG #22~#24
1= Tin plated 120~200u" over Ni 30u" overall, for AWG #26.
G= Gold Flash over Ni 80~150u" overall.
⑦ See the Table of next page.

X2514HI-XXL-X-XX	PA66 94V-0	AWG #22-#24 AWG #26	Phosphor Bronze	X2514W
PART NO	Material	Wire Range	Material(Terminal)	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					
△ X					
MARK					

DSND		DATE	SCALE: N/A	MODEL TYPE: X2514HI-XXL-X-XX
DWN		DATE	VIEW:	PART NO.: 2.5 mm IDC Style Connectors
CHKD		DATE	UNIT: mm	DWG NO.:
APPD		DATE	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g
				SHEET 1/1
				REVISION A0