

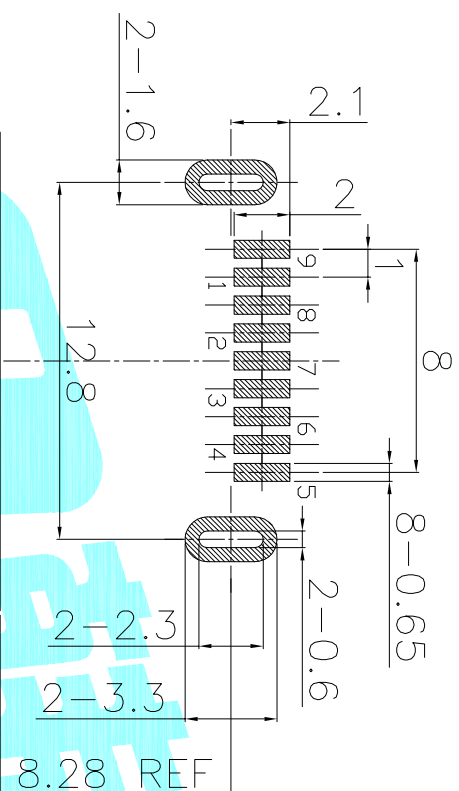


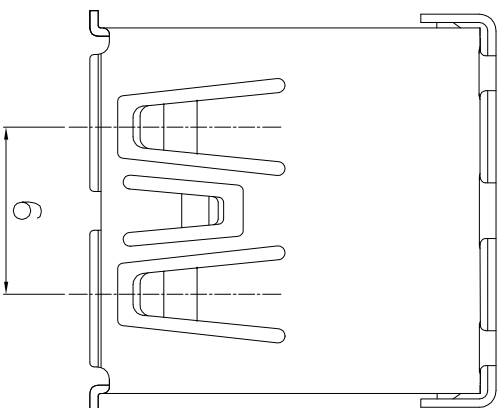

RECOMMENDED PCB LAYOUT

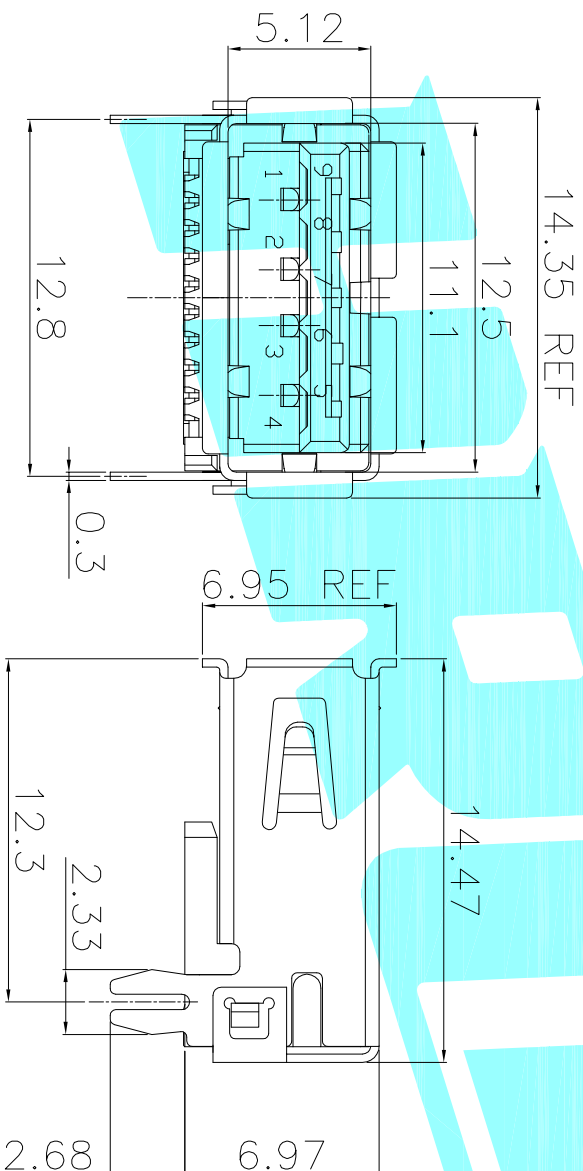

NOTES:

- 1.Specifications
 - 1-1.INSERT FORCE:35N MAX.
 - 1-2.WITHDRAW FORCE:10N MIN.INITIAL
8-20N AFTER
 - 1-3.Current rating:1.0A
 - 1-4.Voltage Rating:30V
 - 1-5.Life Test:10000 CYCLES MIN.
 - 1-6:Dielectric withstanding:voltage100V AC

PIN NUMBER	1	2	3	4	5	6	7	8	9	SHELL
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSTR+	SHIELD
	A				NEW					
ECN NO.	REV.	DATE.			DESCRIPTION.		CHANGE.	CHECK.	APPRO.	
					TOLERANCES ARE	30~以上 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	±2°	DRAWING NO.
					APPROVALS					
					CHECKED					
					TITLE:	USB CONNECTOR				
					PART NO.	U-A-39DS-Y-1				
					DRAWN	D.JLV	2020/8/1	ELECTRONICS CO.,LTD		
										