


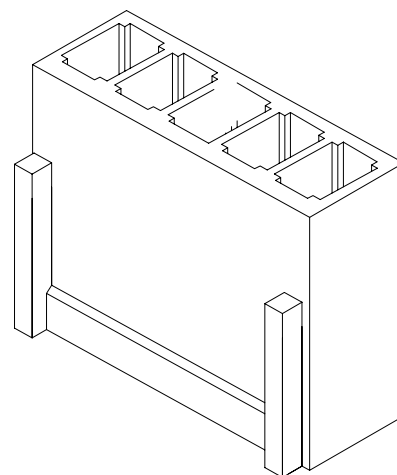

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

① ② ③ ④

① Series No.

② Category: H-HSG

③ Row No.-Pin No.:XX-Single row

④ Material: N0-PA66 94V-0

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	5.08	10	22.86	26.12
03	5.08	8.34	11	25.4	28.66
04	7.62	10.88	12	27.94	31.2
05	10.16	13.42	13	30.48	33.74
06	12.7	15.96	14	33.02	36.28
07	15.24	18.5	15	35.56	38.82
08	17.78	21.04			
09	20.32	23.58			

DSND		DATE		SCALE: N/A	MODEL TYPE: 2510H-XX-N2
DWN		DATE		VIEW: 	PART NO.:
CHKD		DATE		UNIT: mm	2.54 mm Crimp Style Connector
APPD		DATE		SIZE: A4	DWG NO.:

S	XKB INDUSTRIAL PRECISION CO.,LIMITED	WEIGHT	SHEET	REVISION
		1.0g	1/1	A0

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

	XKB INDUSTRIAL PRECISION CO., LIMITED				ANGULAR	± 5°
△ X	香港星坤工業精密有限公司				L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK	DESCRIPTION				DATE	REVISED
					APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					Authorized Signature(s)	

XKB INDUSTRIAL PRECISION CO.,LIMITED