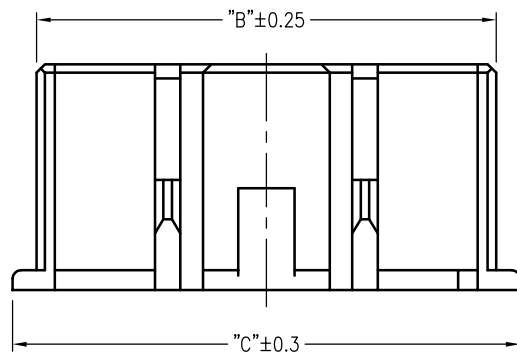
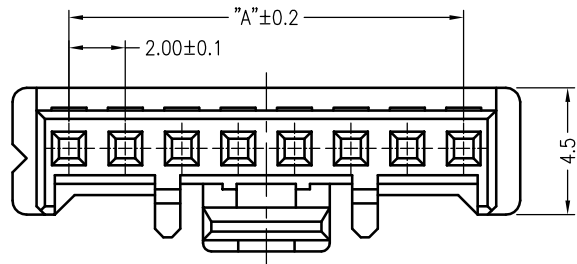


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

X2000 H-XX-N0

① ② ③ ④

- ① Series No.
- ② Category: H-HSG
- ③ Row No.-Pin No.: XX-02P~16P
- ④ Material : N0-PA66 94V-0

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	4.34	6.10	10	18.00	20.34	22.10
03	4.00	6.34	8.10	11	20.00	22.34	24.10
04	6.00	8.34	10.10	12	22.00	24.34	26.10
05	8.00	10.34	12.10	13	24.00	26.34	28.10
06	10.00	12.34	14.10	14	26.00	28.34	30.10
07	12.00	14.34	16.10	15	28.00	30.34	32.10
08	14.00	16.34	18.10	16	30.00	32.34	34.10
09	16.00	18.34	20.10				

X2000H-XX-N0	PA66 UL 94V-0	X2000T	X2000W
PART N0	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					ANGULAR $\pm 5^\circ$
△ X					$L \leq 4$ ± 0.2
△ X					$4 < L \leq 16$ ± 0.3
					$16 < L \leq 63$ ± 0.4
					$L > 63$ ± 0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: X2000H-XX-N0
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	2.00mm Crimp Style Connector
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0