
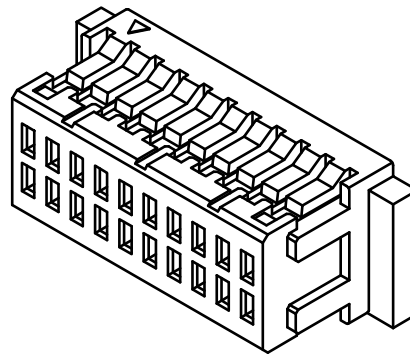
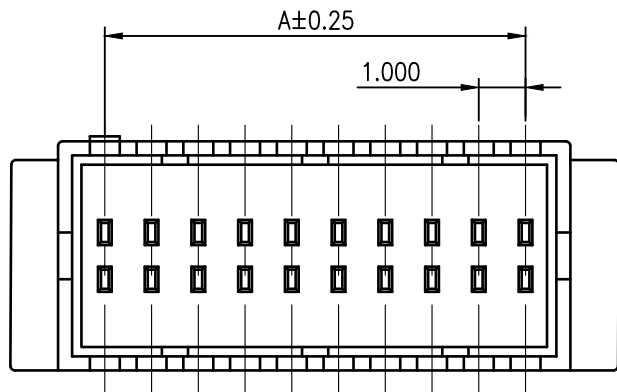
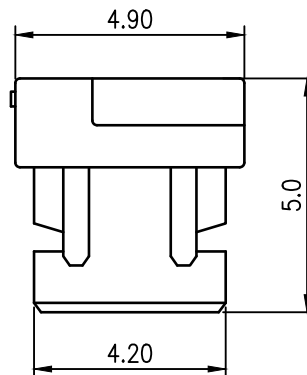


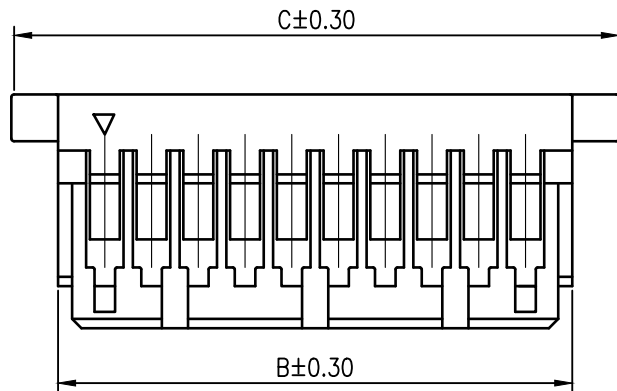

◆ SPECIFICATIONS

- χCurrent rating: 1A AC, DC
- χVoltage rating: 50V AC,DC
- χTemperature range: -25℃ ~ +85℃
- χInsulation resistance: 100M_Ω Min.
- χWithstanding voltage: 500V AC/ minute.
- χContact resistance: 20mΩ Max.

X1011 H -2*XX -N0HF

- ① Series No.
- ② Category: H-HSG
- ③ Row No.-Pin No.: 2*XX-2*10P~2*25P
- ④ Material: N0-PA66 94V-0
- ⑤ HF-Halogen free

Poles	Dimensions(mm)		
	A	B	C
2*05	4.00	6.20	8.00
2*08	7.00	9.20	11.00
2*10	9.00	11.20	13.00
2*15	14.00	16.20	18.00
2*20	19.00	21.20	23.00
2*25	24.00	26.20	28.00

X1011 H -2*XX -N0HF	PA66 UL 94V-0 Halogen Free	X1011T	X1011W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	±5°
△ X					L ≤ 4	±0.2
△ X					4 < L ≤ 16	±0.3
MARK					16 < L ≤ 63	±0.4
					L > 63	±0.5
DESCRIPTION			DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS			Authorized Signature(s)			

DSND		DATE		SCALE: N/A	MODEL TYPE: X1011 H -2*XX -N0HF
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	1.00 mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	