

A

B

C

D

E

F

A




B

C


D

E


F

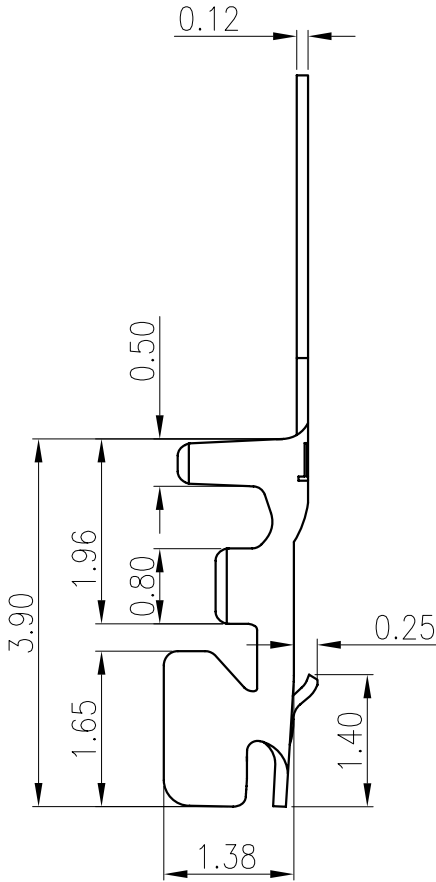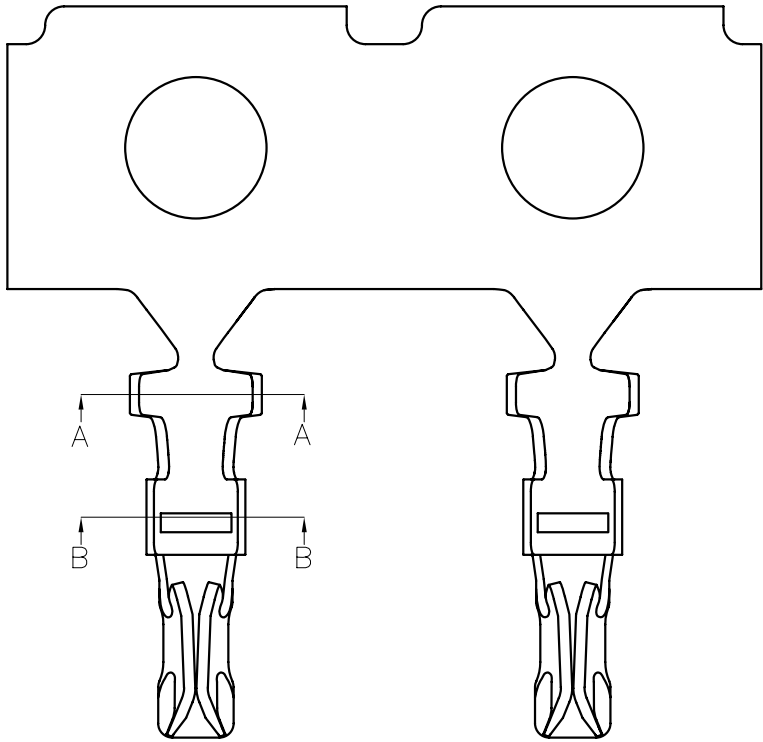

Section A-A



Section B-B



Section C-C

◆SPECIFICATIONS

- χCurrent rating: 1A AC, DC
- χVoltage rating: 50V AC,DC
- χTemperature range: -25℃ ~ +85℃
- χInsulation resistance: 100M_Ω Min.
- χWithstanding voltage: 500V AC/ minute.
- χContact resistance: 20m_Ω Max.

Meterial: Phosphor Bronze
Finish: Plated Tin over Nickel
Applicable wires: AWG #28~#32
Insulation O.D 0.4 to 0.8mm

X1011 T-P XX X-X

① ② ③ ④ ⑤ ⑥

- ① Series Number
- ② Category: T-terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style:
 - ⑤ V01-All Gold Flash ; SN-Bright tin plating
- ⑤ Plating method: Blank-Stamping before plating
- ⑥ Mold No./Mark/Special No.

X1011T-PV01	Phosphor Bronze	AWG#28-32	0.80mm(Max)	Stamping Before Pating:30u" Ni;Whole Gold ;Gold Flash	X1011H
X1011T-PSN	Phosphor Bronze	AWG#28-32	0.80mm(Max)	Stamping Before Plating:30u" Ni;70u"Sn	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

	XKB INDUSTRIAL PRECISION CO., LIMITED						ANGULAR	± 5°
△ X	香港星坤工業精密有限公司						L ≤ 4	± 0.2
△ X							4 < L ≤ 16	± 0.3
△ X							16 < L ≤ 63	± 0.4
MARK	DESCRIPTION				DATE	REVISED	APPROVED	L > 63 ± 0.5
REVISIONS								UNSPECIFIED TOLERANCES
Authorized Signature(s)								

DSND	DATE	SCALE: N/A	MODEL TYPE: X1011T-PSN
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	1.00mm Crimp Style Connectors
APPD	DATE	SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT
			1.0g
			SHEET
			1/1
			REVISION
			A0

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司