
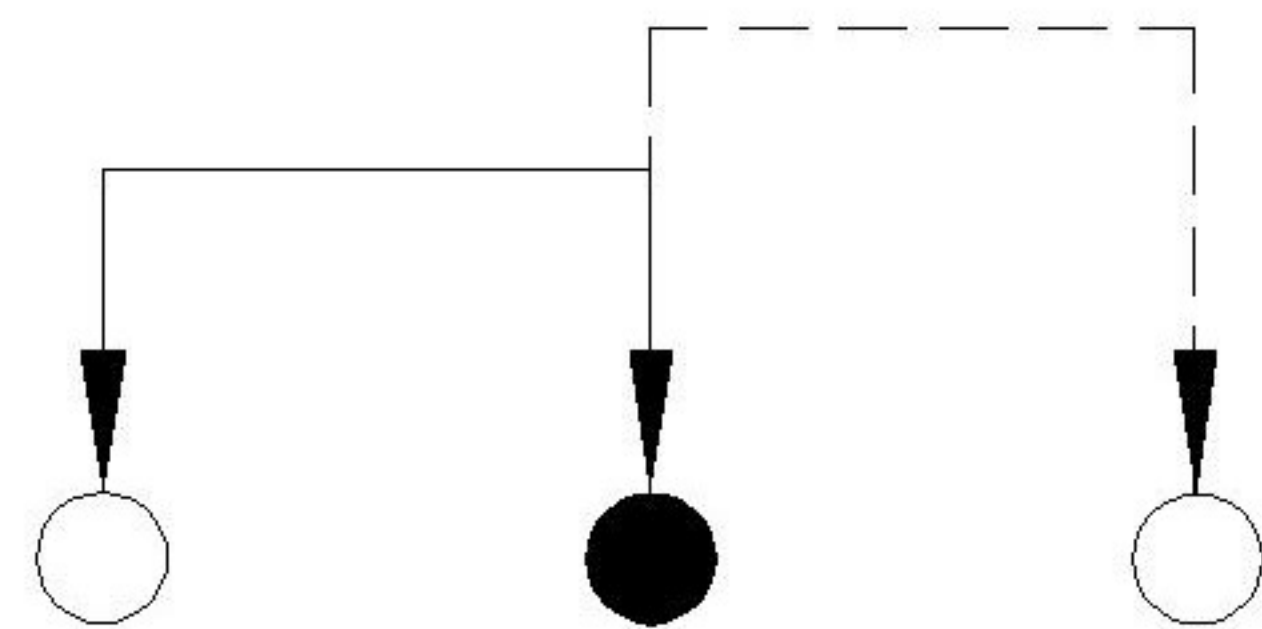


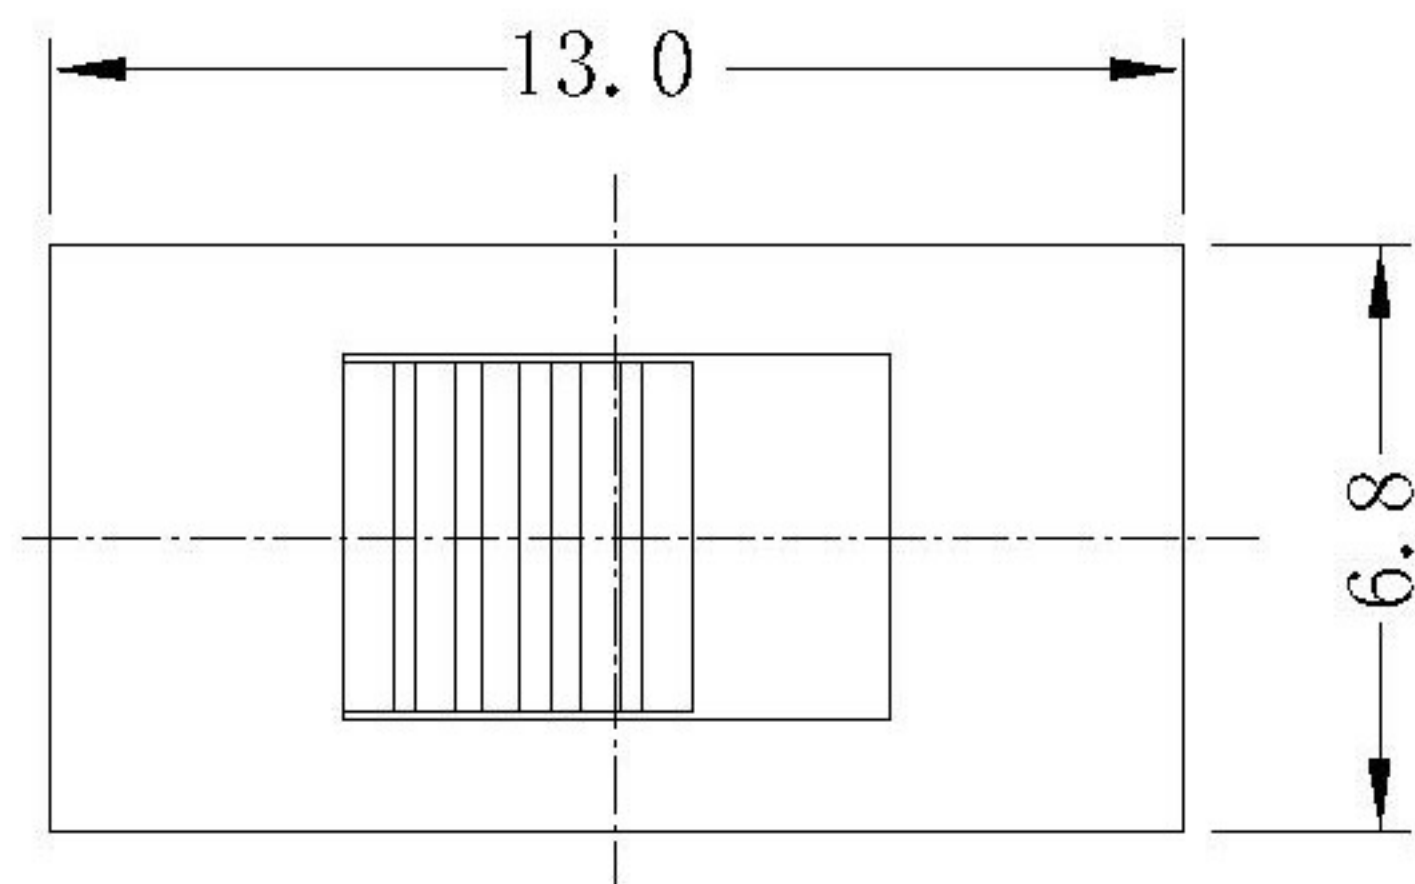

SCHEMATIC (NON-SHORTING)




MODEL CODE

SS-12D10-X-X-X


Knob Type
L
G

H (mm)
2 ~ 12

Colour
B:Black
R:Red

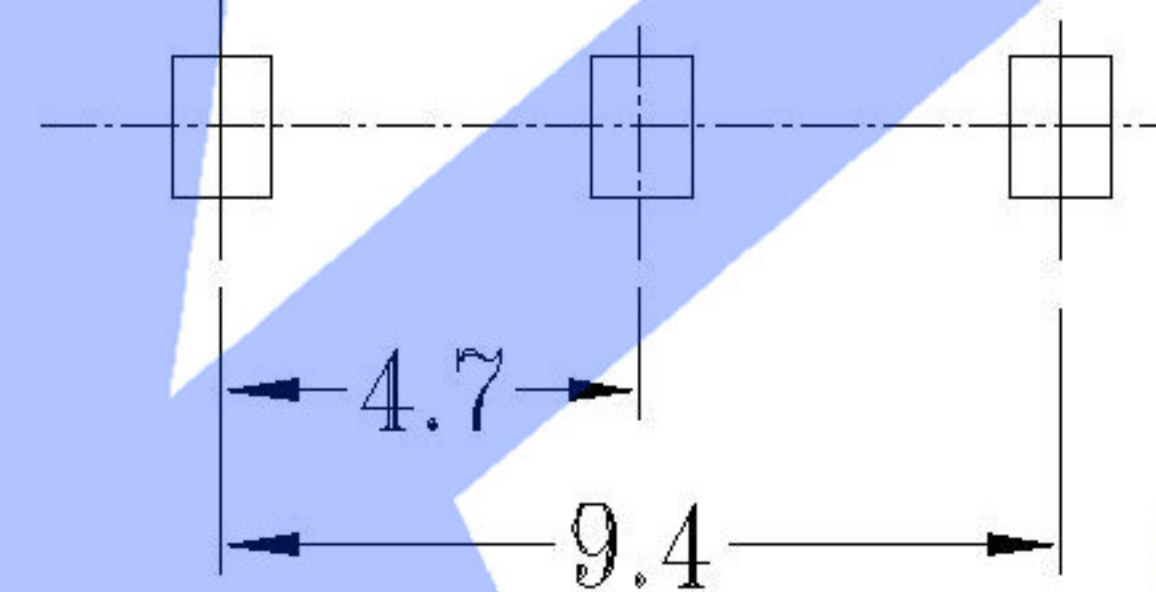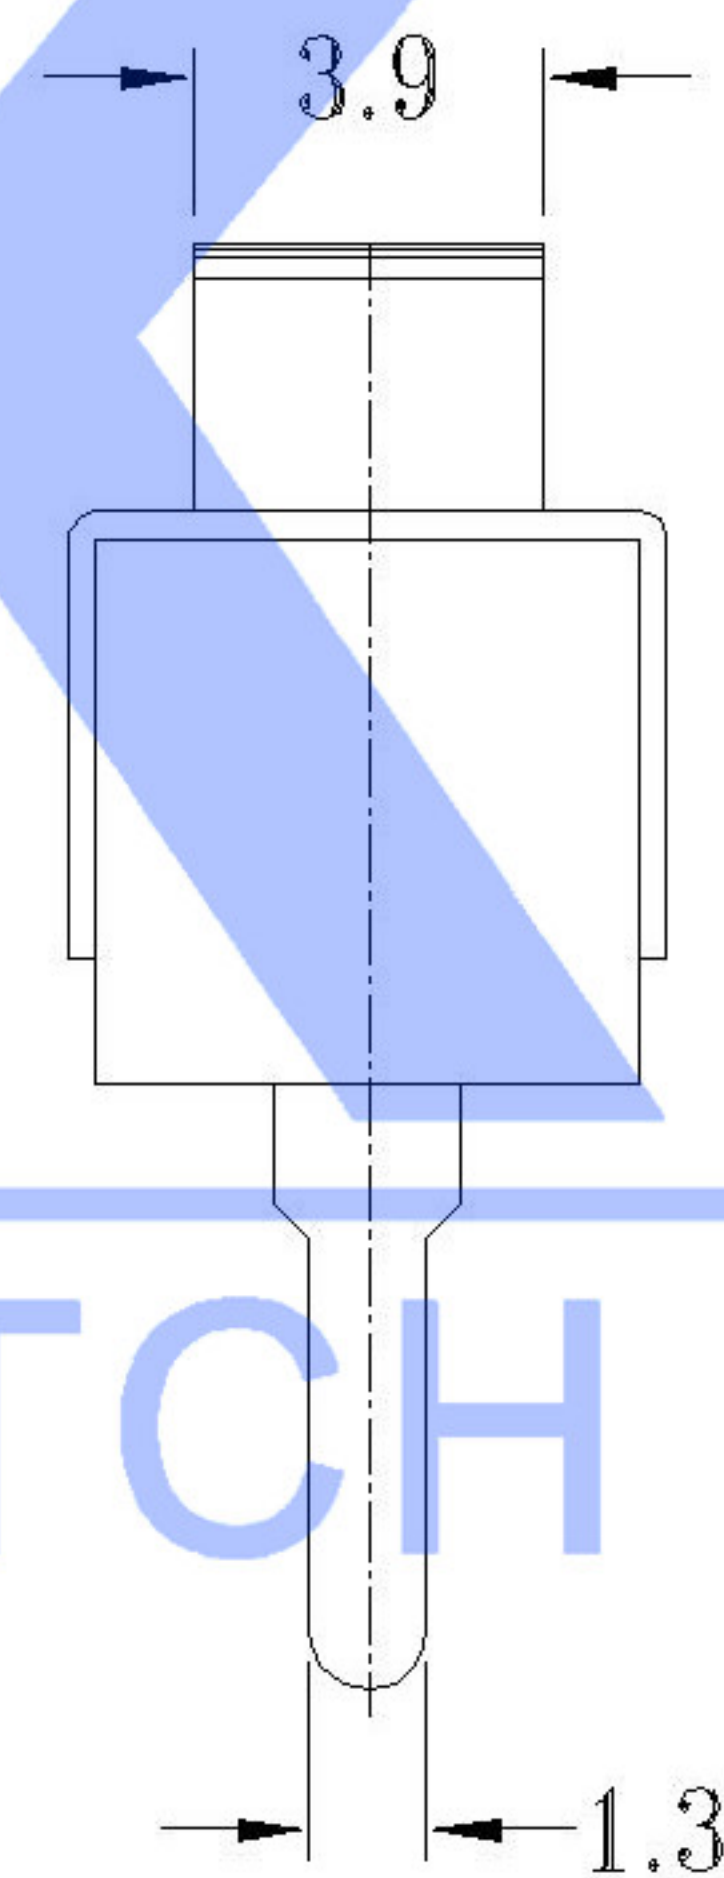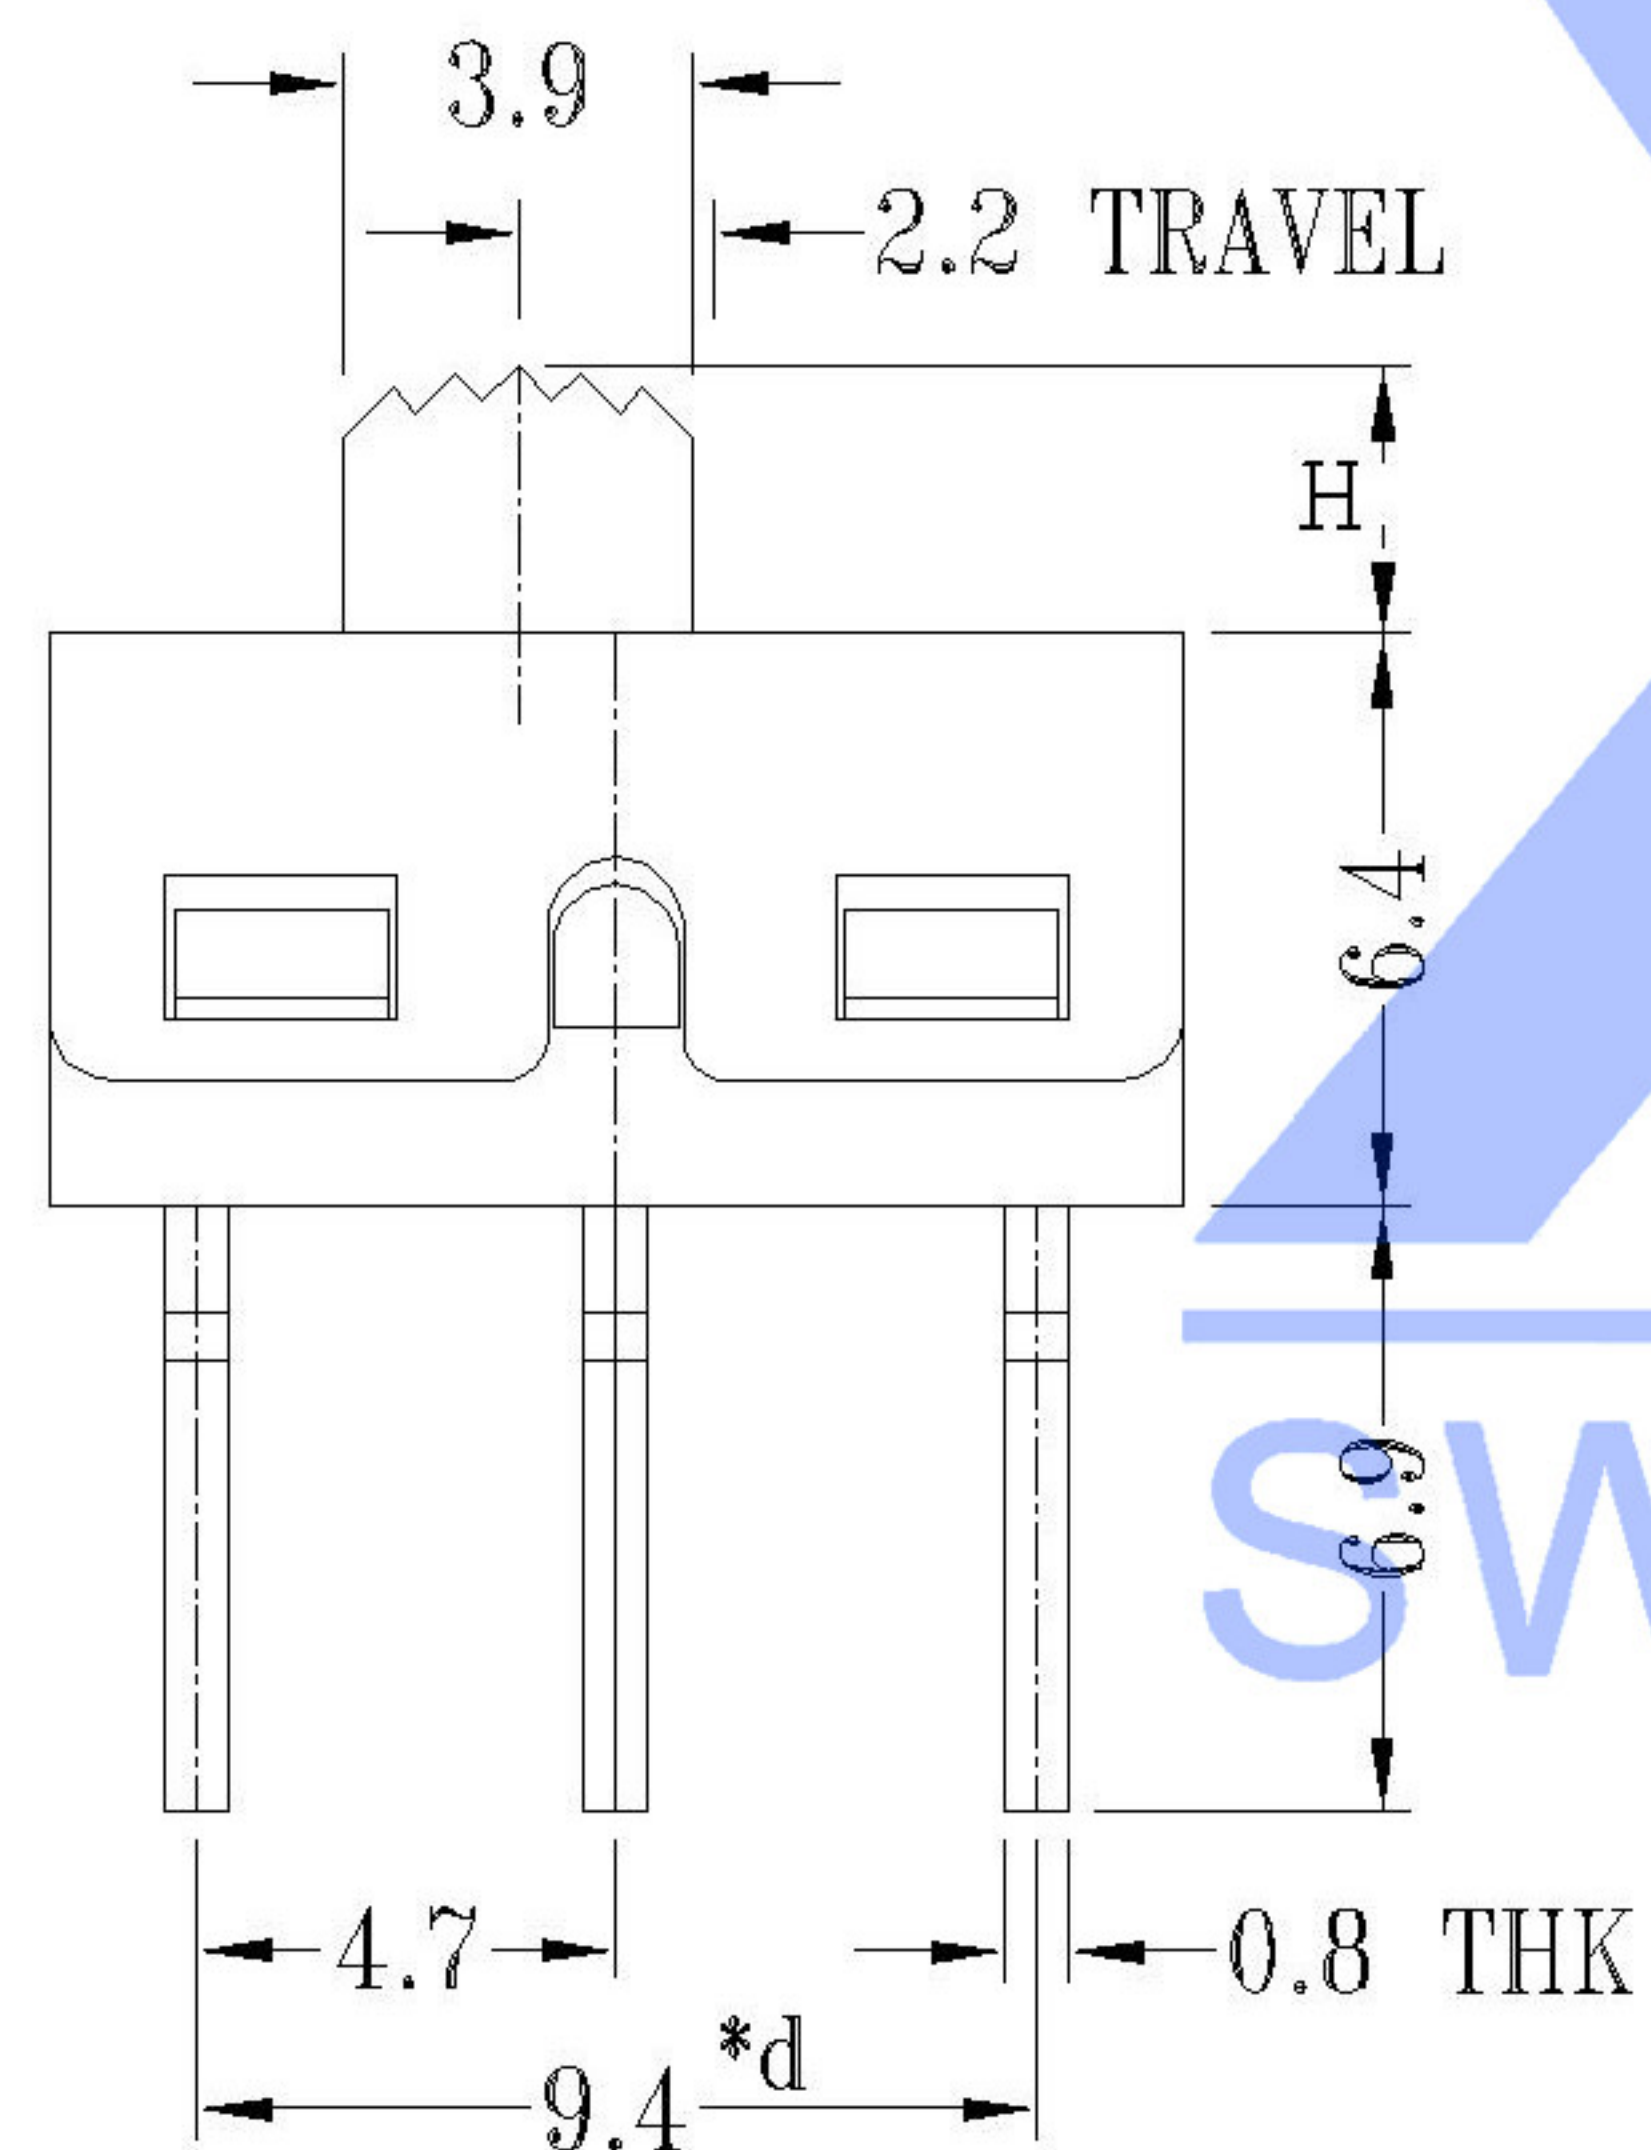

P.C.B LAYOUT
BOTTOM VIEW

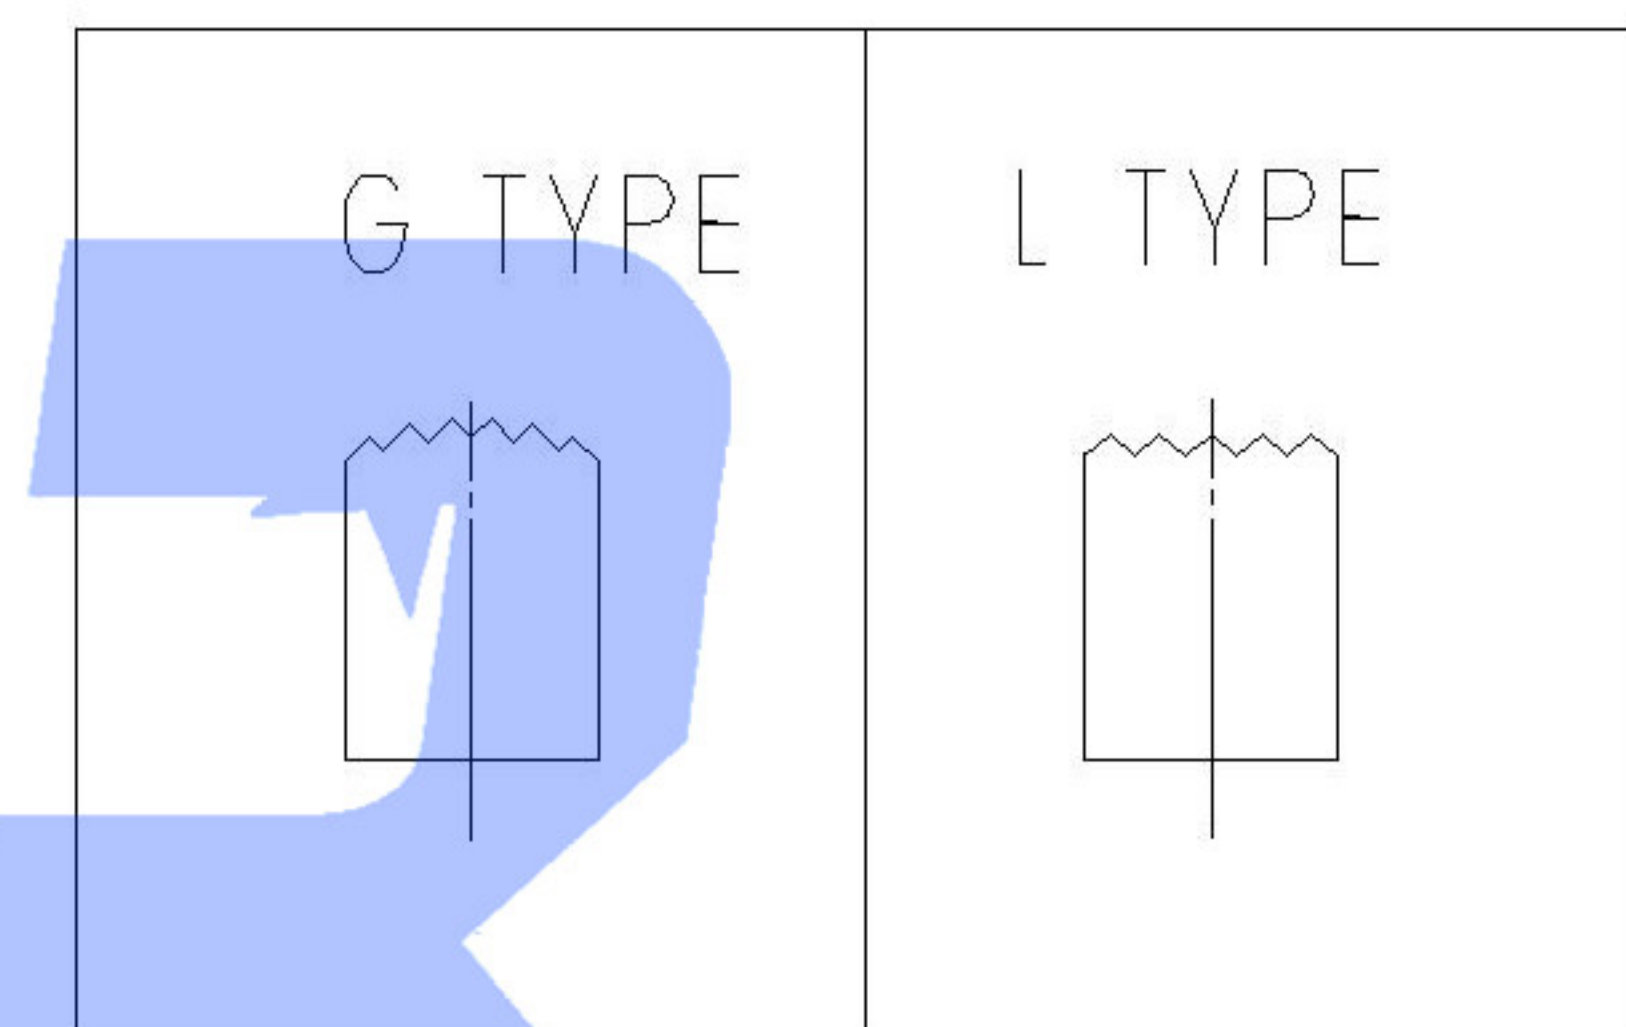

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					ANGLAR	±5°
△X					X.X	±0.2mm
△X					X.XX	±0.1mm
△X					X.XXX	±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED		
REVISIONS					UNSPECIFIED TOLERANCES	
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH	
DWN		DATE		VIEW:	PART NO.:	
CHKD		DATE		UNIT: mm	DWG NO.:	
APPD		DATE		SIZE: A4	SS-12D10-XX-X	
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1
						REVISION A0