
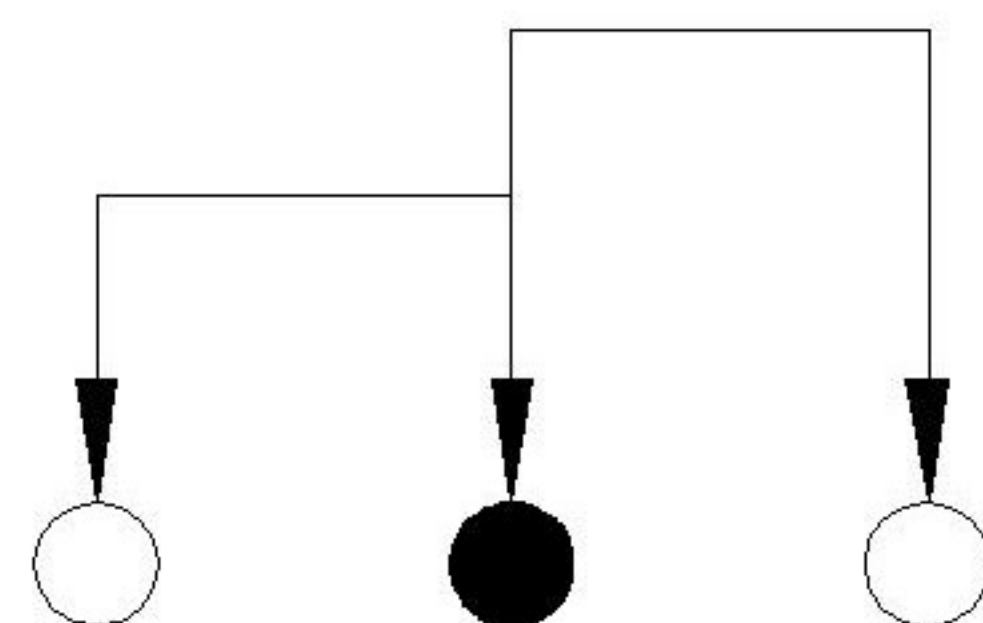


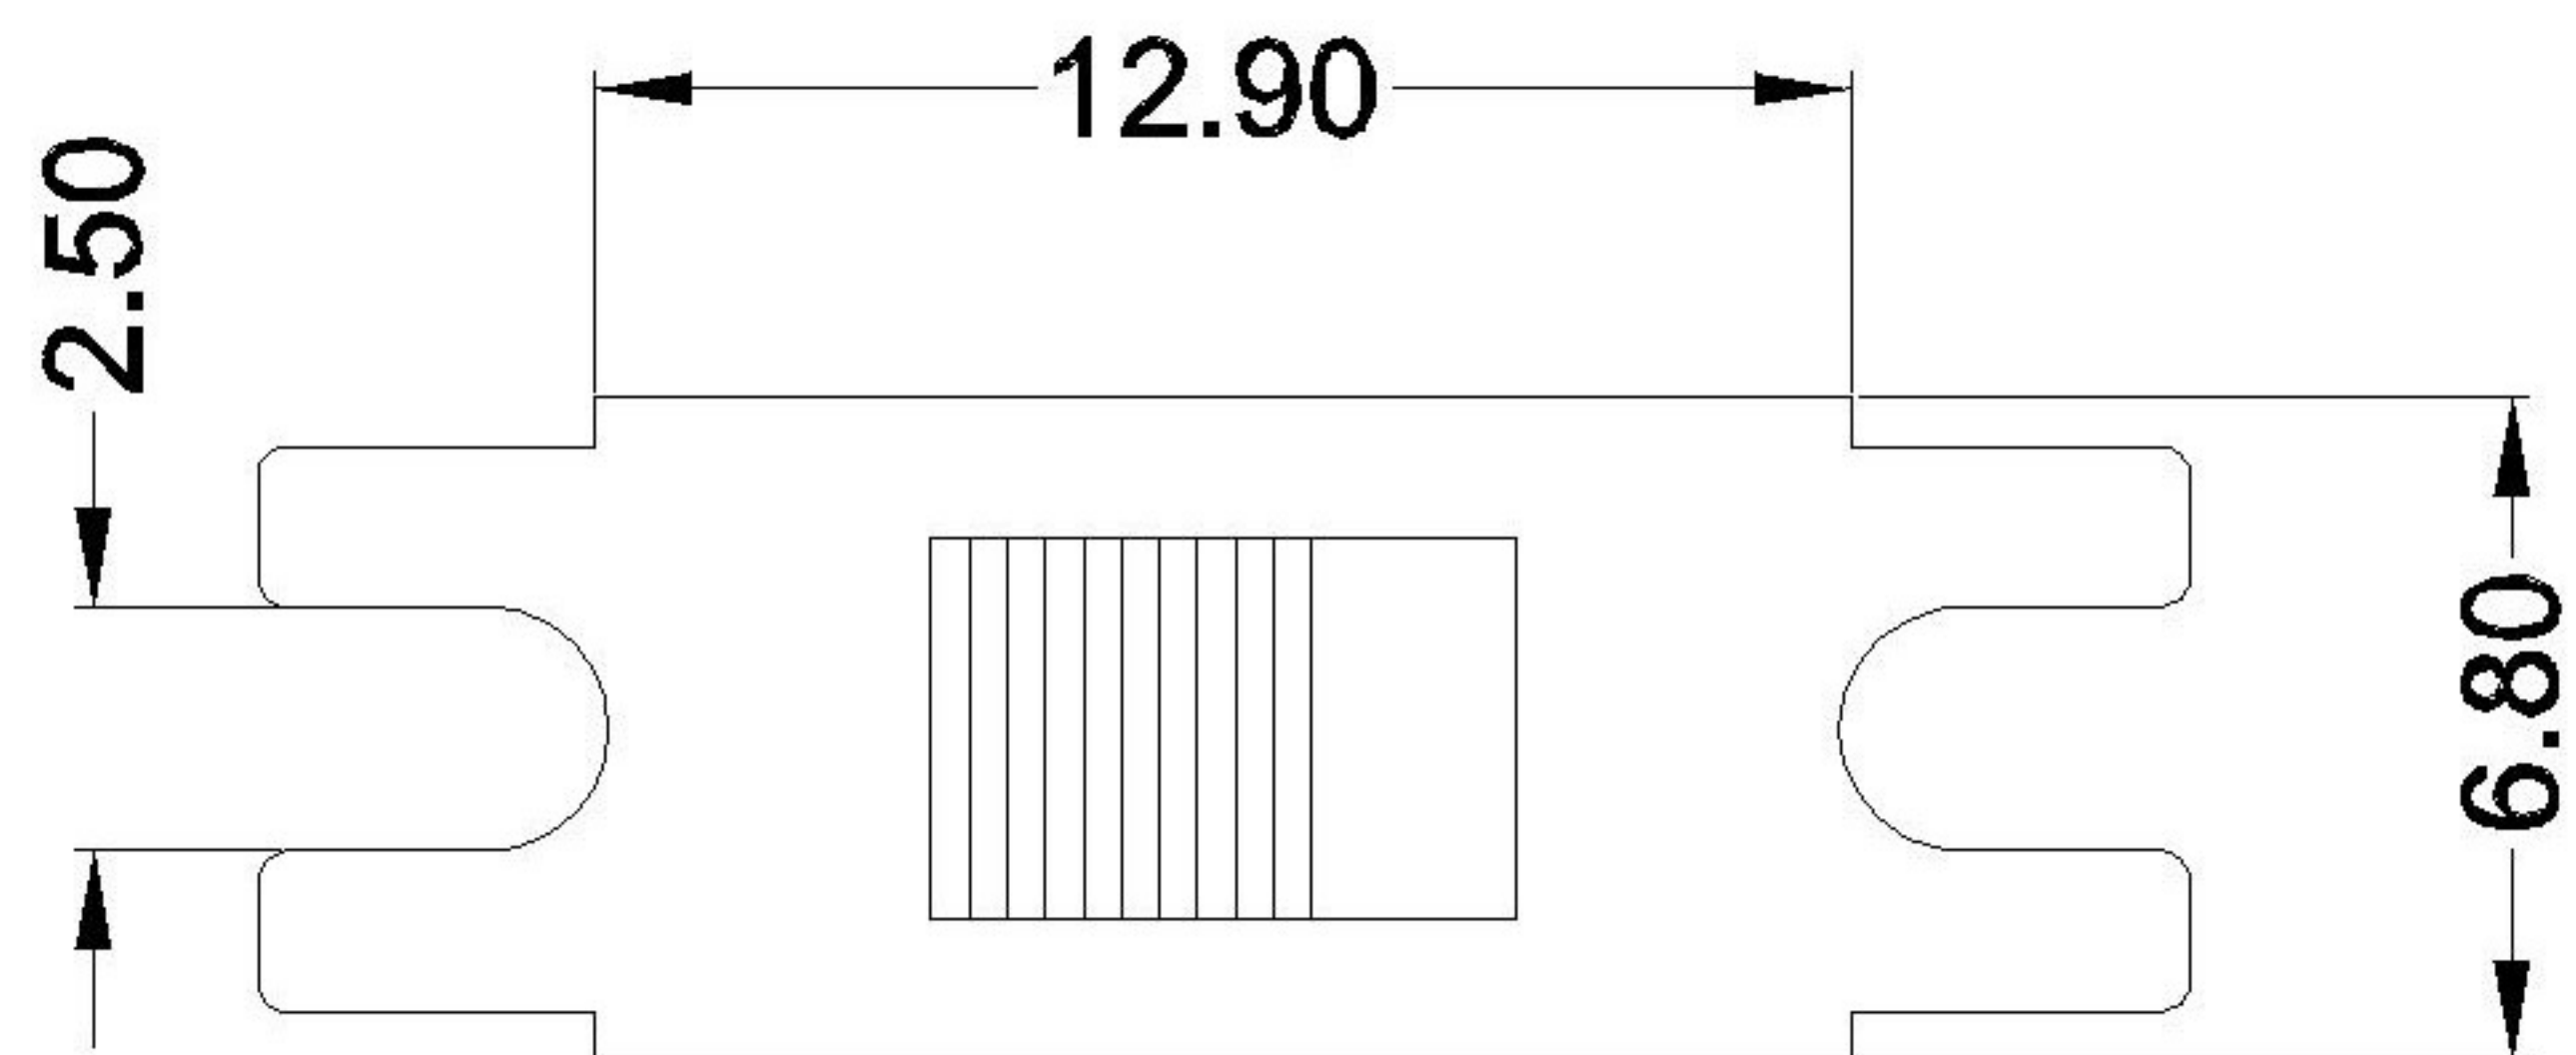

SCHEMATIC



MODEL CODE

SS-12D16-X-X-X

Knob Type
L
G

H (mm)
2 ~ 12

Colour
B:Black
R:Red

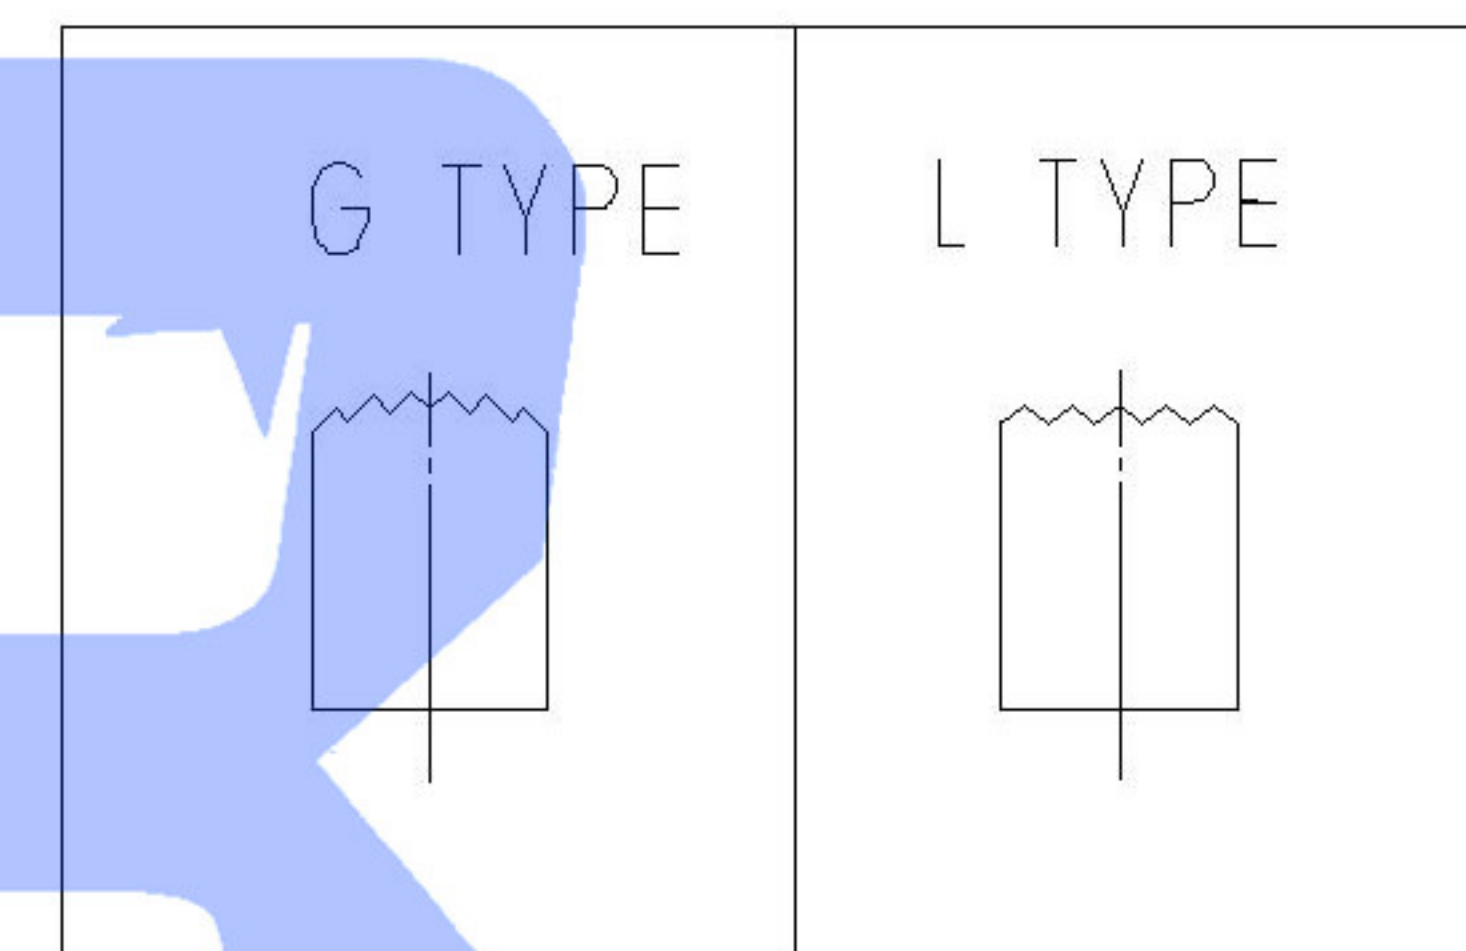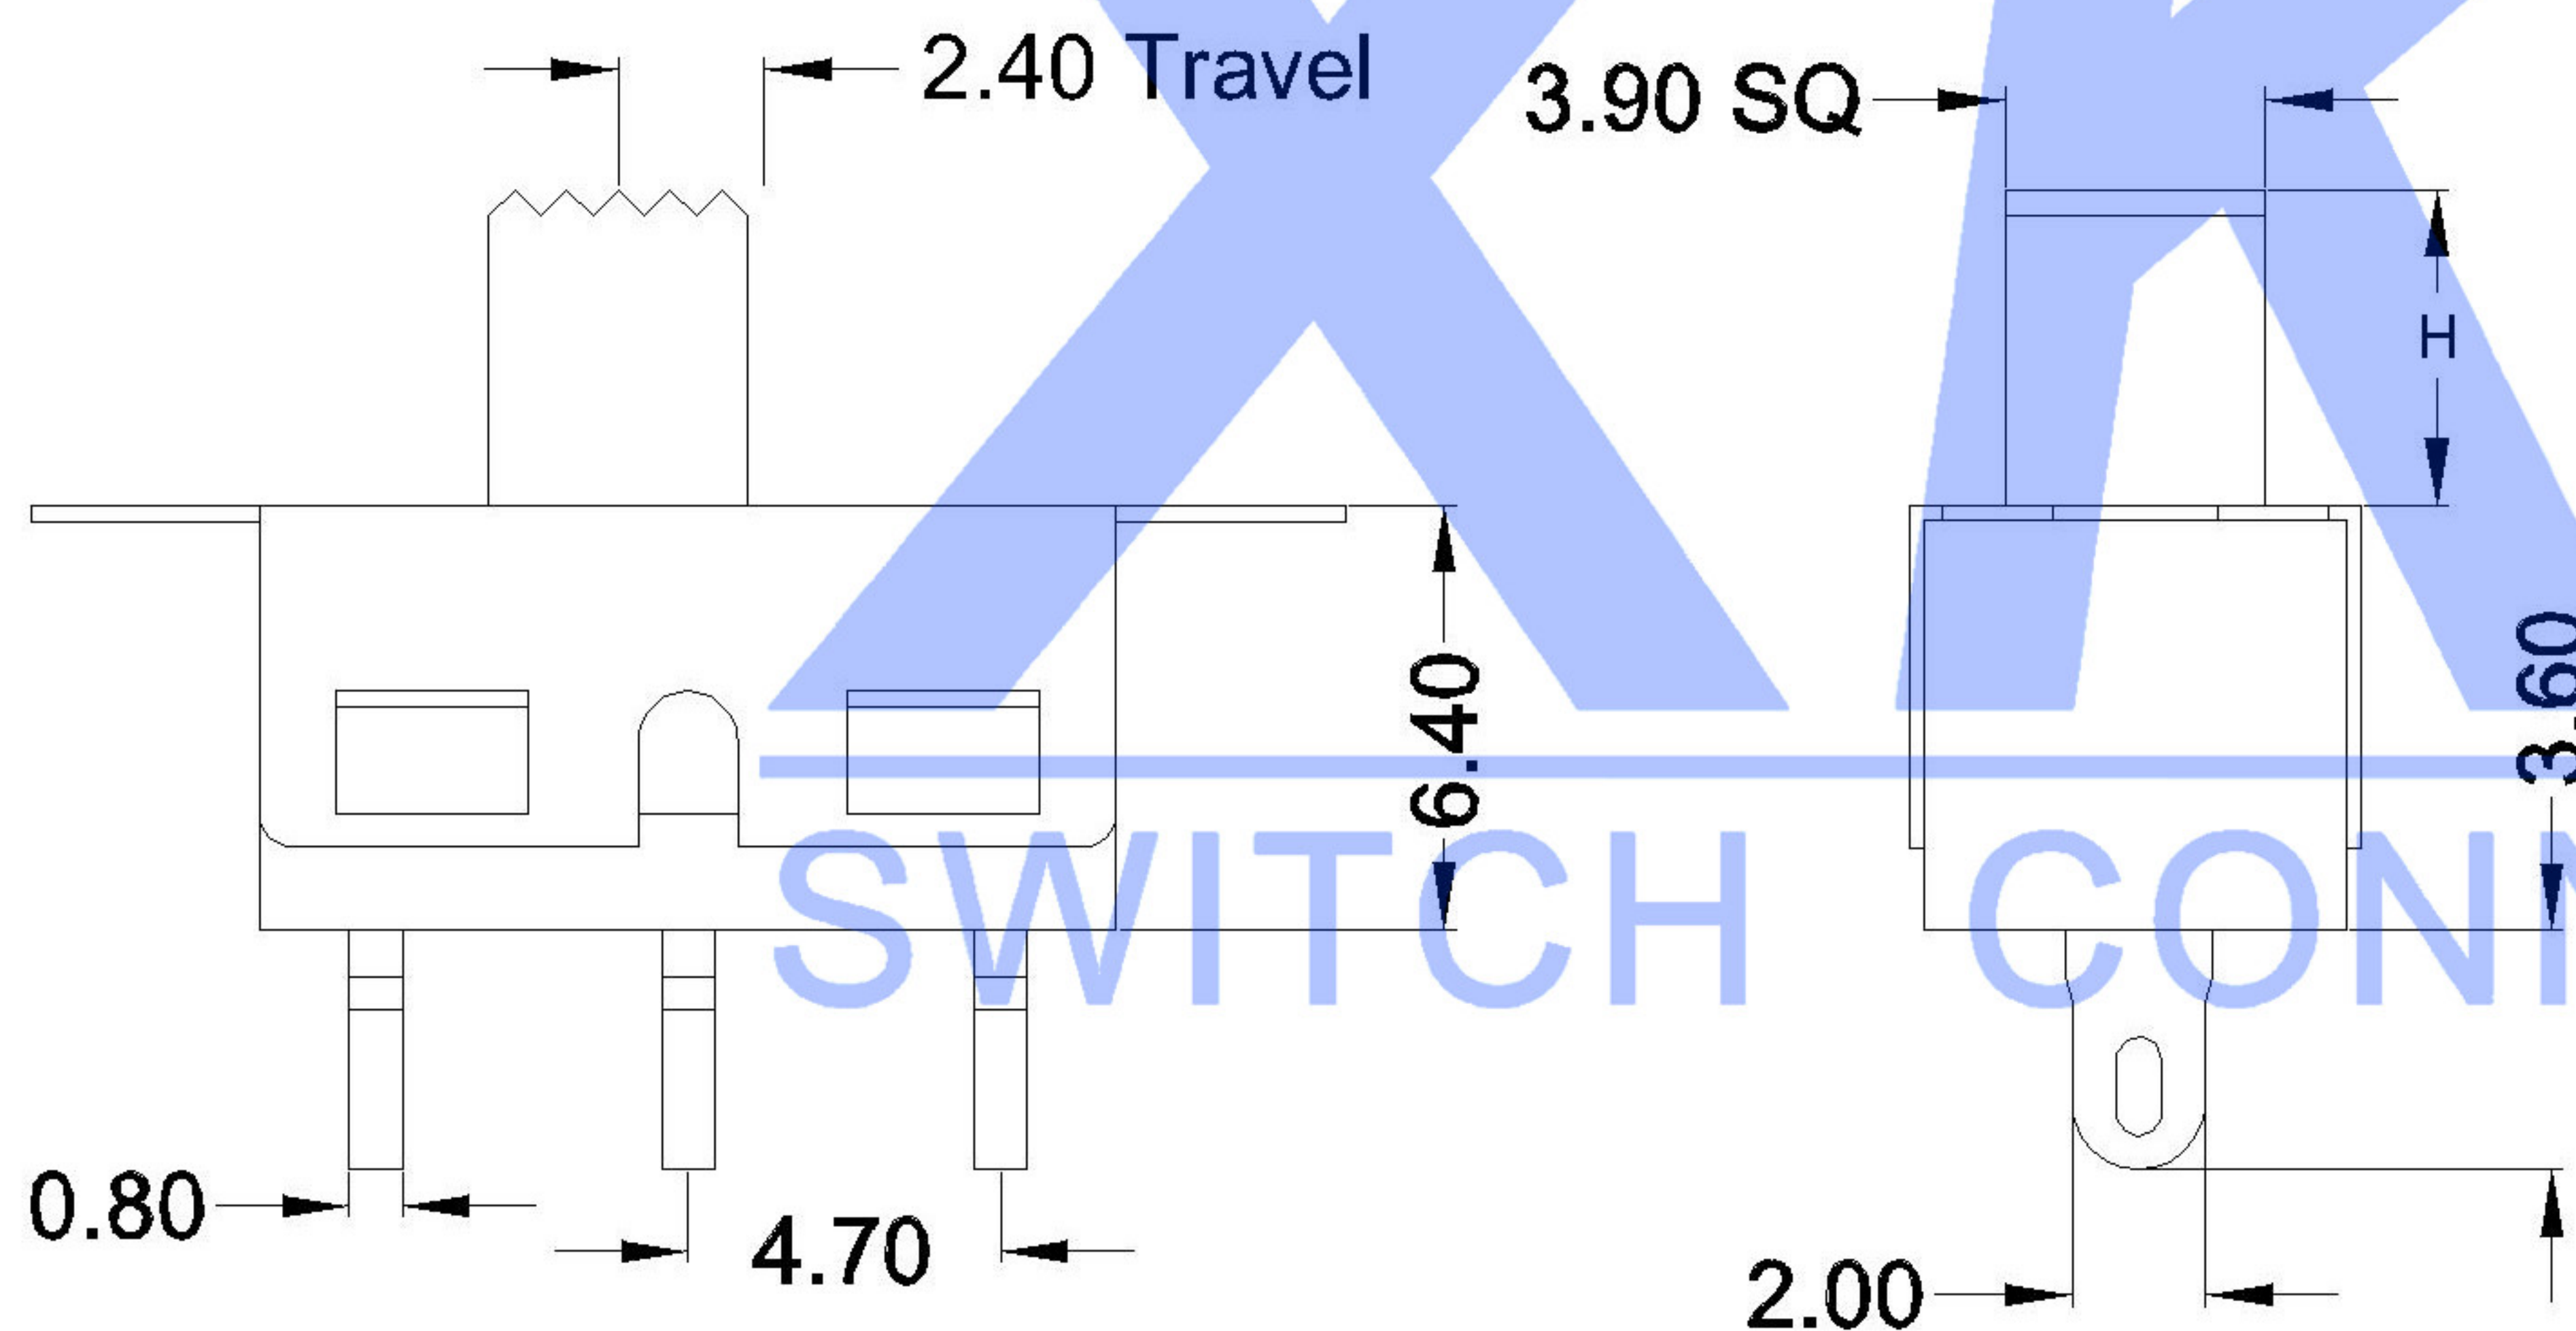

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 10,000 cycles

⑤	Terminal	—	3	Copper Alloy	silver plated	—
④	Contact	—	1	Copper Alloy	silver plated	—
③	Housing	—	1	Stainless Steel		—
②	Slide Handle	—	1	Nylon		—
①	Case	—	1	Diallyl Phthalate (DAP)		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
△X						ANGLAR				VIEW:	PART NO.:
△X						X.X	±5°				
△X						X.XX	±0.2mm				
MARK	DESCRIPTION	DATE	REVISED	APPROVED		X.XXX	±0.1mm			UNIT: mm	DWG NO.:
							±0.05mm			SIZE: A4	SS-12D16-XX-X
REVISIONS						UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO.,LIMITED		
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn									WEIGHT	SHEET	REVISION
									1.0g	1/1	A0