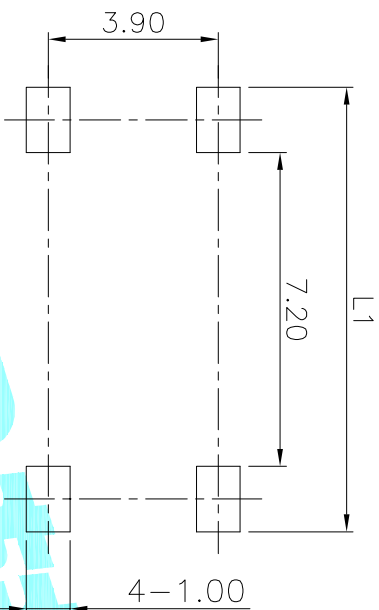
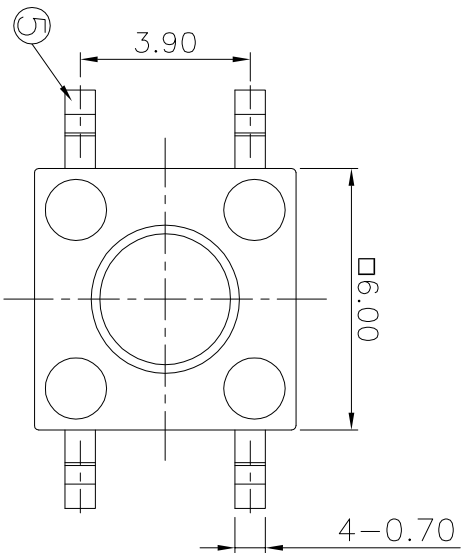



NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/Qty
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4	
PART NO	L L1
A	8 10
B	8.5 11
C	9 11
D	9.5 12
E	10 12

NO.5-NO.6	
PART NO	NOTE
01~99	SERIAL NUMBER

PCB Layout(Pattern side)

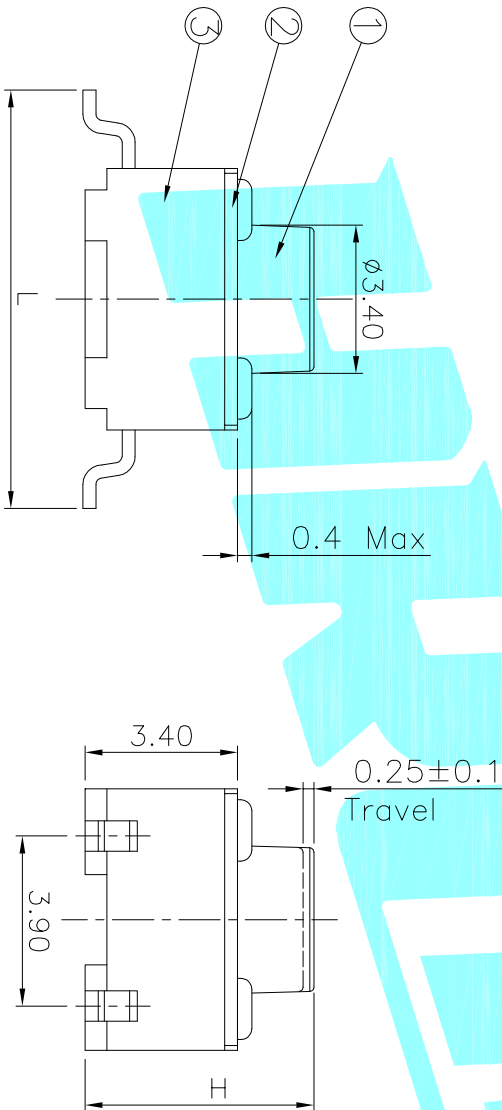

Typical Specifications
1.Rating : DC 12V 50mA
2.Life : 1,000,000 Cycles

PART NO	H	PART NO	H
A	4.3	O	11
B	4.5	P	11.5
C	5	Q	12
D	5.5	R	12.5
E	6	S	13
F	6.5	T	13.5
G	7	U	14
H	7.5	V	15
I	8	W	16
J	8.5	X	17
K	9	Y	18
L	9.5	Z	19
M	10		15.5
N	10.5		16.5

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass(0.30t)	Plating silver	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	PA46	Black	—
②	Cover	—	1	SPCC	Plating Nickel	—
①	Keystoke	—	1	PA46	Black	—

DRAWN J.X.Zhong		DATE 2013/5/30		TITLE: TACT SWITCHES	
CHECKED				PART NO. K2-6639SP-00000-00	
APPROVALS				SCALE: 1:1	
TOLERANCES ARE		30~0.1 ±0.30 10~30 ±0.20 5~10 ±0.15 ~5 ±0.10		PROJ. SHEET 1 OF 1	
ECN NO.		REV.		DATE.	
NEW		CHANGE.		CHECK.	
DESCRIPTION.		APPRO.			