

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 10A

2.Torque Value : M2 , 1.77Lb.in

3.Wire Range : 26~16AWG

IEC Standard

1.Rated voltage/current : 130V / 10A

2.Torque Value : M2 , 0.2N.m

3.Wire Range : 0.5~1.0mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 3.5/3.81mm, Poles : N=02~24P

3.Stripping length : 4~5mm




4.Withstanding voltage : AC1250V/1Min

5.Operating temperature: -40°C~+105°C

6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over	To	Over	To	Over	Over	Over	Over	
6	10	10	24	30	60	100	150	0.1/10
TO	6	TO	10	TO	30	TO	60	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'


7.RoHS Compliance

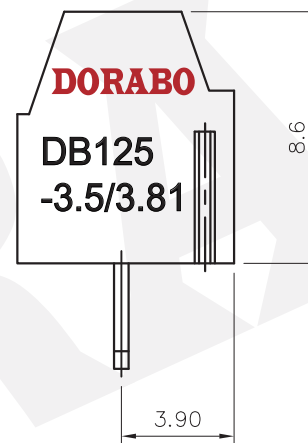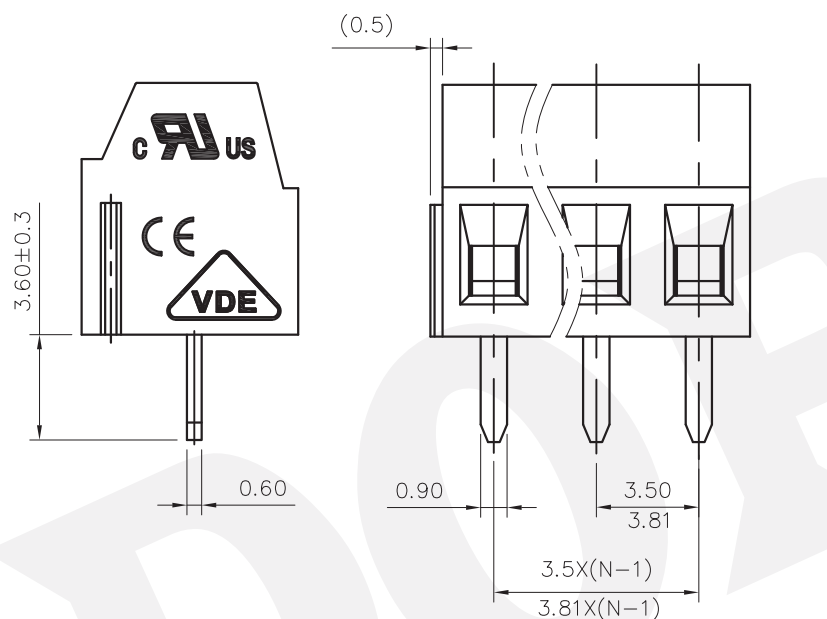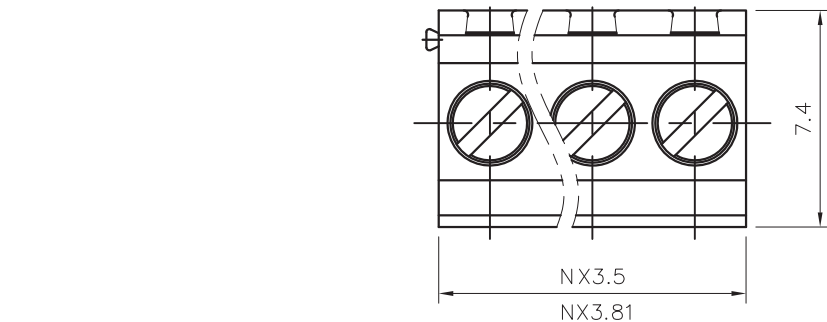

DB125 - 3.5/3.81 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

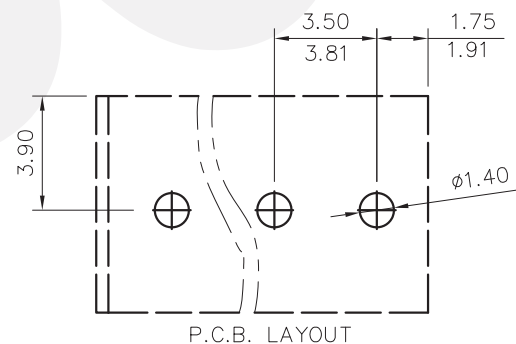

DETACHED LISTS	PART NO.:	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD			
	APPD:	NAME: DB125-3.5/3.81-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		MM (INCH)	SHEET	1/1

DO NOT SCALE DRAWING SCALE 1:1