
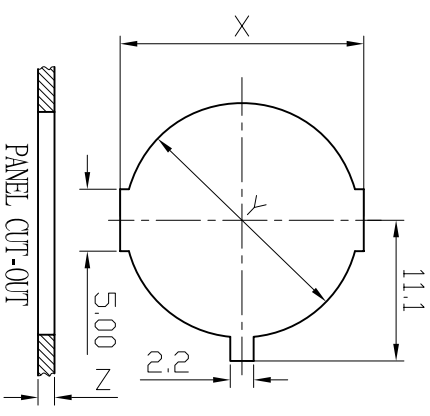
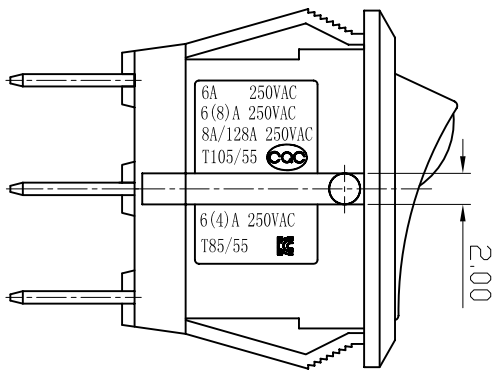


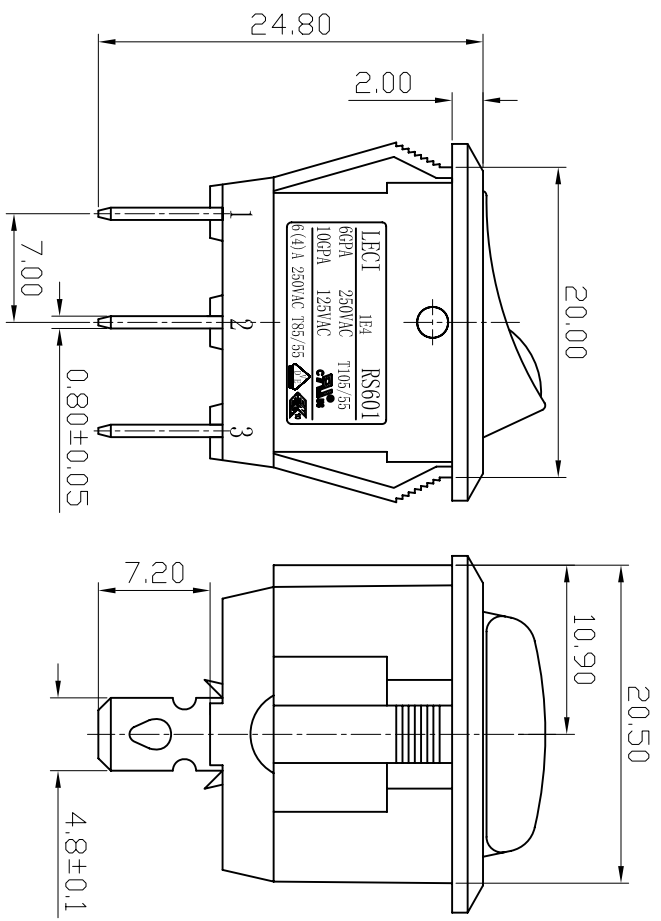

PANEL CUT-OUT			
Z	X	Y	
0.70~1.25	19.90~20.30	19.4~19.5	
1.25~2.00	20.40~20.70	19.4~19.5	
2.00~3.00	20.80~21.10	19.4~19.5	

NOTES:

1.Rating:

CQC 6A 250V AC T105/55

6(8)A 250VAC

8A/128A 250VAC

cUL 10GPA 250V AC

6GPA 125V AC T105/55

VDE ENEC 6(4)A 250V AC T85/55

KC 6(4)A 250V AC T85/55

2.Circuit Diagram:3P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:1500VAC 1min


Terminals to Button:3000VAC 1min

Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7. Insulation resistance:≥100MΩ

8.Body Material:NYLON 66 94V-0~2



A4			普通公差:		乐磁电子有限公司 LECI ELECTRONICS CO.,LTD						
A3			COMMON TOLERANCE:								
A2			UP TO 5	±0.20	单位	mm	投影	品名	跷板开关	比例	Free
A1			ABOVE 5 TO 30	±0.30	绘图	周金勇	核对	型号	RS601		
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	日期	2015.10.26	核准	图号			
				±5°			周培雷	DWG NO.	RS601C-101N011RB		