
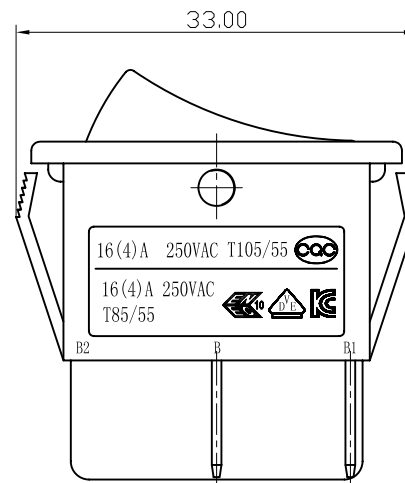
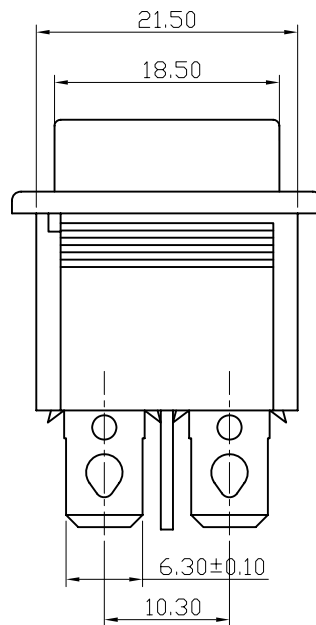
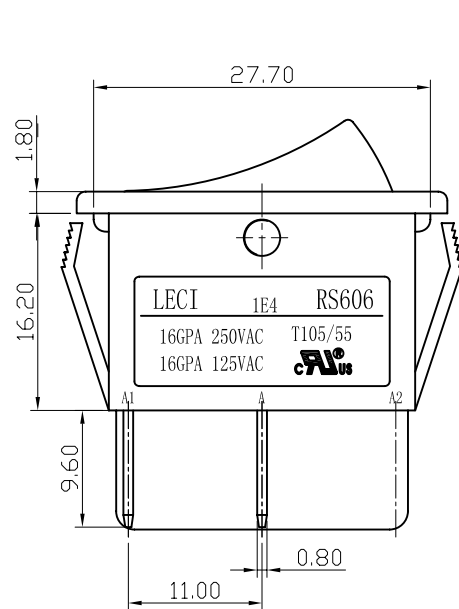



PANEL CUT-OUT

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	21.90~22.10	28.9~29.1
1.25~2.00	21.90~22.10	29.1~29.2
2.00~3.00	21.90~22.10	29.2~29.3

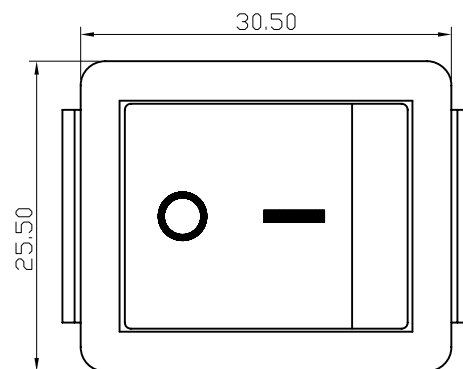

NOTES:

1.Rating:

VDE ENEC 16(4)A 250V AC T85/55

KC 16(4)A 250V AC T85/55

CQC 16(4)A 250V AC T105/55

UL cUL 16GPA 125V AC

16GPA 250V AC T105/55

2.Circuit Diagram:4P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min

Terminals to Button:3000VAC 1min

Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2

A4				普通公差：		LECI 乐磁电子有限公司							
A3				COMMON TOLERANCE：		LECI ELECTRONICS CO.,LTD							
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	跷板开关	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	周 金 勇	核 对	梁 金 勇	型 号	RS606		
				ABOVE 30	±0.50	DRAWN BY		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期	2015.06.17	核 准	周 培 雷	图 号	RS606-201N011CRB		
						DATE		APPROVAL BY		DWG NO.			