


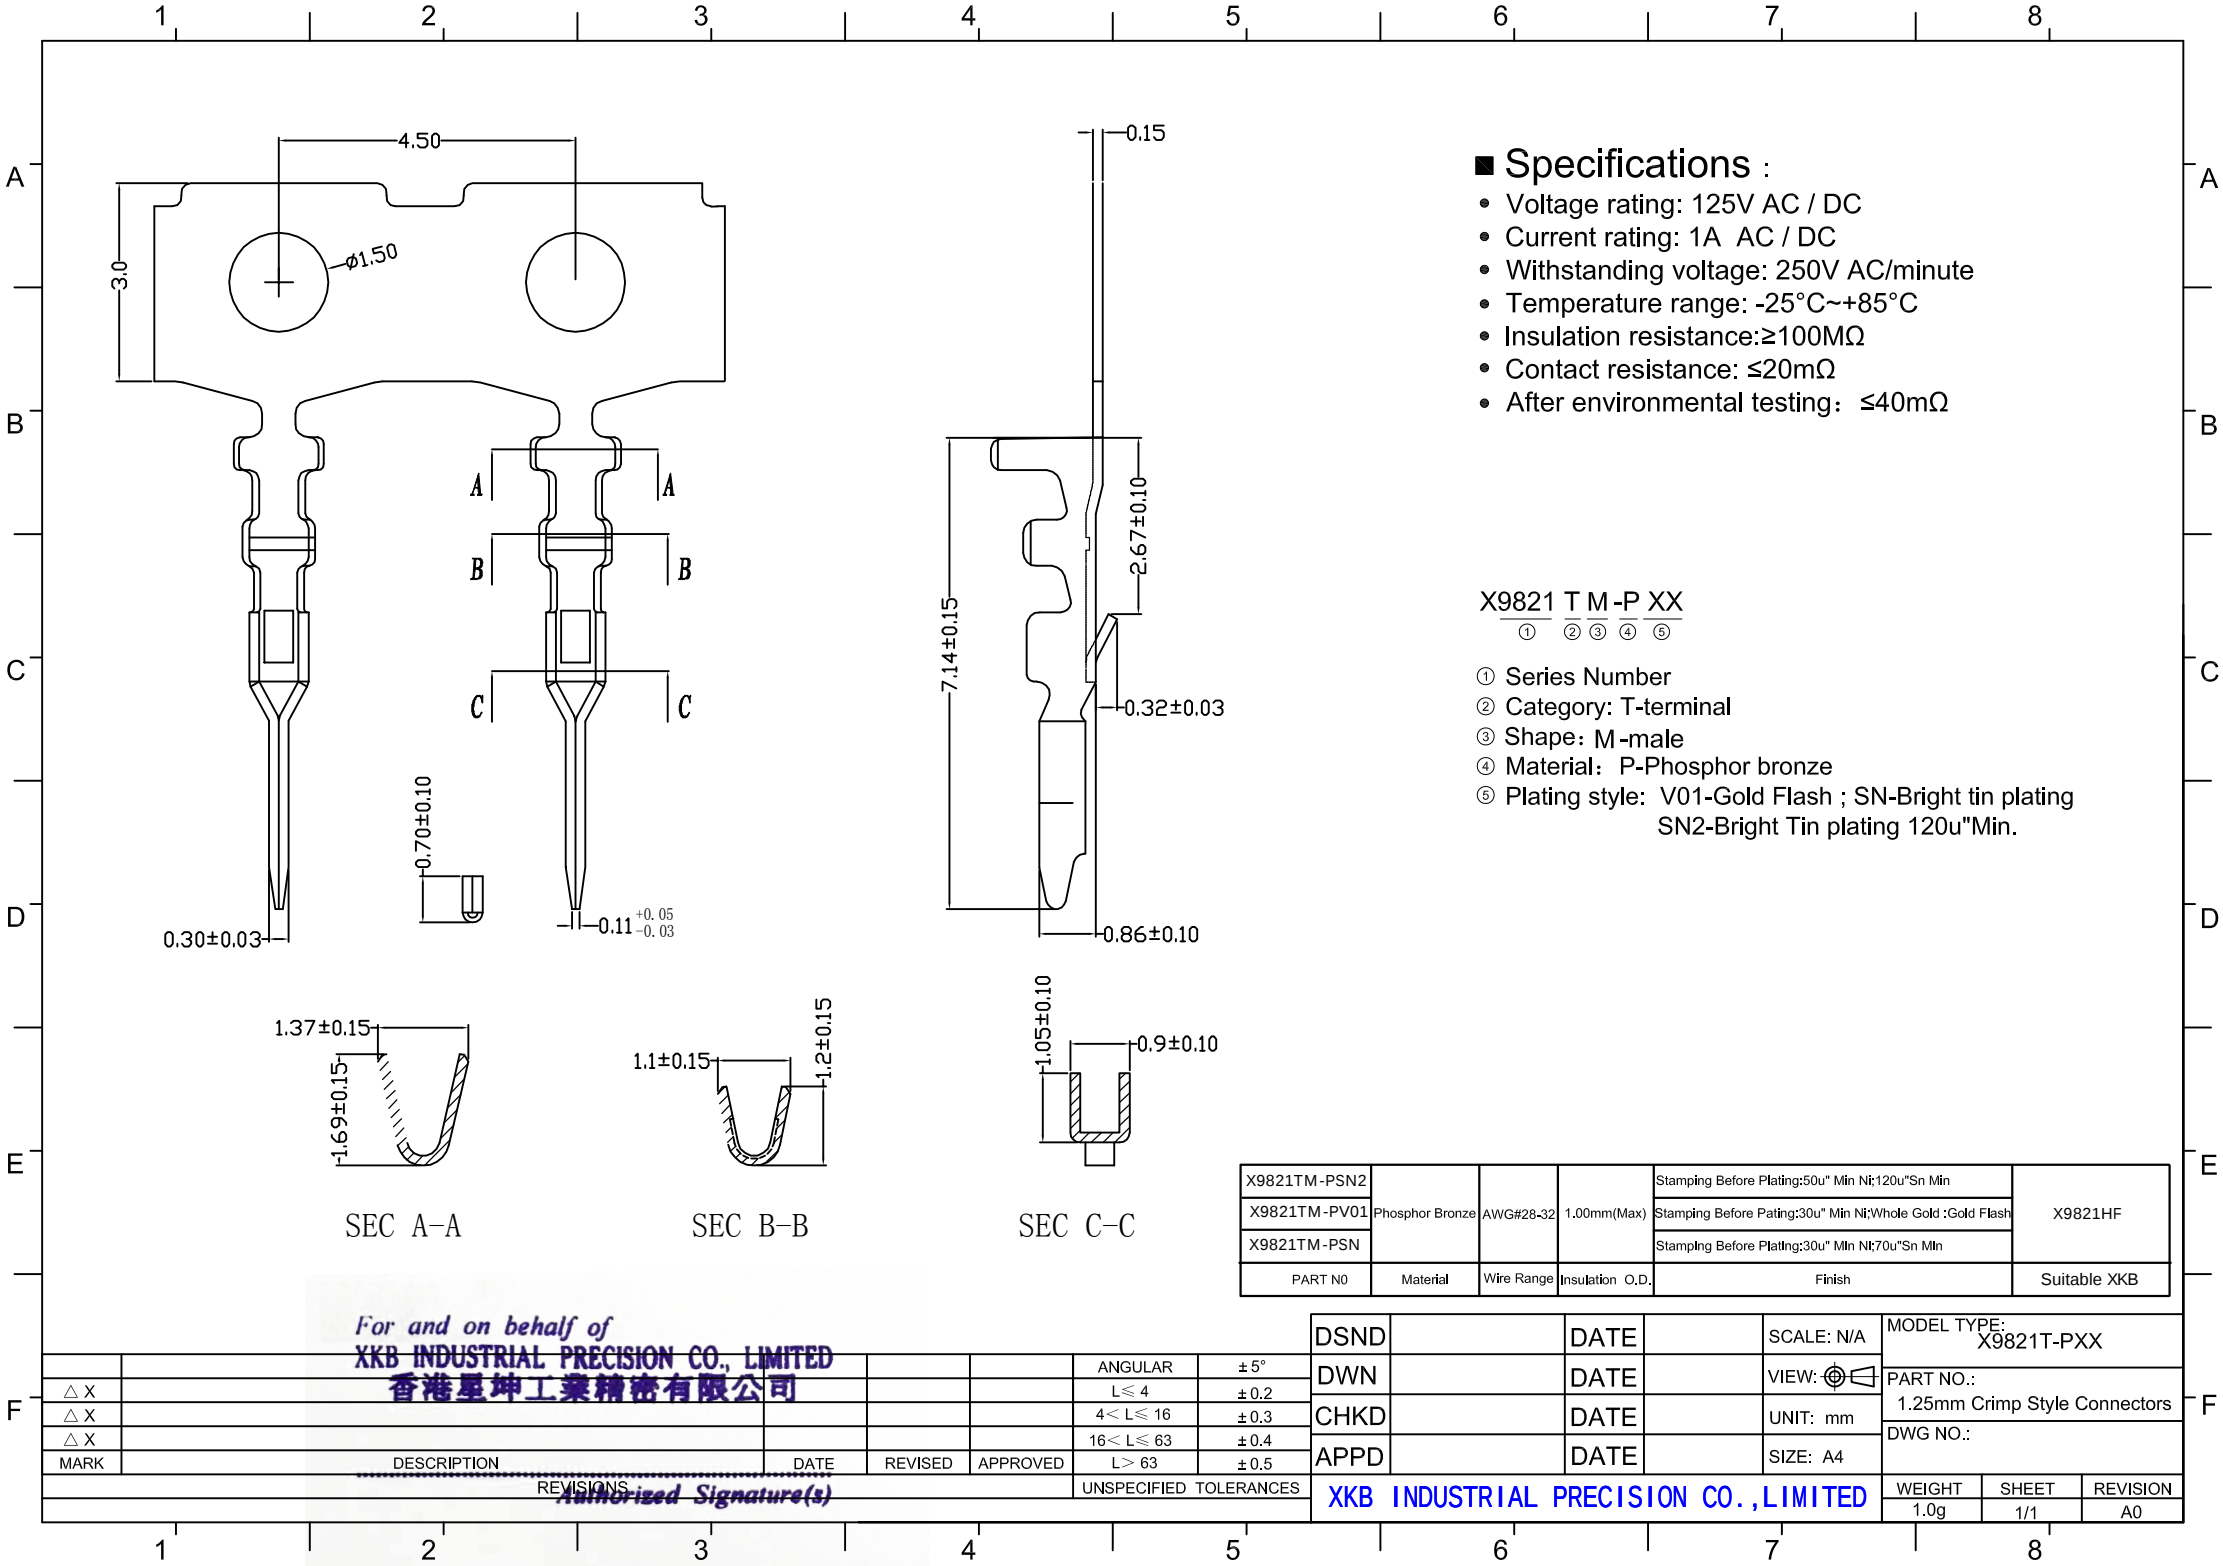

- Specifications :
- Voltage rating: 125V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 250V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: $\geq 100\text{M}\Omega$
 - Contact resistance: $\leq 20\text{m}\Omega$
 - After environmental testing: $\leq 40\text{m}\Omega$

X9821 T M -P XX
① ② ③ ④ ⑤

- ① Series Number
- ② Category: T-terminal
- ③ Shape: M-male
- ④ Material: P-Phosphor bronze
- ⑤ Plating style: V01-Gold Flash ; SN-Bright tin plating
SN2-Bright Tin plating 120u"Min.

X9821TM-PSN2				Stamping Before Plating:50u" Min Ni;120u"Sn Min	
X9821TM-PV01	Phosphor Bronze	AWG#28-32	1.00mm(Max)	Stamping Before Pating:30u" Min Ni;Whole Gold :Gold Flash	X9821HF
X9821TM-PSN				Stamping Before Plating:30u" Min Ni;70u"Sn Min	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB

DSND		DATE		SCALE: N/A	MODEL TYPE: X9821T-PXX
DWN		DATE		VIEW:	PART NO.: 1.25mm Crimp Style Connectors
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1
				REVISION A0	

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK					L > 63	± 0.5
REVISIONS						
UNSPECIFIED TOLERANCES						

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

Authorized Signature(s)