

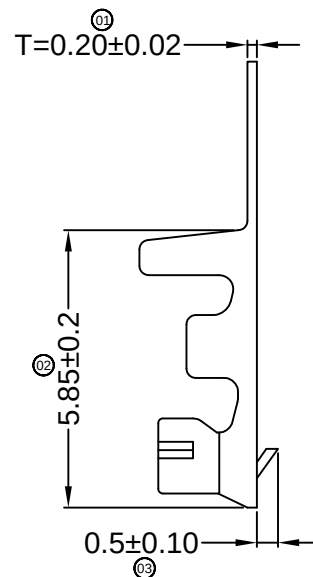
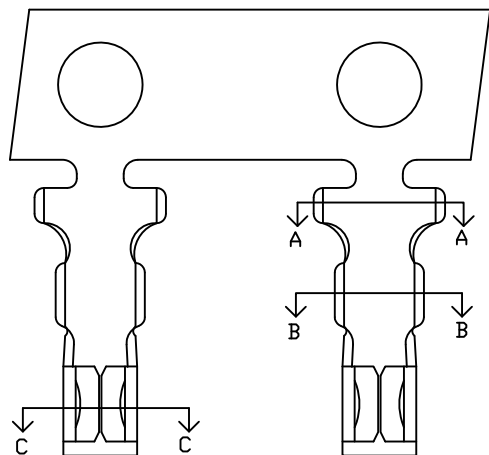


SECTION: A-A
SCALE: 1:1

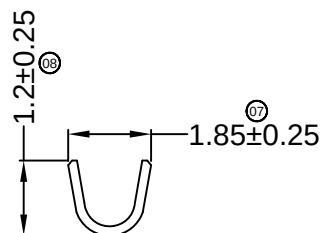

SECTION: B-B
SCALE: 1:1

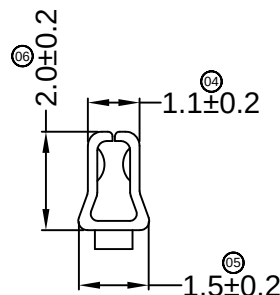

SECTION: C-C
SCALE: 1:1

Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

X2581 T X-P SN X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: T-Terminal
③ Appearance type: Blank-Ordinary
④ Material: P-Phosphor bronze ; B-Brass
⑤ Plating Style: G**-Gold Plated Contact
V**- All Gold-Plated
01-Gold Flash 02-2u" 03-3u"
05-5u" 10-10u" 15-15u"
SN-Bright Tin Plating (70u")
SN1-Bright Tin Plating (120u" Min).
0-No Plating Material
SW- Fog Tin Plating
⑥ Plating Method : Blank-Stamping before Plating
⑦ Mold No./Mark/Special No.

X2581T-PSN	Phosphor Bronze	AWG#22-30	1.90mm(Max)	Stamping Before Plating:30~50u" Ni;70~120u"Sn	X2581H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In XKB Housing

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	± 5°
△ X					L ≤ 4	± 0.2
△ X					4 < L ≤ 16	± 0.3
△ X					16 < L ≤ 63	± 0.4
MARK					L > 63	± 0.5
DESCRIPTION		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	

REVISIONS

Authorized Signature(s)

DSND		DATE		SCALE: N/A	MODEL TYPE: X2581T-PSN		
DWN		DATE		VIEW: 	PART NO.:		
CHKD		DATE		UNIT: mm	2.50 mm Crimp Style Connectors		
APPD		DATE		SIZE: A4	DWG NO.:		
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0