


Specifications :


- Voltage rating: 100V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

X2016 T X-P XXX X - X


- ① Series Number
② Category: T-terminal
③ Shape: Blank-ordinary
④ Material: P-Phosphor bronze
⑤ Plating style: V01-Gold Flash ; SN-Bright tin plating
⑥ Plating method: Blank-Stamping before plating
B-Plating before stamping
⑦ Mold No./Mark/Special No.

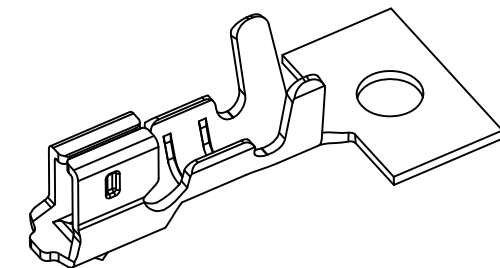


SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1



SECTION: C-C
SCALE: 1:1



X2016T-PV01				Stamping Before plating:30u" MIN. Ni; Whole Gold :Gold Flash	X2016H
X2016T-PSNB	Phosphor Bronze	AWG#24-30	1.50mm(Max)	Plating Before Stamping:10u" MIN. Ni ; 30u"Sn	
X2016T-PSN				Stamping Before plating:30u" MIN. Ni; 70u"Sn	
XPART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					ANGULAR ±5°
△ X					L ≤ 4 ±0.2
△ X					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5
REVISIONS					
Authorized Signature(s)					

DSND		DATE		SCALE: N/A	MODEL TYPE: X2016T-PXXXX
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	2.00 mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT 1.0g	SHEET 1/1
					REVISION A0