

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 20A
- 2.Torque value : M4 , 10.53Lb.in
- 3.Wire range : 22~12AWG

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.0mm, Poles : N=02~24P
- 3.Withstanding voltage : AC1600V/1Min
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

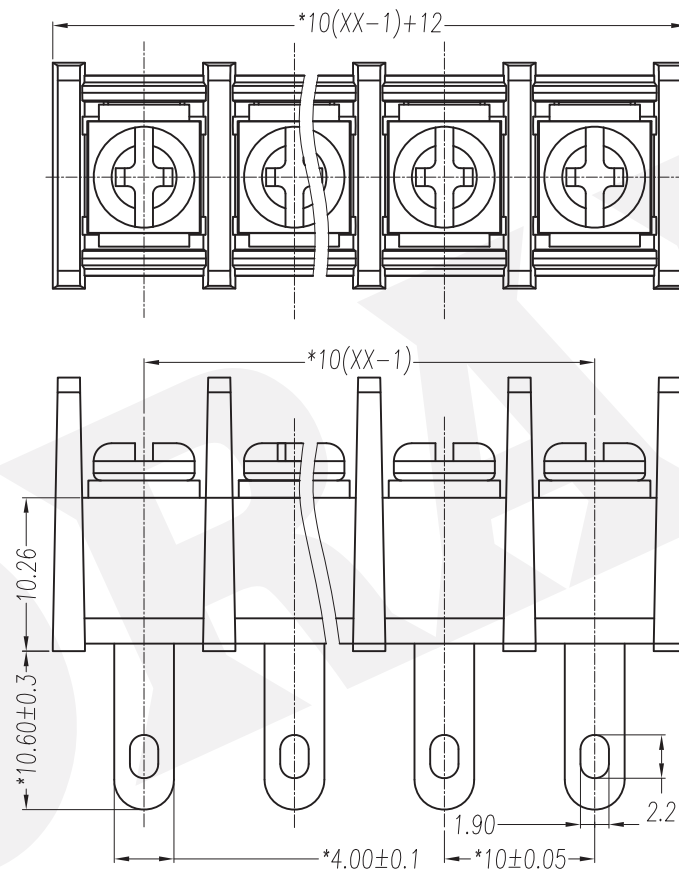
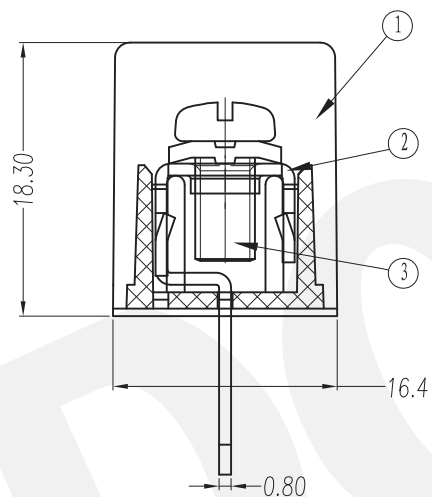
Pitch range in mm			Nominal dimension range in mm						0.1/10 ≤
TO	Over	TO	TO	Over	Over	Over	Over	150	
6	6	10	10	30	60	100	150	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*	

6.RoHS Compliance

DBT30H-10.0 - XXP - 1Y - 00A (H)

(Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

(RoHS)
00A-(Standard)

P.C.B. LAYOUT

DETACHED LISTS	PART NO.:	/	DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD		
	APPD:	/	NAME: DBT30H-10.0-XXP-1Y-00A(H)		
	CHKD:	/	TITLE: CUSTOMER DRAWING		
	DRFT:	/	DRAWING NO.: /		REV DO
	THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET 1/1 SCALE 1:1