

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 150V / 6A
- 2.Torque value : M1.6 , 1.29Lb.in
- 3.Wire range : 26~18AWG

IEC Standard




- 1.Rated voltage/current : 130V / 8A
- 2.Torque value : M1.6 , 0.15N·m
- 3.Wire range : 0.5~1.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 2.54mm, Poles : N=02-12P
- 3.Stripping length : 4~5mm
- 4.Withstanding voltage : AC1250V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	100 TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

7.RoHS Compliance

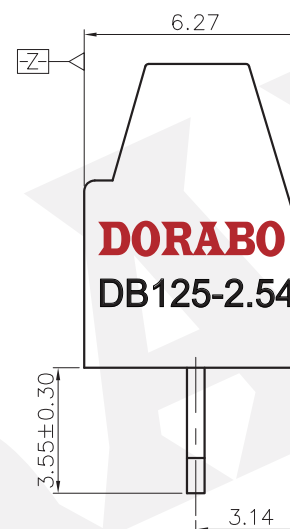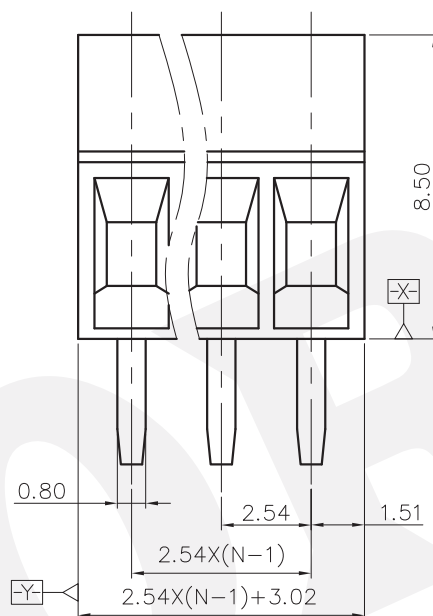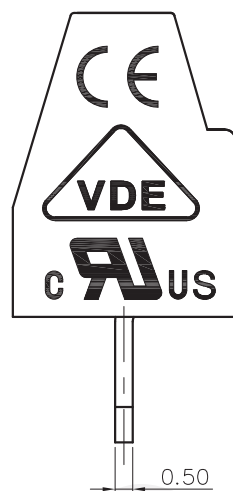

DB125 - 2.54 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange) 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS	PART NO.:	/				DORABO 慈溪市地博电子有限公司 CIXI DORABO ELECTRONICS CO.,LTD	
	APPD:					NAME: DB125-2.54-XXP-1Y-00A(H)	
	CHKD:					TITLE: CUSTOMER DRAWING	
	DRFT: YXX 2018/07/13					REV	DO
	THIRD ANGLE PROJECTION				DRAWING NO.:	SHEET	1/1

DO NOT SCALE DRAWING

SCALE 1:1