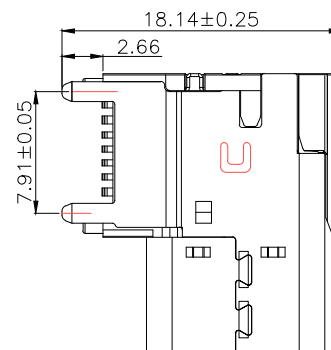
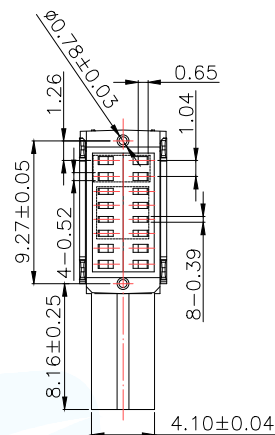
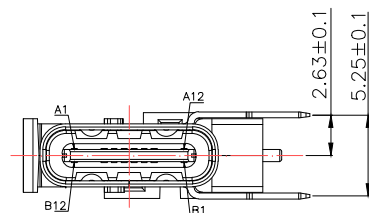
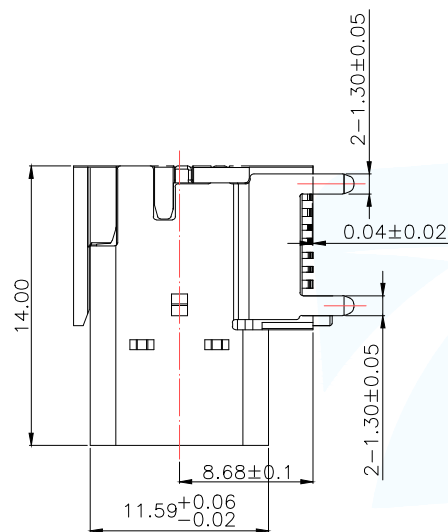



A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

characteristic:

- 1.Electrical performance: EICTRICAL
- 1.Rated current: 5.0A
- 2.Contact resistance: 40 MILLIOHMS MAX
- 3.Withstand voltage: 100V AC / 1 mA MAX
- 4.Insulation resistance: 150V DC/100 MEGA OHMS MIN

2.Mechanical properties:

- 1.Insertion force: 5~20N
- 2.Outgoing force: 8~20N
- 3.Service life: 10000 times, pull-out force 5N MIN
- 3.Material: MATERIAL
- 1.Plastic: LCP black UL94V-0
- 2.Terminal: C7025
- 3.Shell: SUS304
- 4.Card hook: SUS304

Four, electroplating: FINISH

- 1.Terminal: gold-plated contact point 30U"MIN
PIN pin welding area gold-plated G/F

- 2.Shell: nickel-plated 80U"MIN (salt spray 48H)

Five, electroplating products need to do tin sticking test: the sticking area reaches more than 95%.

- 6.SMT reflow soldering (peak 260°C±5°C) can not blistering or melting



Poor glue and discoloration (deformation is within tolerance)

- 7.Working temperature: -55°C~+85°C

- 8.Salt spray test: Pass 48H salt spray at a concentration of 5±1% salt water

Test without rust


MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd			
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:USB TYPE CF 16PIN 侧插SMT 胶壳LCP黑色 端子镀金30U" CH=6.70		
			PAR	TYPEC-305-ACP16	
DECIMALS:	ANGLES:		DWN	KING	
.X:±0.30	X':.±10°		CHKD	2018.09.07	
.XX:±0.20	.X':.±8°		APVD		
.XXX:±0.10	.XX":.±5°	SCALE1:1	UNIT:MM		
		CUSTOMER COPY	SIZE:A4	SHEET:1F1	REV:A

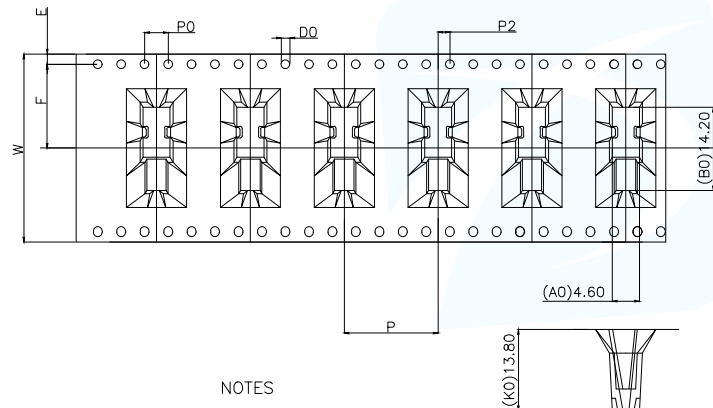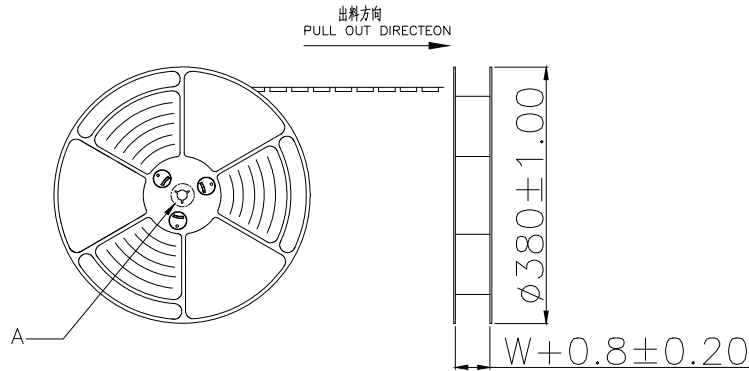

NOTES






1. 带子引导长度

LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

2. 上带 剥力为: 0.1~1.3N(10.2GF~130GF)

PEELING OFF FORCE OF TOP TAPE: 0.1~1.3N(10.2GF~130GF)

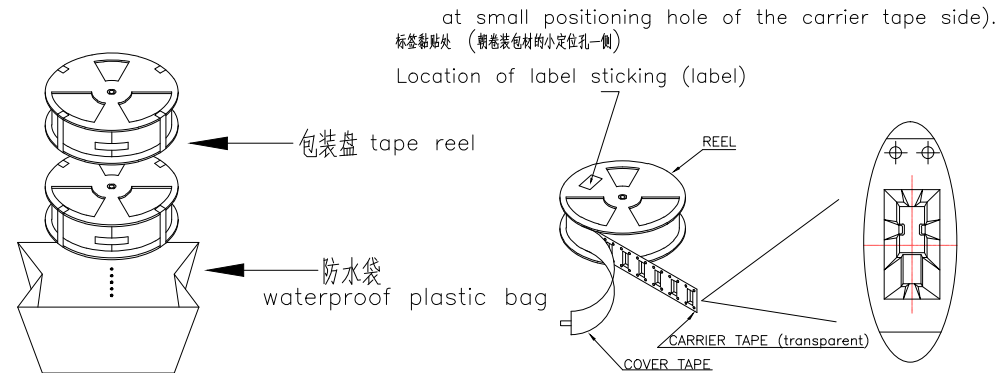出货'运输过程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
卷带在运输过程中不能散开PEELING OFF SHOULD NOT BE ALLOWED DURING
TRANSPORTATIONDETAIL:A
10:1

纸箱 carton

330mmX330mmX300mm

NOTE:

1. 每卷包装数量及每箱装箱数量如左下表格。

PACKING Q'TY OF EACH REEL & CARTON AS
BELOW
TABLE SHOWN.

2. 将装满产品的卷盘放入纸箱并以胶带封口

PUT REELS IN THE CARTON AND USE
ADHESIVE TAPE TO SEAL UP.

W	32±0.3
F	14.2±0.1
S0	±0.1
T	0.50±0.1
E	1.75±0.1
P	16.0±0.1
P0	4±0.1
P2	2±0.15
AO	4.60±0.1
BO	14.2±0.1
KO	13.8±0.1
DO	1.50±0.1

卷带	规格: $\phi 330\text{mm}$	包装数量: 400PCS
纸箱	规格: 330mmX330mmX300mm	包装数量: 8盘/3200PCS

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES		 TITLE: USB TYPE CF 16PIN 侧插SMT 胶芯LCP黑色 端子镀金30U" CH=6.70		
DECIMALS:		PAR	TYPEC-305-ACP16	
ANGLES:		DWN	KING	2018.09.07
.X:±0.30	X":±10°	CHKD		
.XX:±0.20	X":±8°	APVD		
.XXX:±0.10	.XX":±5°	SCALE 1:1	UNIT: MM	
CUSTOMER COPY		SIZE: A4	SHEET: 1F1	REV: A