
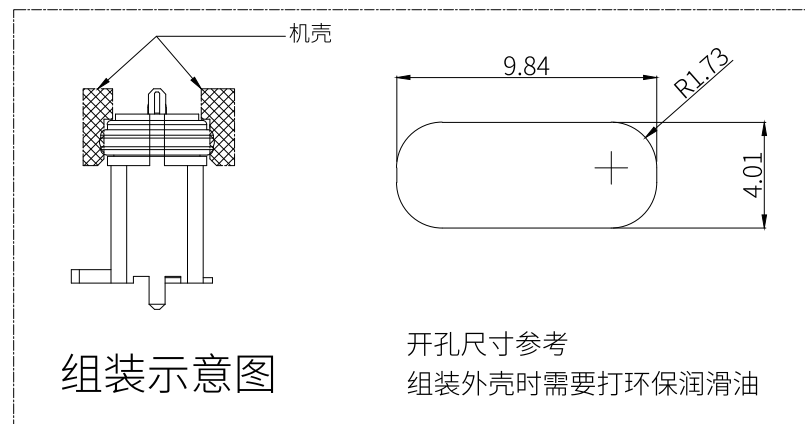
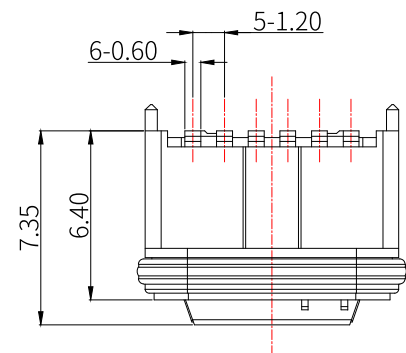

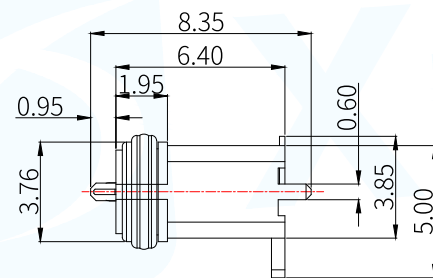


A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME


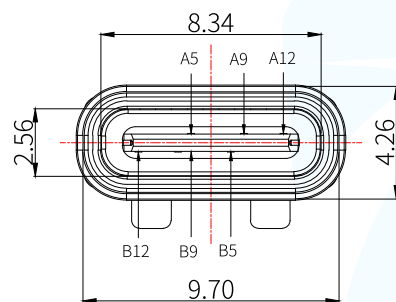


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1.1. RATING: 3A;
- 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
- 1.3. DIELECTRIC WITHSTANDING: 100V AC MIN.;
- 1.4. INSULATION RESISTANCE: 100MΩ MIN.;
2. DURABILITY: 5,000 CYCLES MIN.;
3. INSERTION FORCE: 5-20N;
4. EXTRACTION FORCE: 6-20N;
5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.
6. PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

NO.	NAME	Q'TY	FINISH
1	HOUSING	1	PA10T(G.F30%)
2	CONTACT	2	PHOSPHOR BRONZE AU/Ni PLATING T=0.20MM
3	SHELL	3	NI PLATING

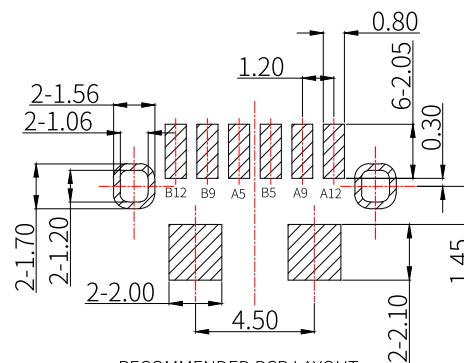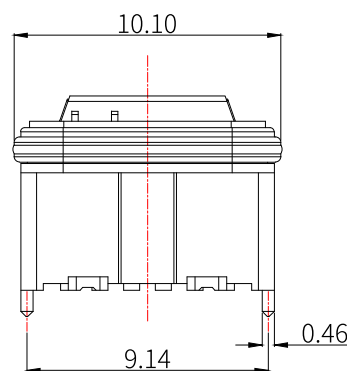

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: TYPE C 6PIN 防水母座 立式SMT TYPE	
			PAR	TYPEC-243-ARP6X7
			DWN	YAO
			CHKD	2014.07.07
DECIMALS:	ANGLES:		APVD	
X:±0.5	X°:±2°		SCALE 1:1	UNIT: mm
X.X:±0.3	.X°:±1°		SIZE:A4	UNIT: mm
X.XX:±0.1	.XX°:±0.5°		SHEET:1F1	REV:A
CUSTOMER COPY				