
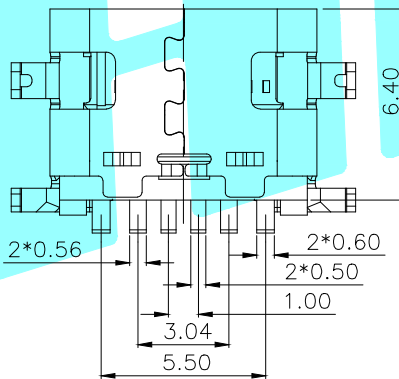
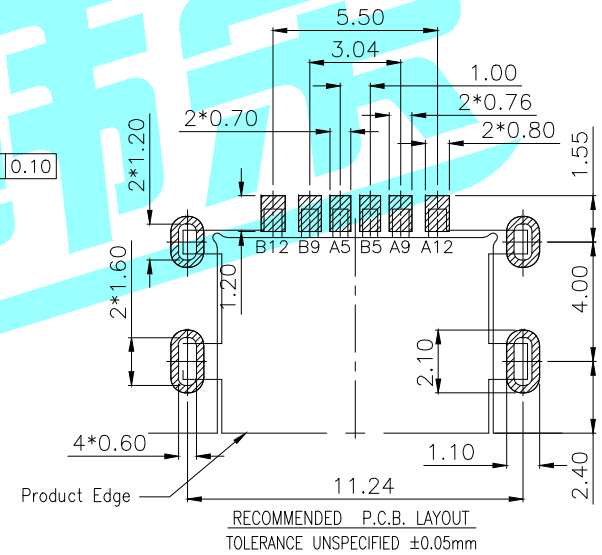

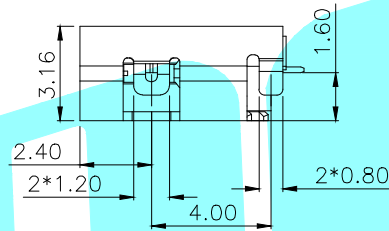


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

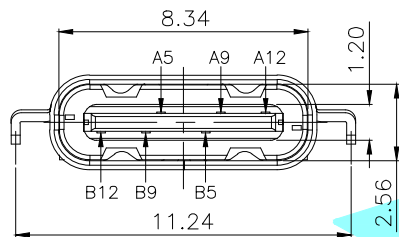

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

③	Shell	——	1	SUS	Ni Plated	
②	Contact	——	6	COPPER ALLOY	Au Plated	
①	Housing	——	1	HIGH TEMPERATURE PLASTIC	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	
APPROVALS			DATE	HRC® ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2020/11/2				
CHECKED				TITLE:	USB CONNECTOR	
APPROVALS				PART NO.	TYPE-C-31-M-28	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
			±2'	DRAWING NO.	———	SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.