

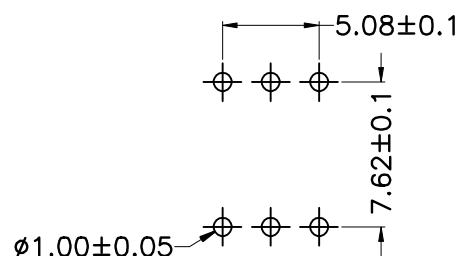
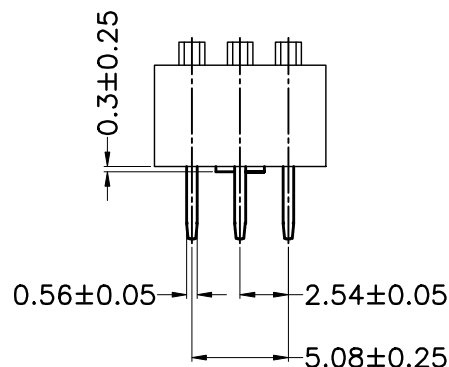
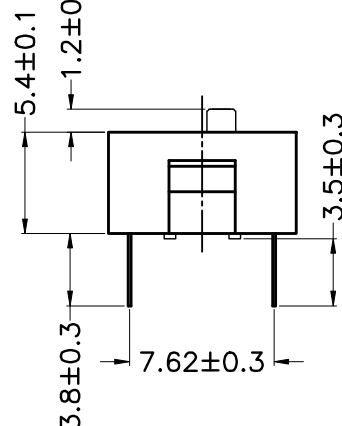



PRODUCT NO.	1	2	3	4	5	6
DSWB03LHGETB	RoHS compliant				REV.	ECN NO.
					DR	DATE



PCB Layout

SCHEMATIC(TYP.)



注意:

1. 波峰焊: 推荐焊锡温度在270℃±5℃, 浸锡时间为5~6秒钟。
2. 手工焊: 使用30瓦烙铁控制温度在320℃, 焊接时间大约2~3秒钟。
3. 拔柄位置: 产品焊接时, 请将产品的拔柄置于OFF端, 能给予产品更好的接触性能。
4. 清洗过程: 清洗使用超音波方式, 能给予更好的效果。

Note:

1. All dimensions are in millimeters.

2. General tolerance: ±0.2mm.

3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).

Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).

Actuators: UL94V-0 PBT Thermoplastic (White).

Contact plating: Gold plating over nickel.

Pitting material: Epoxy.

4. Electrical

Electrical: 2000 Operations per switch 24/VDC, 25mA.

Non-Switching Rating: 100mA, 50/VDC.

Switching Rating: 25mA, 24/VDC

Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.

Stroke: 2.0mm.

Operation Temp: -20℃ to 70℃.

Storage Temp: -40℃ to 85℃.

6. PART NUMBER DESCRIPTION:

DS WB 03 L H G E T B

[Packing: T=Tube R=Reel]

[Finish: E=1 μ"-3 μ" Gold-plated F=10 μ" Gold-plated]

[Finish: G=Full Gold S=Contact-Gold-plated, Terminal-Tin-Plated]

[Terminal: S=SMD type H=Straight.....]

[Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]

[HP=Half-Pitch IC=IC type PV=Piano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		 东莞市广誉实业有限公司 DongGuan Kingtek Industrial Co., Ltd.			
LINER	ANGLES	PROJECTION					
.0 ± 0.30	0. ± 1°			TITLE			
.00 ± 0.20	.0 ± 0.5°			BY DSWB SERIES PITCH 2.54mm			
.000± 0.10	.00±			PRODUCT FAMILY DSWB SERIES			
DESIGN	LU ER XIN	2013/07/02	PRAT NO.	DSWB03LHGETB			
DRAWING			FILE NO.	DSWB03LHGETB-A			
CHECK			SIZE	UNIT	SCALE	SHEET	REV.
APPRO.			A4	mm	FIT	1 OF 1	A