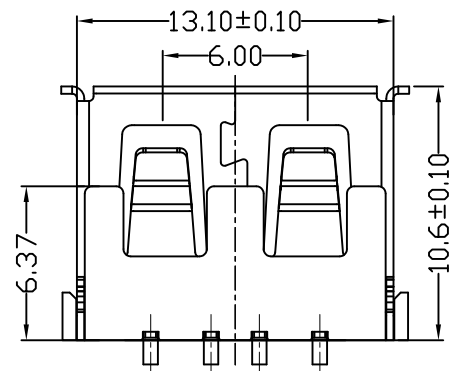
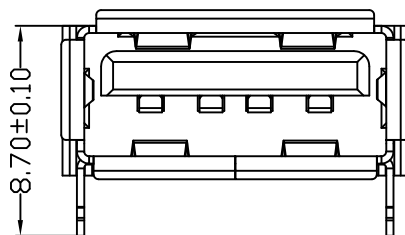
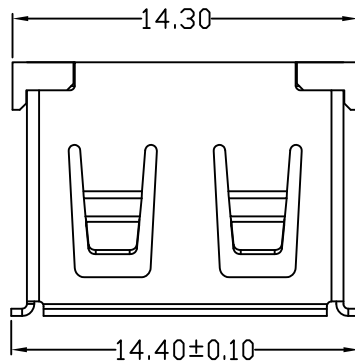


NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:


- 1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

- 01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

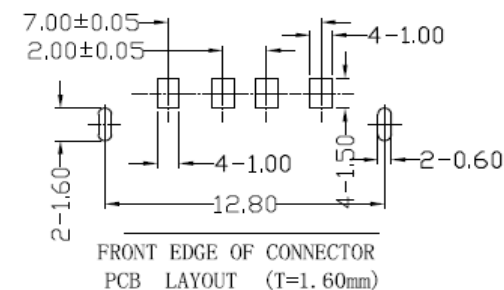

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位	MM	制图	Z-Y-B	制图料号	JTJ-USB-10.6-001
UNITS	MM	DRAWING		PRODUCT PART NO.	
比例	1:1	审核		产品名称	USB A/F 10.6有边后两脚鱼叉(方弹)
SCALE		CHKD		PRODUCT NO.	
日期	2012.09.24	核准		角法	
DATE		APPD		VIEW	

单位

MM

制图

Z-Y-B

制图料号

JTJ-USB-10.6-001

比例

1:1

审核

产品名称

USB A/F 10.6有边后两脚鱼叉(方弹)

日期

2012.09.24

核准

角法

VIEW

版本

AD