

# **SHARP**

## SYSTEM DEVICE UNIT ELECTRONIC COMPONENTS AND DEVICES DIVISION SHARP CORPORATION

# **SPECIFICATION**

DEVICE SPECIFICATION	FOR	
PH MODEL No.	HOTOCOUPLER	
	PC817	
	Business dealing name  PC817XNCSP9F  PC817X1CSP9F  PC817X2CSP9F  PC817X3CSP9F  PC817X4CSP9F	
Specified for		
Enclosed please find copies of the Spec This specification sheets and attached s After confirmation of the contents, plea with approving signature on each.	heets shall be both side cop	oy.
CUSTOMER'S APPROVAL		PRESENTED
DATE		DATE Sep. QX, 20/X
BY		ву
		T. Ichinose, Department General Manager of Development Dept. II

System Device Unit

**SHARP CORPORATION** 

Electronic Components and Devices Division

# REFERENCE

Product name: PHOTOCOUPLER

Model No.: PC817

Business dealing name

PC817XNCSP9F
PC817X1CSP9F
PC817X2CSP9F
PC817X3CSP9F
PC817X4CSP9F

- 1. These specification sheets include materials protected under copyright of Sharp Corporation ("Sharp"). Please do not reproduce or cause anyone to reproduce them without Sharp's consent.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets, as well as the precautions mentioned below. Sharp assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets, and the precautions mentioned below.

### (Precautions)

- (1) Please do verify the validity of this part after assembling it in customer's products, when customer wants to make catalogue and instruction manual based on the specification sheet of this part.
- (2) This product is designed for use in the following application areas;
  - · OA equipment Audio visual equipment · Home appliances
  - · Telecommunication equipment (Terminal) · Measuring equipment
  - · Tooling machines · Computers
  - If the use of the product in the above application areas is for equipment listed in paragraphs (3) or (4), please be sure to observe the precautions given in those respective paragraphs.
- (3) Appropriate measures, such as fail-safe design and redundant design considering the safety design of the overall system and equipment, should be taken to ensure reliability and safety when this product is used for equipment which demands high reliability and safety in function and precision, such as;
  - · Transportation control and safety equipment (aircraft, train, automobile etc.)
  - Traffic signals Gas leakage sensor breakers Rescue and security equipment
  - · Other safety equipment
- (4) Please do not use this product for equipment which require extremely high reliability and safety in function and precision, such as;
  - · Space equipment · Telecommunication equipment (for trunk lines)
  - · Nuclear power control equipment · Medical equipment
  - · Power generation and power transmission control system (Key system)
- (5) Please contact and consult with a Sharp sales representative if there are any questions regarding interpretation of the above four paragraphs.
- Please contact and consult with a Sharp sales representative for any questions about this product.
- 4. Warranty term and warranty limits

#### Warranty term

The warranty term for the shipped product shall be for 1 year after shipping to the designated place by the ordered customer.

#### (Warranty limits)

- SHARP supplies the replacement when this SHARP product shall be failed by SHARP's responsibility during above warranty term. However, this warranty is excluded in case of the following.
- (1)In case of improper handling and using by the customer.
- (2) In case of that the cause of the failure is caused by the reason other than this SHARP product.
- (3) In case of modification and repairing by person other than SHARP responsibility is not for SHARP.
- (4) In case of a calamity, a disaster and such as the case when that responsibility is not for SHARP.

This warranty herein means the warranty for this SHARP product itself, SHARP takes no responsibility for any damage caused by the failure of this SHARP product.



1. Application

This specification applies to the outline and characteristics of photocoupler Model No. PC817. (Lead free and Halogen free type).

2. Outline Refer to the attached sheet, page 4.

3. Ratings and characteristics Refer to the attached sheet, page 5, 6.

4. Reliability Refer to the attached sheet, page 7.

5. Outgoing inspection Refer to the attached sheet, page 8.

#### 6. Supplement

6.1 Isolation voltage shall be measured in the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The dielectric withstanding tester with zero-cross circuit shall be used.
- (3) The wave form of applied voltage shall be a sine wave.

  (It is recommended that the isolation voltage be measured in insulation oil.)
- 6.2 Package specifications Refer to the attached sheet, page 9 to 11.

6.3 Collector current (Ic) Delivery rank table ("O" mark indicates business dealing name of ordered product)

Rank at delivery	Business dealing name	Rank mark	Ic (mA)	
	PC817XNCSP9F	with or without	2.5 to 30	
	PC817X1CSP9F	A	4.0 to 8.0	
PC817X2CSP9F		В	6.5 to 13	
	PC817X3CSP9F		10 to 20	
PC817X4CSP9F		D	15 to 30	

Test conditions
$I_{F}\!\!=\!\!5mA$ $V_{CE}\!\!=\!\!5V$ $Ta\!\!=\!\!25^{\circ}\!C$

6.4 This Model is approved by UL.

Approved Model No.: PC817

UL file No.: E64380

6.5 This Model is approved by CQC.

Approved Model No.: PC817

6.6 This product is not designed against irradiation.

This product is assembled with electrical input and output.

This product incorporates non-coherent light emitting diode.

#### 6.7 ODS materials

This product shall not contain the following materials.

Also, the following materials shall not be used in the production process for this product.

Materials for ODS: CFC<sub>S</sub>, Halon, Carbon tetrachloride, 1.1.1-Trichloroethane (Methyl chloroform)

6.8 Specified brominated flame retardants

Specified brominated flame retardants (PBB and PBDE) are not used in this device at all.



### 6.9 Compliance with each regulation

(1) The RoHS directive (2002/95/EC)

This product complies with the RoHS directive (2002/95/EC).

Object substances: mercury, lead, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE)

(2) Content of six substances specified in Management Methods for Control of Pollution Caused by Electronic Information

Products Regulation (Chinese: 电子信息产品污染控制管理办法).

	Toxic and hazardous substances					
Category	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent chromium (Cr <sup>6+</sup> )	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
Photocoupler	1	1	1	1	1	<b>√</b>

 $<sup>\</sup>checkmark$ : indicates that the content of the toxic and hazardous substance in all the homogeneous materials of the part is below the concentration limit requirement as described in SJ/T 11363-2006 standard.

(3) This product complies with "Halogen free".

"Halogen free" about this product is defined as follows.


The concentration ratio of Chlorinate and Bromine in raw material and indirect material, finished product can not exceed 900 ppm, the total concentration of the 2 substance should not exceed 1500 ppm.

7. Notes

Precautions for photocouplers : Attachment-1

# REPOSITX TESTS E

## 2. Outline

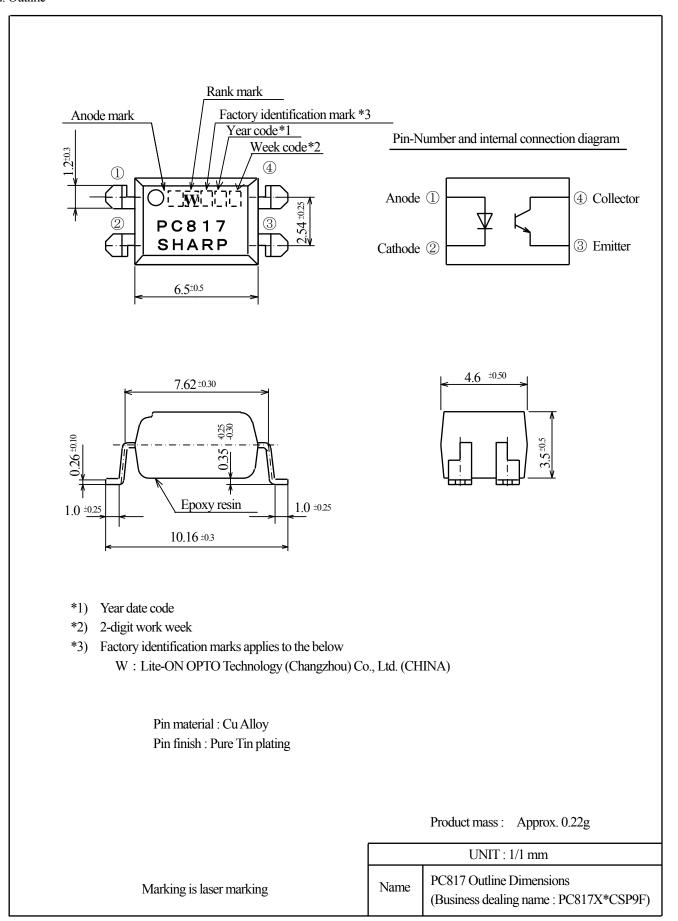



## 3. Ratings and characteristics

## 3.1 Absolute maximum ratings

 $Ta=25^{\circ}C$ 

Parameter		Symbol	Rating	Unit
	*1 Forward current	$I_{\mathrm{F}}$	50	mA
Immust	Peak forward current	${ m I}_{ m FM}$	1	A
Input	Reverse voltage	$V_R$	6	V
	Power dissipation	P	70	mW
	Collector-emitter voltage	$V_{CEO}$	80	V
Outrout	Emitter-collector voltage	$V_{ECO}$	6	V
Output	Collector current	$I_c$	50	mA
	*1 Collector power dissipation	P <sub>c</sub>	150	mW
	Total power dissipation	P <sub>tot</sub>	200	mW
	Operating temperature	$T_{opr}$	-30 to +100	$^{\circ}\! \mathbb{C}$
	Storage temperature	$T_{ m stg}$	-55 to +125	$^{\circ}$ C
	*2 Isolation voltage	V <sub>iso(rms)</sub>	5	kV
	*3 Soldering temperature	$T_{sol}$	270	$^{\circ}$ C

<sup>\*1</sup> The derating factors of absolute maximum ratings due to ambient temperature are shown in Fig. 1 to 2.

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.
- \*3 For 10s

## 3.2 Electro-optical characteristics


Ta=25°C


Parameter		Symbol	Condition	MIN.	TYP.	MAX.	Unit
	Forward voltage	rd voltage $V_F$ $I_F$ =20mA		-	1.2	1.4	V
Innut	Peak forward voltage	$V_{FM}$ $I_{FM}$ =0.5A		1	1	3.0	V
Input	Reverse current	$I_R$	$V_R=4V$	ı	1	10	$\mu$ A
	Terminal capacitance	$C_{t}$	V=0, f=1kHz	-	30	250	pF
	Dark current	$I_{CEO}$	$V_{CE}$ =50V, $I_{F}$ =0	1	1	100	nA
Output	Collector-emitter breakdown voltage	BV <sub>CEO</sub>	$I_c=0.1 \text{mA}$ $I_F=0$	80	1	-	V
	Emitter-collector breakdown voltage	BV <sub>ECO</sub>	$I_{E}=10 \muA, I_{F}=0$	6	1	-	V
	Collector current	$I_c$	I –5m A V –5V	2.5	ı	30	mA
	*4 Current Transfer Ratio	CTR	$I_F=5mA, V_{CE}=5V$	50	1	600	%
	Collector-emitter saturation voltage	$V_{\text{CE(sat)}}$	$I_F=20mA$ $I_c=1mA$	-	0.1	0.2	V
Transfer	Isolation resistance	R <sub>ISO</sub>	DC500V 40 to 60%RH	$5 \times 10^{10}$	10 <sup>11</sup>	-	Ω
charac-	Floating capacitance	$C_{\rm f}$	V=0, f=1MHz	ı	0.6	1.0	pF
teristics	Cut-off frequency	$f_c$	$V_{CE}$ =5V, $I_c$ =2mA $R_L$ =100 $\Omega$ , -3dB	1	80	-	kHz
	Rise time	tr	V <sub>CE</sub> =2V I <sub>c</sub> =2mA	-	4	18	$\mu$ s
	Fall time	$t_{\rm f}$	$R_L=100\Omega$	-	3	18	$\mu$ s

<sup>\*4</sup> CTR (%) =  $(I_c/I_F) \times 100$ 

<sup>\*2</sup> AC For 1 min , 40 to 60%RH

# REFERENCE



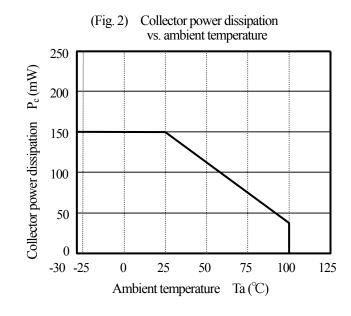



## 4. Reliability

The reliability of products shall satisfy items listed below.

## Test item as require

st term as require	·	
Test title	Test condition	
Pre-condition test	125°C=24h, 85°C 85%RH=168h, and IR reflow 260°C peak=3 cycles	
Temperature cycling test	Ta=-55∼125°C, Dwell time=15min per zone, 1000 cycles	
Room temperature operation life test	Ta=25°C, I <sub>F</sub> =50mA, 1000h	
High temperature operation life test	Ta=110°C, I <sub>F</sub> =20mA, I <sub>C</sub> =30mA, 1000h	
High temperature & high humidity bias test	Ta=85°C, 85%RH, V <sub>CE</sub> =64V, 1000h	
High temperature bias test	Ta=110°C, V <sub>CE</sub> =80V, 1000h	
High temperature storage test	Ta=150°C, 1000h	
Low temperature storage test	Ta=-55°C, 1000h	
Autoclave	Temperature=121°C, 100%RH and 15Psi, 168h	

## Spec limit of product

Ta=25°C

Parameter	Symbol	Mesurement condition	MIN.	MAX.	Unit
Forward voltage	$V_{\rm F}$	I <sub>F</sub> =20mA	-	1.4	V
Reverse current	$I_R$	$V_R=4V$	-	10	μΑ
Dark current	I <sub>CEO</sub>	V <sub>CE</sub> =50V	-	100	nA
Collector-emitter breakdown voltage	BV <sub>CEO</sub>	I <sub>C</sub> =0.1mA	80	-	V
Emitter-collector breakdown voltage	BV <sub>ECO</sub>	I <sub>E</sub> =10 μ A	6		V
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>F</sub> =20mA,I <sub>C</sub> =1mA	-	0.2	V
Current Transfer Ratio	CTR	I <sub>F</sub> =5mA,V <sub>CE</sub> =5V	50	600	%

## Reliability criteria

- 1. Reading value for each step test not over 50% Delta for  $V_{\text{F}}, BV_{\text{CEO}}, BV_{\text{ECO}}$  and  $I_{\text{C}}$  parameter.
- 2. Reading value for each step test not over spec limit for  $I_R, I_{\text{CEO}}$  and  $V_{\text{CE(sat)}}$  parameter.
- 3. Short and open is criteria of Temperature cycling test and Autoclave test item.



# 5. Outgoing inspection

## 5.1 Inspection items

(1) Appearance

## 5.2 Sampling method and Inspection level

A single sampling plan, normal inspection level II based on ISO 2859 is applied.

The AQL according to the inspection items are shown below.

Defect	Inspection item	AQL(%)
Major defect	Unreadable marking	0.15
Minor defect	Appearance defect except the above mentioned.	0.65


# REFORT RESPECT

# 6.2 Packing specification

# 6.2.1 Package materials

Name	Materials	
Reel	PS	
Packing case (Inner box)	Donor	
Packing case (Outer carton)	Paper	


## 6.2.2 Carrier tape structure and dimensions

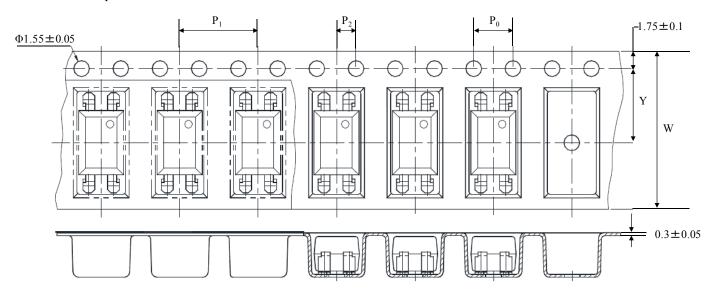

• Dimensions list (Unit: mm)

W	$P_0$	$P_1$	P <sub>2</sub>	Y
16.0±0.3	4.0±0.1	12±0.1	2.0±0.1	7.5±0.1


## 6.2.3 Reel structure and dimensions

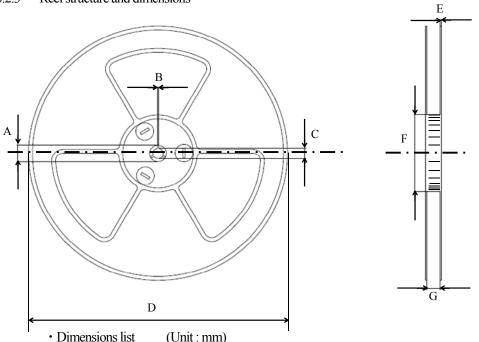


-	Difficilisions not	(01111.11111)					
	A	В	С	D	Е	F	G
	21.0±0.8	$2.0 \pm 0.5$	13.0 +0.5 -0.2	$\phi 330.0 \pm 2.0$	1.8 +0.2 -0	$100.0 \pm 0.5$	16.4 +0.2 -0

# REFERENCE

# 6.2.4 Direction of product insertion

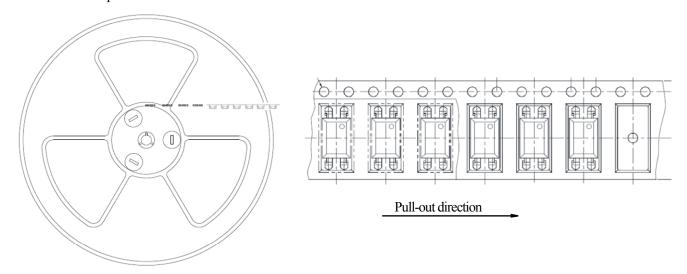

# 6.2.5 Outer packing appearance

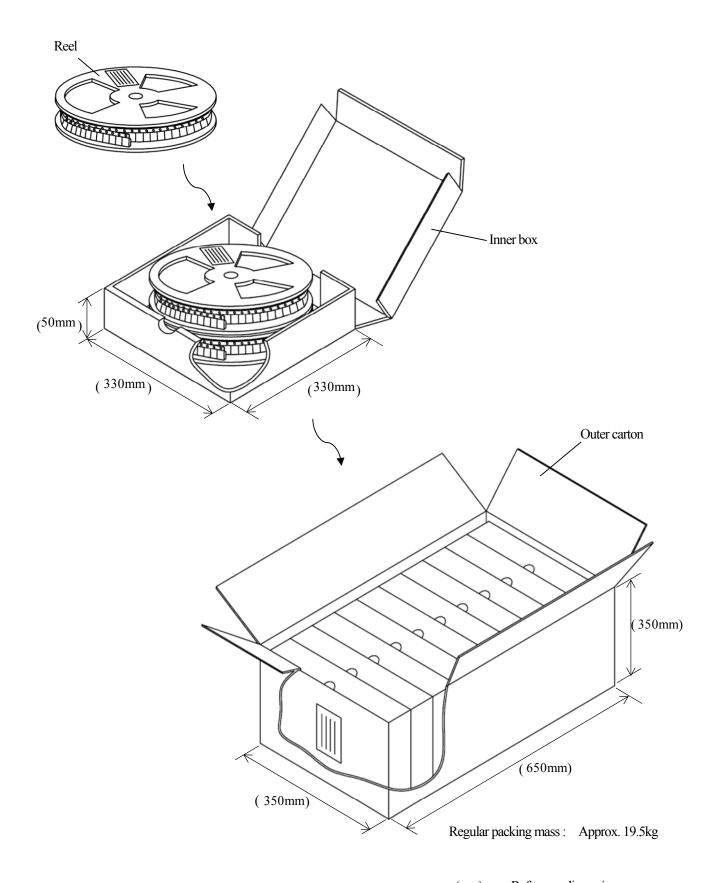

( ) : Reference dimensions



### Precautions for Photocouplers

### 1 Cleaning

(1) Solvent cleaning: Solvent temperature 45°C or less

Immersion for 3 min or less

(2) Ultrasonic cleaning: The effect to device by ultrasonic cleaning differs by cleaning bath size, ultrasonic power output,

cleaning time, PCB size or device mounting condition etc. Please test it in actual using condition

and confirm that any defect doesn't occur before starting the ultrasonic cleaning.

(3) Applicable solvent: Ethyl alcohol, Methyl alcohol, Isopropyl alcohol

When the other solvent is used, there are cases that the packaging resin is eroded.

Please use the other solvent after thorough confirmation is performed in actual using condition.

#### 2. Circuit design

2.1 The LED used in the Photocoupler generally decreases the light emission power by operation. In case of long operation time, please design the circuit in consideration of the degradation of the light emission power of the LED. (50%/5years)

2.2 There are cases that the deviation of the CTR and the degradation of the relative light emission power of the LED increase when the setting value of I<sub>F</sub> is less than 1.0mA. Please design the circuit in consideration of this point.

### 3. Precautions for Soldering

(1) In the case of flow soldering (Avoid immersing units body in the solder)


One time soldering is recommended within the condition of temperature.

Temperature: 260+0/-5°C

Time: 10 s.

Preheat temperature:25 to 140°C

Preheat time: 30 to 80 s

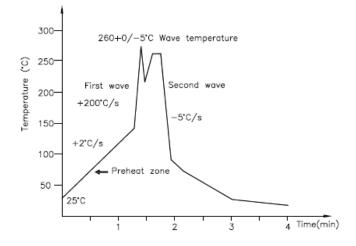




## (2) In the case of IR Reflow soldering

One time soldering reflow is recommended within the condition of temperature and time profile shown below.

Profile item	Conditions		
Preheat			
<ul> <li>Temperature Min (Tsmin)</li> </ul>	150°C		
<ul> <li>Temperature Max (Tsmax)</li> </ul>	200°C		
<ul><li>Time (Min to Max) (ts)</li></ul>	$90 \pm 30  \mathrm{s}$		
Soldering zone			
<ul> <li>Temperature (TL)</li> </ul>	217°C		
• Time (tL)	60 s		
Peak Temperature (TP)	260°C		
Ramp-up rate	3°C/s (Max)		
Ramp-down rate	3~6°C/s		

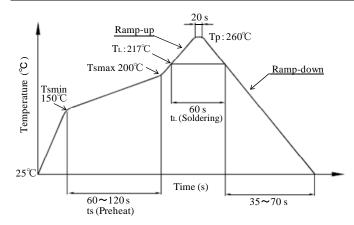

## (3) In the case of hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.

Temperature: 380+0/-5°C

Time: (max.) 3s

## (4) Other precautions

- Avoid immersing units body in the solder
- Depending on equipment and soldering conditions (temperature, Using solder etc.), the effect to the device and the PCB is different.

Please confirm that there is no problem on the actual use conditions in advance.