

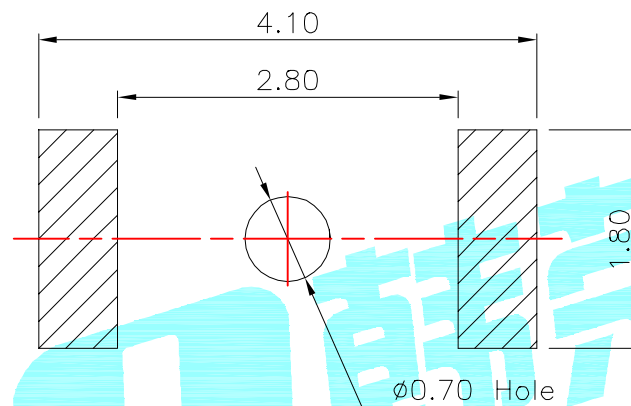




ROHS

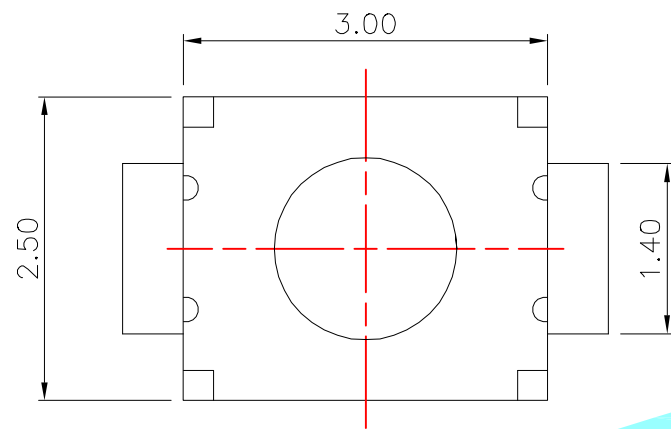

PCB Layout



® Circuit Diagram

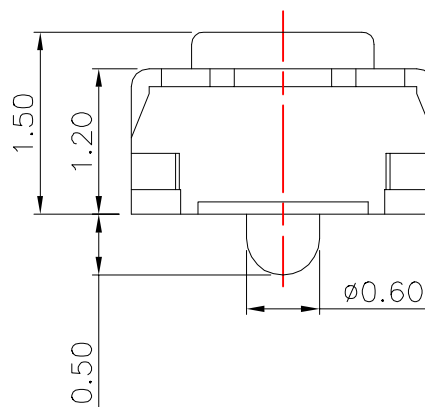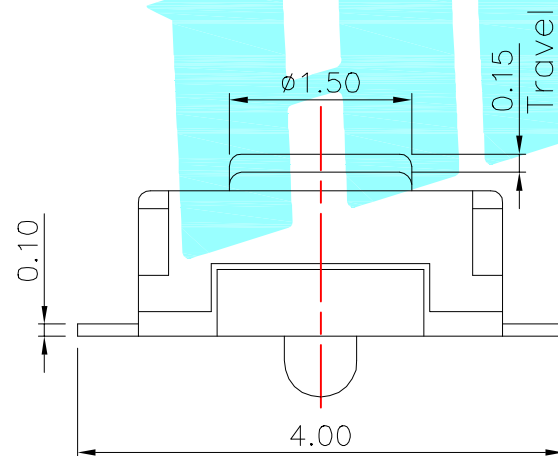


NO.1


PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

PART NO.

K2-1822SA



K2-1822SN



NO.2-NO.3

PART NO	NOTE
01~99	SERIAL NUMBER

⑥	Dust cover	—	1	KAPTON FILM	—	—
⑤	Terminal	—	2	Phosphor Bronze	Plating silver	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	LCP	White	—
②	Cover	—	1	SUS	—	—
①	Keystoke	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DATE

DRAWN J.X.Zhang 2013/7/17

CHECKED

APPROVALS

TITLE:

TACT SWITCHS

PART NO.

K2-1822S□-A□DW-□□

TOLERANCES ARE

30~以上	±0.30
10~30	±0.20
5~10	±0.15
~ 5	±0.10

ANGLE

UNIT: mm

SCALE: 1:1

PROJ:

DRAWING NO.

SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.