

# N-Channel 30-V (D-S) MOSFET

PRODUCT SUMMARY					
V <sub>DS</sub> (V)	$R_{DS(on)}(\Omega)$	I <sub>D</sub> (A) <sup>a</sup>	Q <sub>g</sub> (Typ.)		
30	0.004 at V <sub>GS</sub> = 10 V	18	6.8 nC		
30	0.005 at V <sub>GS</sub> = 4.5 V	16	0.0110		

**SO-8** 

Top View


D D

### **FEATURES**

- · Halogen-free
- TrenchFET® Power MOSFET
- Optimized for High-Side Synchronous Rectifier Operation
- 100 % R<sub>g</sub> Tested
- 100 % UIS Tested

# **APPLICATIONS**

- Notebook CPU Core
  - High-Side Switch



N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS	<b>5</b> T <sub>A</sub> = 25 °C, unles	s otherwise note	d			
Parameter		Symbol	Limit	Unit		
Drain-Source Voltage		V <sub>DS</sub>	30	V		
Gate-Source Voltage		$V_{GS}$	± 20	v		
	T <sub>C</sub> = 25 °C		18			
Continuous Drain Current (T. 450 °C)	T <sub>C</sub> = 70 °C		16			
Continuous Drain Current (T <sub>J</sub> = 150 °C)	T <sub>A</sub> = 25 °C	I <sub>D</sub>	15 <sup>b, c</sup>			
	T <sub>A</sub> = 70 °C		13 <sup>b, c</sup>			
Pulsed Drain Current	•	I <sub>DM</sub>	50	A		
Continuous Course Desir Diede Current	T <sub>C</sub> = 25 °C	1	3.8			
Continuous Source-Drain Diode Current	T <sub>A</sub> = 25 °C	I <sub>S</sub>	2.1 <sup>b, c</sup>			
Single Pulse Avalanche Current	L = 0.1 mH	I <sub>AS</sub>	22			
Avalanche Energy	L = 0.1 IIII	E <sub>AS</sub>	24	mJ		
	T <sub>C</sub> = 25 °C		4.5			
Mandagua Barra Birata atau	T <sub>C</sub> = 70 °C	D .	2.8	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		
Maximum Power Dissipation	T <sub>A</sub> = 25 °C	P <sub>D</sub>	2.5 <sup>b, c</sup>	W		
	T <sub>A</sub> = 70 °C		1.6 <sup>b, c</sup>			
Operating Junction and Storage Temperature Ra	T <sub>J</sub> , T <sub>stq</sub>	- 55 to 150	°C			

THERMAL RESISTANCE RATINGS					
Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient <sup>b, d</sup>	t ≤ 10 s	$R_{thJA}$	38	50	°C/W
Maximum Junction-to-Foot (Drain)	Steady State	$R_{thJF}$	22	28	C/VV

## Notes:

- a. Base on  $T_C = 25$  °C.
- b. Surface Mounted on 1" x 1" FR4 board.
- c. t = 10 s
- d. Maximum under Steady State conditions is 85 °C/W.




2


Static         Vps         Vps         Vps (Semperature Coefficient)         Δ/ps (Fundamental Coefficient)	<b>SPECIFICATIONS</b> $T_J = 25  ^{\circ}\text{C}$ Parameter	Symbol	Test Conditions	Min.	Тур.	Max.	Unit	
Drain-Source Breakdown Voltage         V <sub>DS</sub> V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA         30         V           V <sub>DS</sub> Temperature Coefficient         ΔV <sub>DS</sub> (T)         I <sub>D</sub> = 250 μA         28         mV/r <sup>O</sup> C <sub>S(DI)</sub> Temperature Coefficient         ΛV <sub>DS</sub> (T)         I <sub>D</sub> = 250 μA         1.0         3.0         V           Gate-Source Threshold Voltage         V <sub>OS</sub> (T)         V <sub>DS</sub> = V <sub>OS</sub> , I <sub>D</sub> = 250 μA         1.0         3.0         V           Gate-Source Leakage         I <sub>GSS</sub> V <sub>DS</sub> = V <sub>OS</sub> , I <sub>D</sub> = 250 μA         1.0         3.0         V           Zero Gate Voltage Drain Current         I <sub>DSS</sub> V <sub>DS</sub> = 0V, V <sub>GS</sub> = 20 V         1         μA           On-State Drain Current <sup>a</sup> I-D(I <sub>D</sub> )         V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V         20         A           On-State Drain Current <sup>a</sup> I-D(I <sub>D</sub> )         V <sub>DS</sub> = 15 V, V <sub>DS</sub> = 10 V         20         A           On-State Resistance         R <sub>DS</sub> (on)         V <sub>DS</sub> = 15 V, I <sub>D</sub> = 11 A         0.0004         Ω           Provard Transconductance         G <sub>DS</sub> V <sub>DS</sub> = 15 V, V <sub>DS</sub> = 0 V, I = 1 MHz         820         Q           Input Capacitance         C <sub>Gss</sub> V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 0 V, I = 1 MHz         820         Q           Moyanamic*         V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 11 A         1.5         2		Cymbol	rest conditions	141111.	l igh.	IVIGA.	Oint	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		V <sub>DS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA	30			V	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$					28		mV/°C	
Gate-Source Threshold Voltage   V <sub>GS</sub> (th)   V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA   1.0   3.0   V   V <sub>DS</sub> = Source Leakage   I <sub>GSS</sub>   V <sub>DS</sub> = 0 V, V <sub>GS</sub> = 2 0 V   ± 100   nA   V <sub>DS</sub> = Source Leakage   I <sub>GSS</sub>   V <sub>DS</sub> = 0 V, V <sub>GS</sub> = 2 0 V   ± 100   nA   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 10 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 10 V   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 10 V   V <sub>DS</sub> = 55 °C   V <sub>GS</sub> = 10 V   V <sub>DS</sub> = 10 V, V <sub>DS</sub> = 10 V   V <sub>DS</sub> = 10 V, V <sub>DS</sub> = 10 V   V <sub>DS</sub> = 10 V,			$I_D = 250 \mu\text{A}$					
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		1	$V_{DS} = V_{GS}, I_D = 250 \mu A$	1.0		3.0	V	
Vos = 30 V, Vos = 0 V						ļ	nA	
DSS   V <sub>DS</sub> = 30 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 55 °C   10		000				ļ		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Zero Gate Voltage Drain Current	I <sub>DSS</sub>				-	μA	
Drain-Source On-State Resistance <sup>a</sup> R <sub>DS(on)</sub> V <sub>GS</sub> = 10 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 10 A V <sub>GS</sub> = 10 A V <sub>GS</sub> = 10 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 10 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 10 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>GS</sub> = 10 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 11 A V <sub>GS</sub> = 15 V, I <sub>D</sub> = 15 V, I <sub></sub>	On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>		20			А	
Forward Transconductance  a   9fs   V <sub>DS</sub> = 15 V, I <sub>D</sub> = 11 A   52   S   S			V <sub>GS</sub> = 10 V, I <sub>D</sub> = 11 A		0.004			
Promard Transconductance   Promard Transconductance   Promard	Drain-Source On-State Resistance <sup>a</sup>	R <sub>DS(on)</sub>	55 5		0.005			
Dynamic   Dyn	Forward Transconductance <sup>a</sup>	9 <sub>fs</sub>	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 11 A		52		S	
Input Capacitance   C   C   S   C   C   C   C   C   C   C	Dynamic <sup>b</sup>							
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Input Capacitance	C <sub>iss</sub>			820		pF	
Reverse Transfer Capacitance   C r <sub>rss</sub>   73   75   75   75   75   75   75   75	Output Capacitance	+	$V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$		195			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Reverse Transfer Capacitance				73			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Total Gate Charge		V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> = 11 A		15	23		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		Q <sub>g</sub>		6.8	10.2			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Gate-Source Charge	$Q_{gs}$	$V_{DS} = 15 \text{ V}, V_{GS} = 5 \text{ V}, I_{D} = 11 \text{ A}$		2.5		- nC	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Gate-Drain Charge	Q <sub>gd</sub>			2.3			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Gate Resistance	R <sub>g</sub>	f = 1 MHz	0.36	1.8	3.6	Ω	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Turn-On Delay Time	t <sub>d(on)</sub>			16	24		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Rise Time	t <sub>r</sub>	$V_{DD}$ = 15 V, $R_L$ = 1.4 $\Omega$		12	18		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D \cong 9 \text{ A}, V_{GEN} = 4.5 \text{ V}, R_g = 1 \Omega$		16	24		
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Fall Time	t <sub>f</sub>			10	20	no	
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Turn-On Delay Time	t <sub>d(on)</sub>			8	16	115	
Fall Time $t_f$ 8 15  Drain-Source Body Diode Characteristics  Continuous Source-Drain Diode Current $l_S$ $T_C = 25 ^{\circ}\text{C}$ 25  Pulse Diode Forward Current <sup>a</sup> $l_{SM}$ 50  Body Diode Voltage $l_{SD}$ $l_S = 9 ^{\circ}\text{A}$ 0.8 1.2 V  Body Diode Reverse Recovery Time $l_{Tr}$ 15 30 ns  Body Diode Reverse Recovery Charge $l_{F}$ $l_{F} = 9 ^{\circ}\text{A}$ , $l_{F} = 25 ^{\circ}\text{C}$ 8	Rise Time	t <sub>r</sub>	$V_{DD}$ = 15 V, $R_L$ = 1.4 $\Omega$		10	20	- - -	
	Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D \cong 9 \text{ A}, V_{GEN} = 10 \text{ V}, R_g = 1 \Omega$		16	24		
Continuous Source-Drain Diode Current $I_S$ $T_C = 25 ^{\circ}\text{C}$ $25$ A Pulse Diode Forward Current $I_S$ $I_{SM}$ $50$ Body Diode Voltage $I_S = 9 ^{\circ}\text{A}$ $0.8 ^{\circ}\text{A}$ $1.2 ^{\circ}\text{C}$ $1.2 ^{\circ}\text{C}$ Body Diode Reverse Recovery Time $I_{rr}$ Body Diode Reverse Recovery Charge $I_S = 9 ^{\circ}\text{A}$ $I_S = 9 ^{\circ}\text{A}$ $I_S = 9 ^{\circ}\text{C}$	Fall Time	t <sub>f</sub>			8	15		
Pulse Diode Forward Current <sup>a</sup> $I_{SM}$ $50$ Body Diode Voltage $V_{SD}$ $I_{S} = 9$ A $0.8$ $1.2$ $V_{SD}$ Body Diode Reverse Recovery Time $t_{rr}$ Body Diode Reverse Recovery Charge $Q_{rr}$ Reverse Recovery Fall Time $t_{a}$ $I_{F} = 9$ A, $dI/dt = 100$ A/ $\mu$ s, $T_{J} = 25$ °C $V_{SD}$ $V$	<b>Drain-Source Body Diode Characteris</b>	ics						
Pulse Diode Forward Currenta $I_{SM}$ 50Body Diode Voltage $V_{SD}$ $I_S = 9 A$ 0.81.2 $V$ Body Diode Reverse Recovery Time $t_{rr}$ 1530nsBody Diode Reverse Recovery Charge $Q_{rr}$ $I_F = 9 A$ , $dI/dt = 100 A/\mu s$ , $T_J = 25 °C$ 612nCReverse Recovery Fall Time $t_a$ $t_a$ $t_a$ $t_a$ $t_a$	Continuous Source-Drain Diode Current	I <sub>S</sub>	$T_C = 25  ^{\circ}C$			25		
Body Diode Reverse Recovery Time $t_{rr}$ Body Diode Reverse Recovery Charge $Q_{rr}$ Reverse Recovery Fall Time $t_a$ $I_F = 9 \text{ A, dl/dt} = 100 \text{ A/µs, T}_J = 25 \text{ °C}$ $15  30  \text{ns}$ $6  12  \text{nC}$ $8  \text{ns}$	Pulse Diode Forward Current <sup>a</sup>					50		
Body Diode Reverse Recovery Charge $Q_{rr}$ Reverse Recovery Fall Time $t_a$ $I_F = 9 \text{ A, dI/dt} = 100 \text{ A/µs, T}_J = 25 \text{ °C}$ $6 \qquad 12 \qquad \text{nC}$ $8 \qquad \text{ns}$	Body Diode Voltage	$V_{SD}$	I <sub>S</sub> = 9 A		0.8	1.2	V	
Reverse Recovery Fall Time t <sub>a</sub>	Body Diode Reverse Recovery Time	t <sub>rr</sub>			15	30	ns	
Reverse Recovery Fall Time t <sub>a</sub>	Body Diode Reverse Recovery Charge	Q <sub>rr</sub>	L = 0 A dl/dt = 100 A/va T = 25 °C		6	12	nC	
Reverse Recovery Rise Time t <sub>b</sub> ns	Reverse Recovery Fall Time		$_{1F} = 9 \text{ A}, \text{ u//ut} = 100 \text{ A/}\mu\text{s}, 1_{J} = 25 ^{\circ}\text{C}$		8			
	Reverse Recovery Rise Time	t <sub>b</sub>			7		ns	

- a. Pulse test; pulse width  $\leq 300~\mu s,$  duty cycle  $\leq 2~\%.$  b. Guaranteed by design, not subject to production testing.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.









On-Resistance vs. Drain Current and Gate Voltage



V<sub>GS</sub> - Gate-to-Source Voltage (V) **Transfer Characteristics** 





V<sub>DS</sub> - Drain-to-Source Voltage (V)



On-Resistance vs. Junction Temperature









#### Source-Drain Diode Forward Voltage






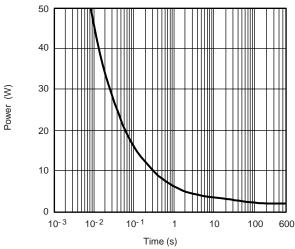

### Threshold Voltage


Single Pulse Power, Junction-to-Ambient





\*  $V_{GS} > \mbox{minimum } V_{GS}$  at which  $R_{DS(on)}$  is specified

Safe Operating Area, Junction-to-Ambient











\* The power dissipation  $P_D$  is based on  $T_{J(max)} = 150$  °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.



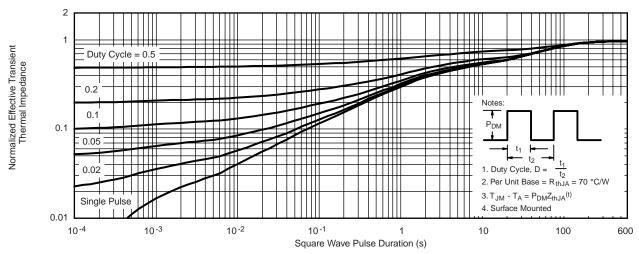


Normalized Thermal Transient Impedance, Junction-to-Ambient

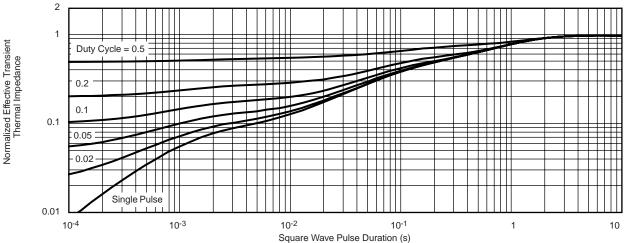



Normalized Thermal Transient Impedance, Junction-to-Foot



**SOIC (NARROW): 8-LEAD**JEDEC Part Number: MS-012





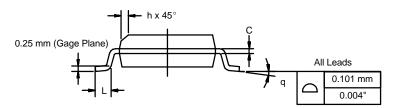


	MILLIMETERS		INC	HES		
DIM	Min	Max	Min	Max		
Α	1.35	1.75	0.053	0.069		
A <sub>1</sub>	0.10	0.20	0.004	0.008		
В	0.35	0.51	0.014	0.020		
С	0.19	0.25	0.0075	0.010		
D	4.80	5.00	0.189	0.196		
E	3.80	4.00	0.150	0.157		
е	1.27 BSC		0.050	0.050 BSC		
Н	5.80	6.20	0.228	0.244		
h	0.25	0.50	0.010	0.020		
L	0.50	0.93	0.020	0.037		
q	0°	8°	0°	8°		
S	0.44	0.64	0.018	0.026		
FCN: C-06527-Rev I 11-Sep-06						

ECN: C-06527-Rev. I, 11-Sep-06

DWG: 5498



# **RECOMMENDED MINIMUM PADS FOR SO-8**

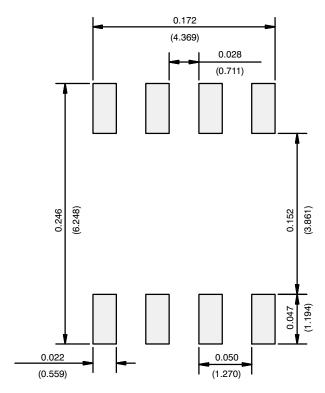

Recommended Minimum Pads Dimensions in Inches/(mm)



# **Disclaimer**

All products due to improve reliability, function or design or for other reasons, product specifications and data are subject to change without notice.

Taiwan VBsemi Electronics Co., Ltd., branches, agents, employees, and all persons acting on its or their representatives (collectively, the "Taiwan VBsemi"), assumes no responsibility for any errors, inaccuracies or incomplete data contained in the table or any other any disclosure of any information related to the product.(www.VBsemi.tw)

Taiwan VBsemi makes no guarantee, representation or warranty on the product for any particular purpose of any goods or continuous production. To the maximum extent permitted by applicable law on Taiwan VBsemi relinquished: (1) any application and all liability arising out of or use of any products; (2) any and all liability, including but not limited to special, consequential damages or incidental; (3) any and all implied warranties, including a particular purpose, non-infringement and merchantability guarantee.

Statement on certain types of applications are based on knowledge of the product is often used in a typical application of the general product VBsemi Taiwan demand that the Taiwan VBsemi of. Statement on whether the product is suitable for a particular application is non-binding. It is the customer's responsibility to verify specific product features in the products described in the specification is appropriate for use in a particular application. Parameter data sheets and technical specifications can be provided may vary depending on the application and performance over time. All operating parameters, including typical parameters must be made by customer's technical experts validated for each customer application. Product specifications do not expand or modify Taiwan VBsemi purchasing terms and conditions, including but not limited to warranty herein.

Unless expressly stated in writing, Taiwan VBsemi products are not intended for use in medical, life saving, or life sustaining applications or any other application. Wherein VBsemi product failure could lead to personal injury or death, use or sale of products used in Taiwan VBsemi such applications using client did not express their own risk. Contact your authorized Taiwan VBsemi people who are related to product design applications and other terms and conditions in writing.

The information provided in this document and the company's products without a license, express or implied, by estoppel or otherwise, to any intellectual property rights granted to the VBsemi act or document. Product names and trademarks referred to herein are trademarks of their respective representatives will be all.

# **Material Category Policy**

Taiwan VBsemi Electronics Co., Ltd., hereby certify that all of the products are determined to be RoHS compliant and meets the definition of restrictions under Directive of the European Parliament 2011/65 / EU, 2011 Nian. 6. 8 Ri Yue restrict the use of certain hazardous substances in electrical and electronic equipment (EEE) - modification, unless otherwise specified as inconsistent.(www.VBsemi.tw)

Please note that some documents may still refer to Taiwan VBsemi RoHS Directive 2002/95 / EC. We confirm that all products identified as consistent with the Directive 2002/95 / EC European Directive 2011/65 /.

Taiwan VBsemi Electronics Co., Ltd. hereby certify that all of its products comply identified as halogen-free halogen-free standards required by the JEDEC JS709A. Please note that some Taiwanese VBsemi documents still refer to the definition of IEC 61249-2-21, and we are sure that all products conform to confirm compliance with IEC 61249-2-21 standard level JS709A.