此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



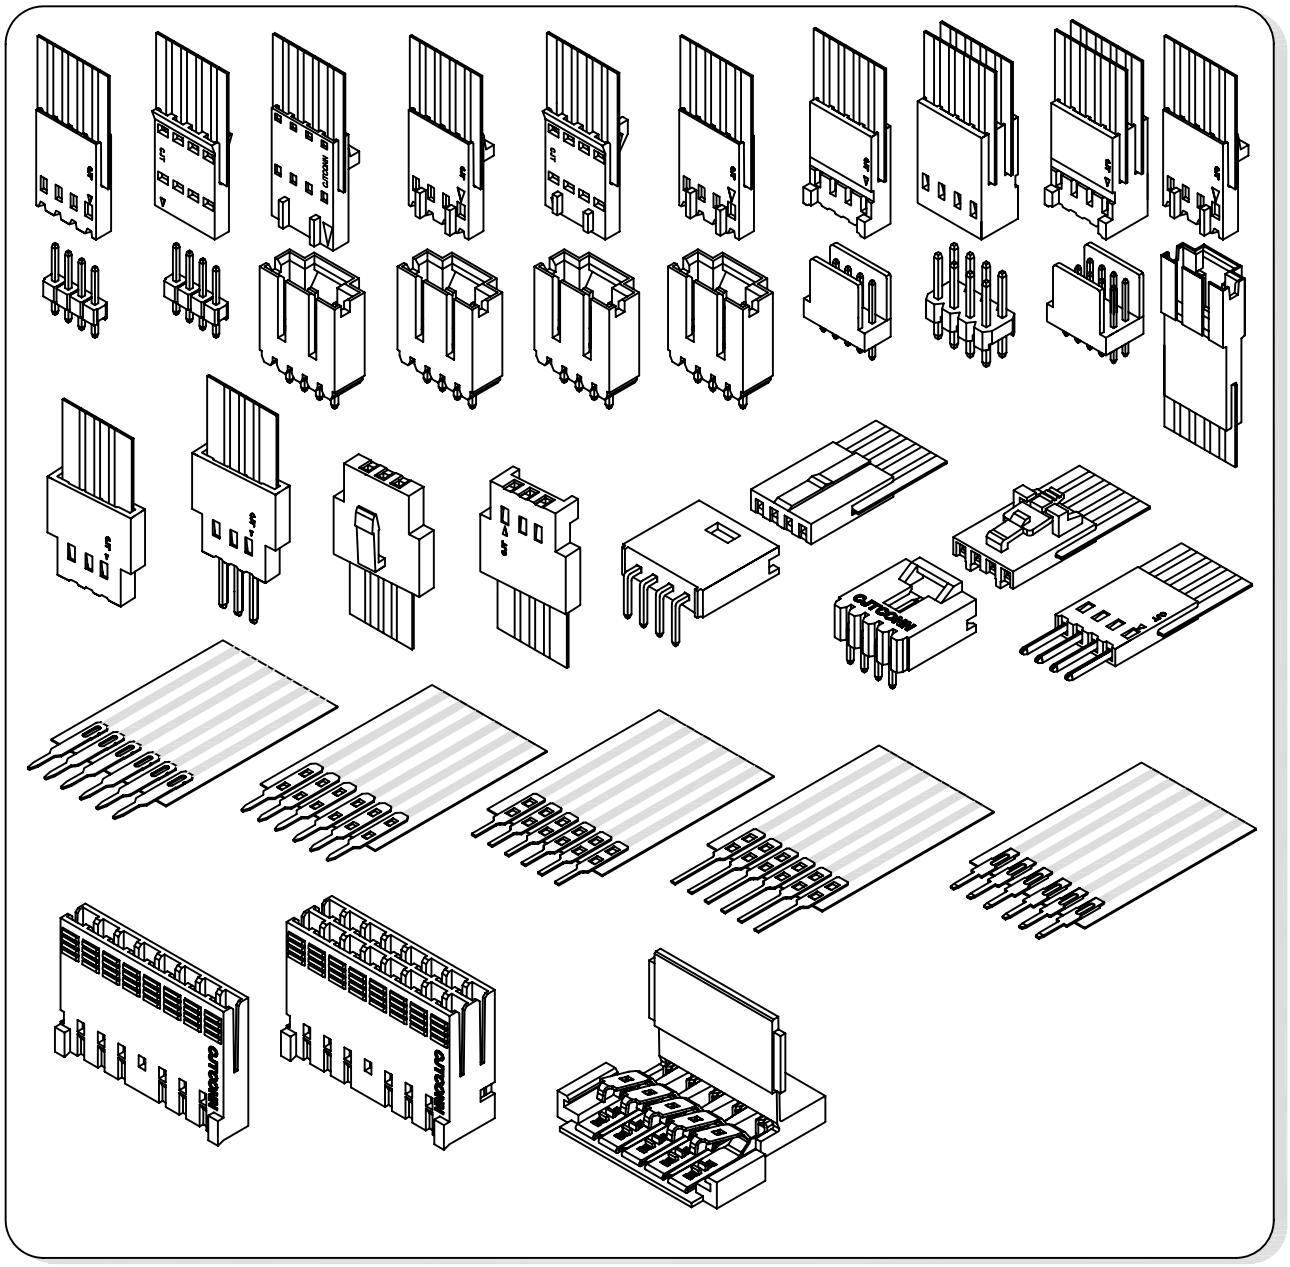

# Specifications

Current rating:3A AC,DC
Voltage rating:300V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:5mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:1100V AC/minute
*Compliant with RoHS and REACH*
*Meet the HF/Halogen Free,need to customize*
*Contact CJT for details*

## Standards

E326732 E326732

## Contact Layout

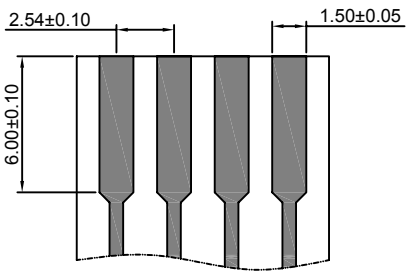

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550-T

2.54mm Pitch High Insertion Force Crimp Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

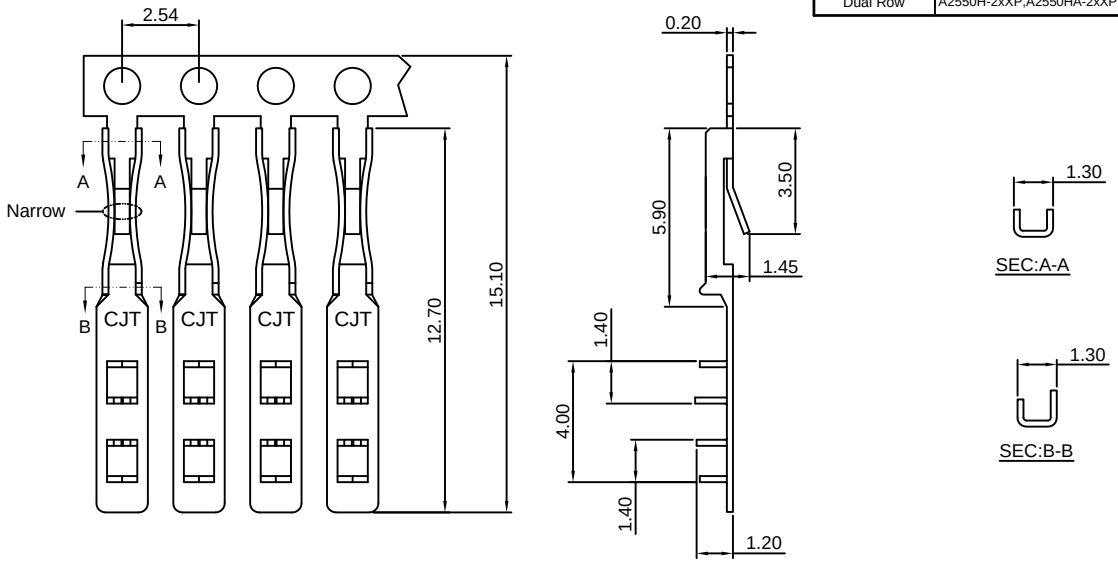


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550-T-H

2.54mm Pitch Low insertion Force Crimp Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

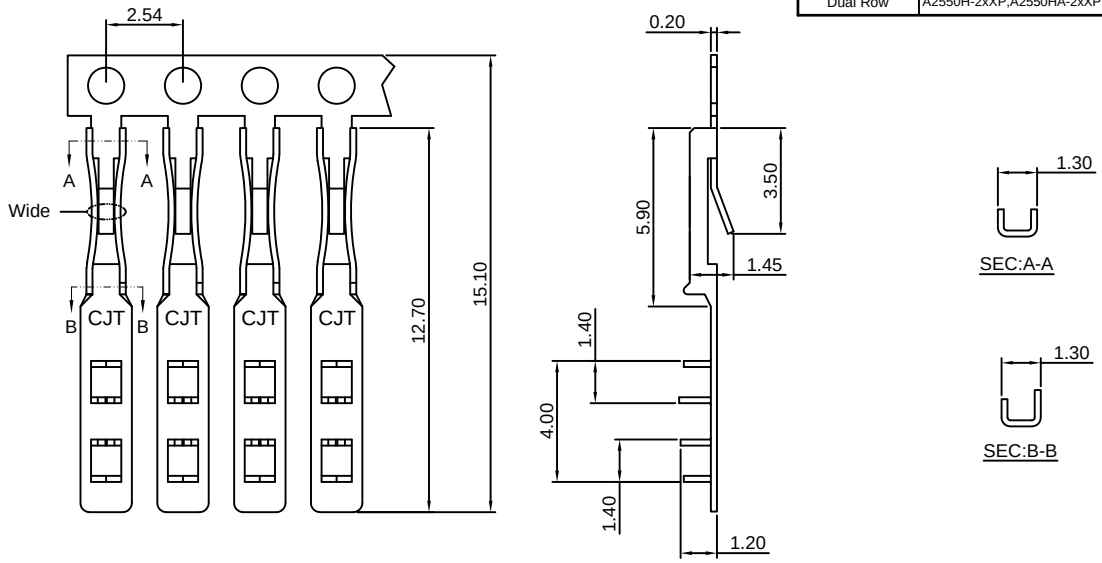


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-H | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-H | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550-T-CR

2.54mm Pitch High Insertion Force Crimp Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

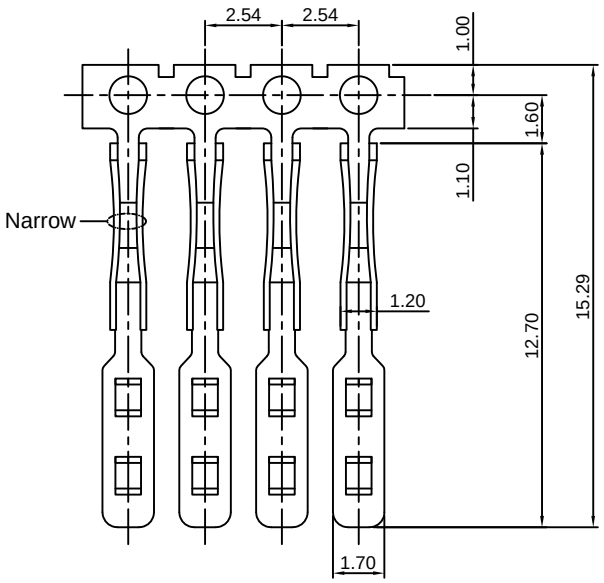


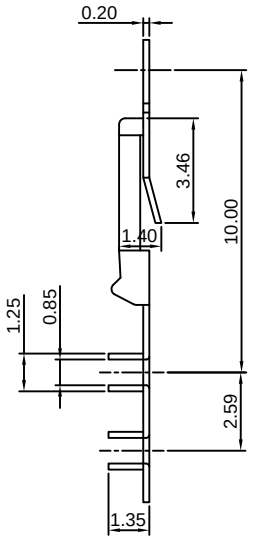


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-CR | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-CR | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550-T-H-CR

2.54mm Pitch Low insertion Force Crimp Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

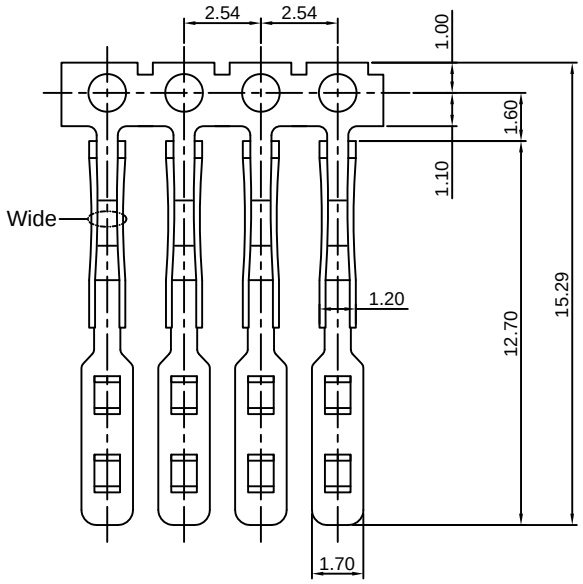


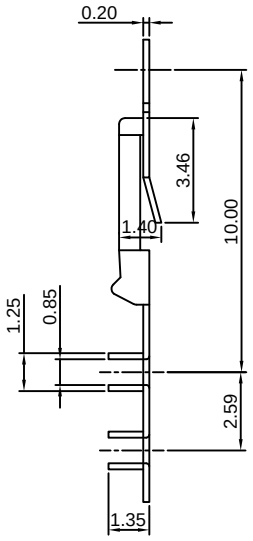


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-H-CR | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-H-CR | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550-T-A

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

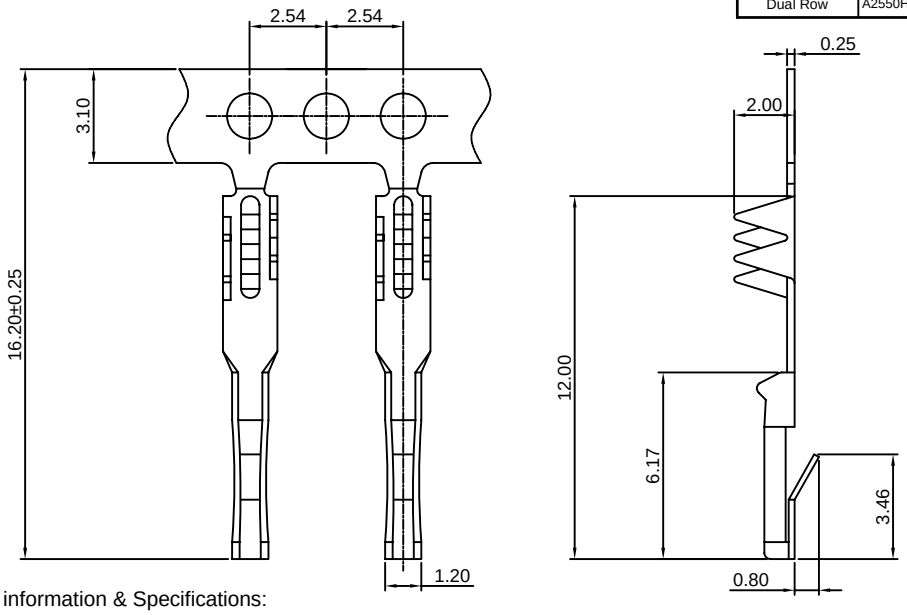


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-A | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 10,000 PCS |
| A2550-GP-A | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

# A2550-T-C

2.54mm Pitch Hi-Flex Crimp Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing
*The Hi-Flex female contact designed to offer a stable insertion force and low contact resistance over larger number of mating cycles
*More resistant to danage by bent or angled pins,primarily on test devices

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP,A2550HA-XP,A2550HB-XP,A2550H-XP-A |
| | A2550H-XP-B,A2550H-XP-C,A2550H-XP-C1,A2550H-XP-D |
| | A2550H-XP-E,A2550H-XP-F,A2550H-XP-J |
| Dual Row | A2550H-2xXP,A2550HA-2xXP |

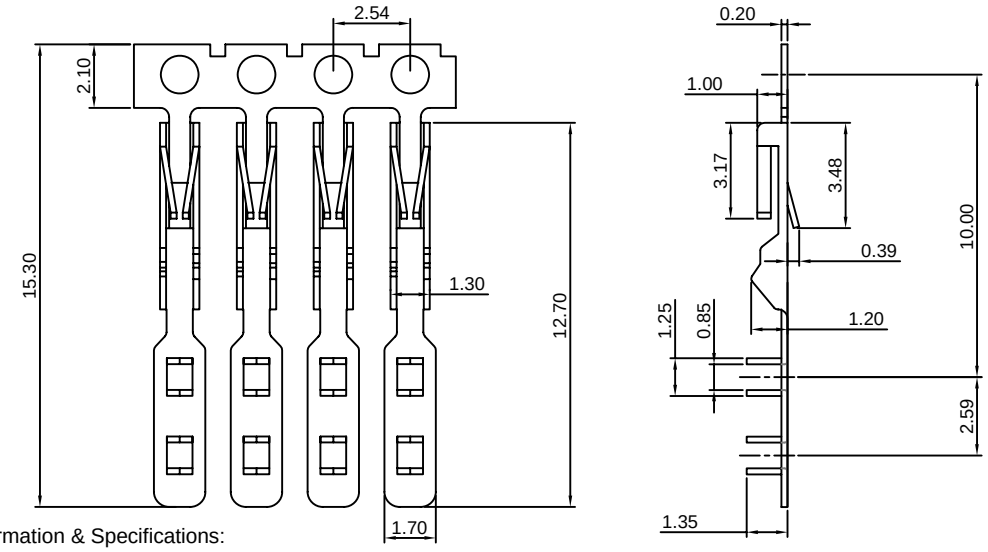


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-C | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-C | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550-T-D 2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Designed for Soldering directly to Flexible PCB
or Ultra Thin Rigged PCBs

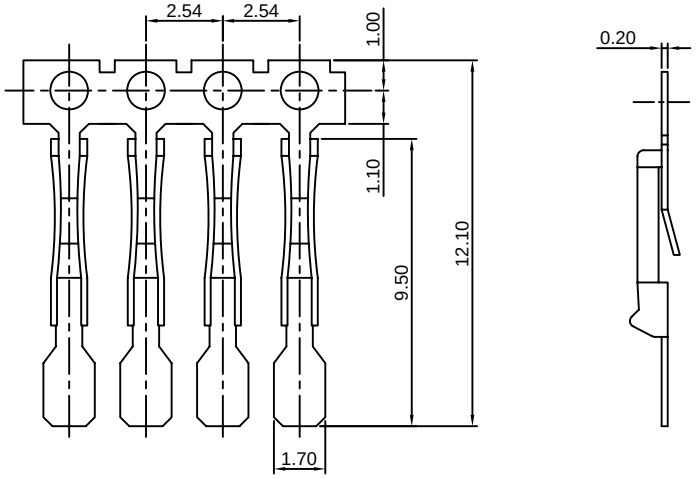


Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-D | PCBs | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-D | PCBs | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550-T-E 2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP-M A2550H-XP-M1 A2550H-XP-M2 A2550H-XP-MH |
| | A2550H-XP-M3 |

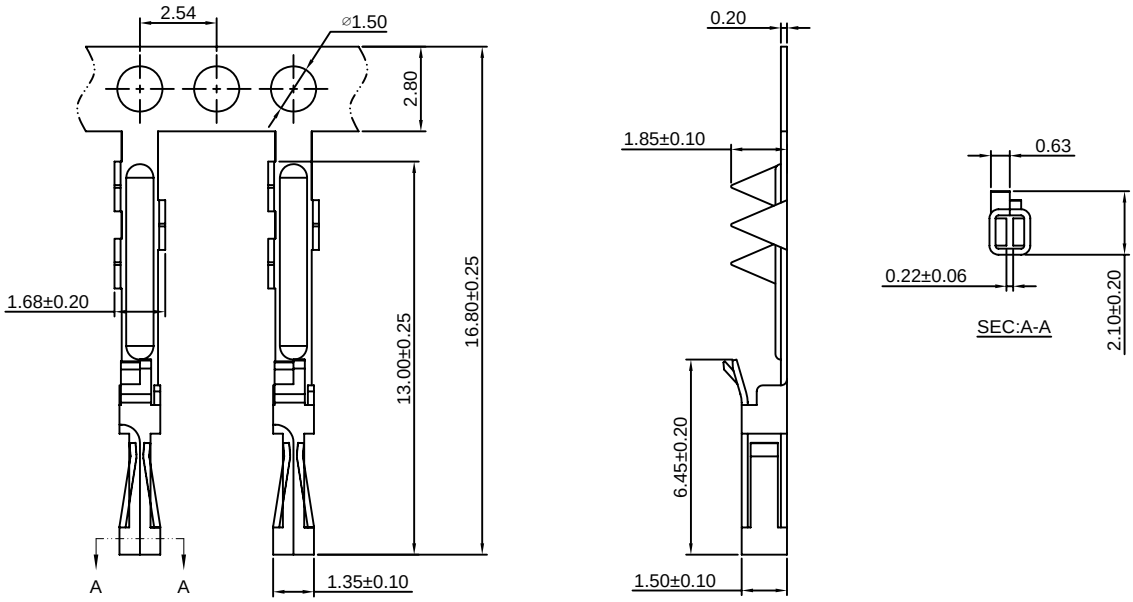


Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-E | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 15,000 PCS |
| A2550-GP-E | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 15,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550-T-F 2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire and Electronic wire

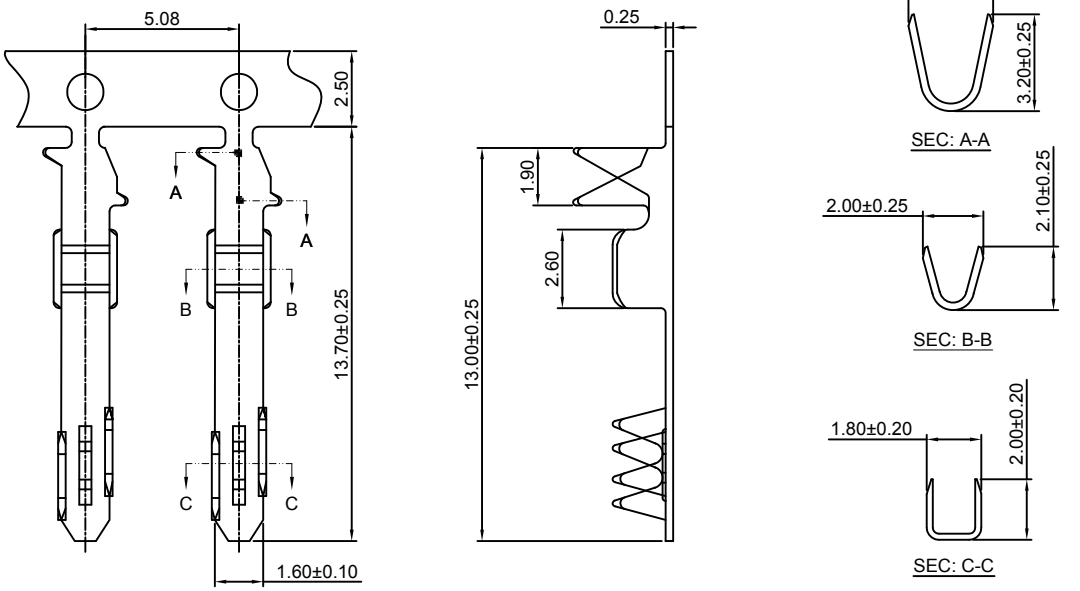


Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-F | FFC WIRE/AWG#20-#26 | 1.80mm(max) | Phosphor Bronze | Tin over Nickel | 15,000 PCS |
| A2550-GP-F | FFC WIRE/AWG#20-#26 | 1.80mm(max) | Phosphor Bronze | Gold over Nickel | 15,000 PCS |

Optional Gold plating available but MOQ requested

## A2550-T-J 2.54mm pitch Crimp Flex Terminal

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP-G, A2550H-XP-H, A2550H-XP-I |

**Reference Informations:**
*Used in CJT A2550 series Housing

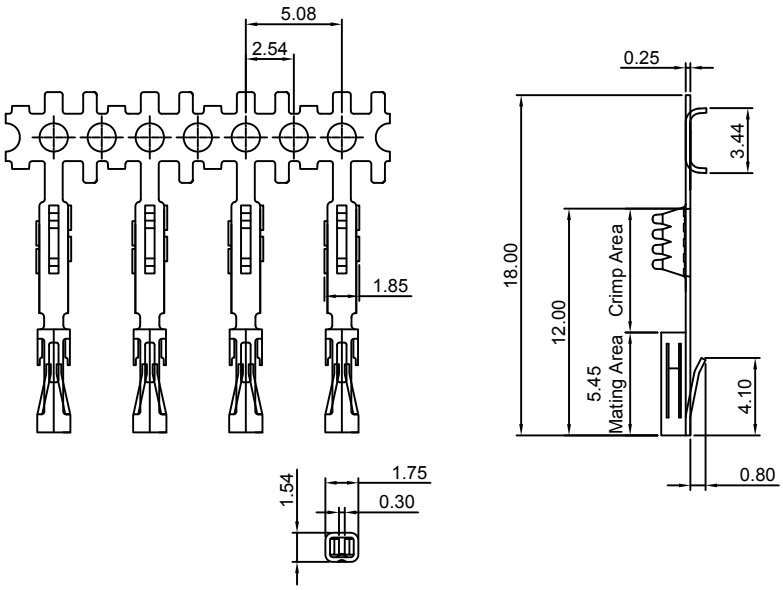


Ordering Information:
A2550-GP-J - ***
1 2
1.Part No.
2.Finish
TG :Mating Area : 100μin (2.54μm) MIN. Tin
Crimp Area: 1μin (0.025μm) MIN. Gold
GT15 :Mating Area :15μin (0.38μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GT30 :Mating Area :30μin (0.76μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GT50 :Mating Area :50μin (1.27μm) MIN. Gold
Crimp Area: 100μin (2.54μm) MIN. Tin
GG15 :Mating Area :15μin (0.38μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold
GG30 :Mating Area :30μin (0.76μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold
GG50 :Mating Area :50μin (1.27μm) MIN. Gold
Crimp Area: 1μin (0.025μm) MIN. Gold

Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-J | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 10,000 PCS |
| A2550-GP-J | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550-T-K

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in CJT A2550HK series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550HK-XP |
| Dual Row | A2550HK-2xXP |

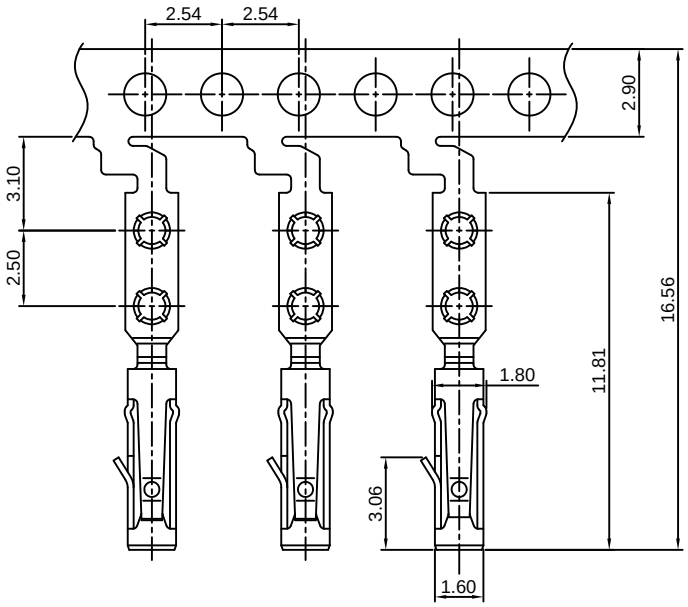


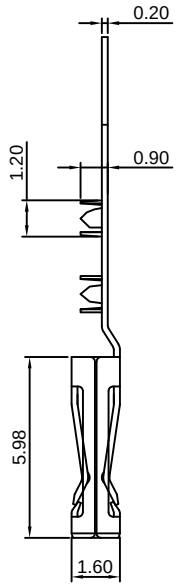


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550-TP-K | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550-GP-K | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in CJT A2550 series Housing

Use With CJT A2550 series Housing：

| | |
|---|---|
| Single Row | A2550H-XP, A2550H-XP-D |
| Dual Row | A2550H-2xXP |

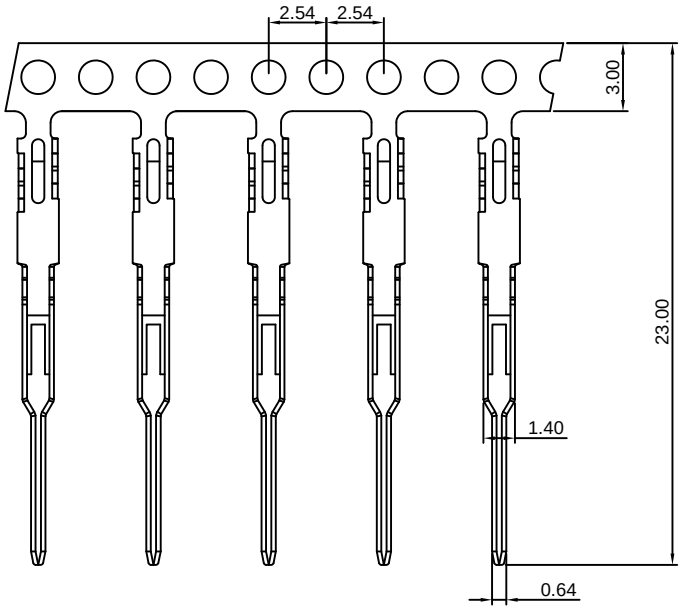


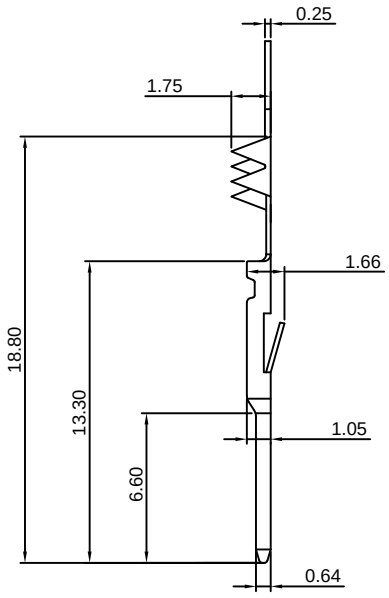


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 10,000 PCS |
| A2550M-GP | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-C

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

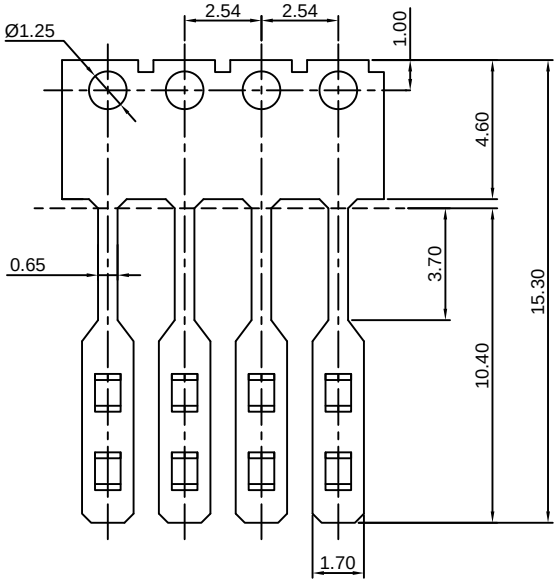


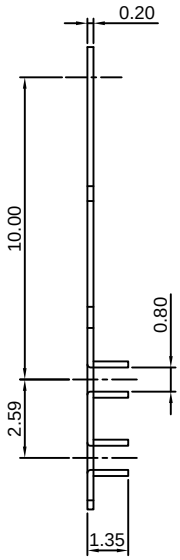





Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-C | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-C | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-CA

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

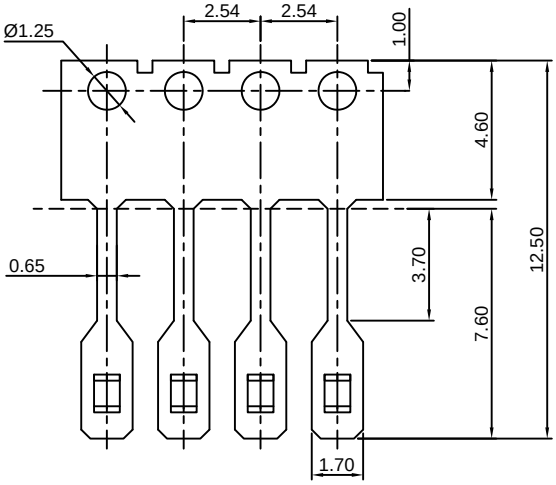


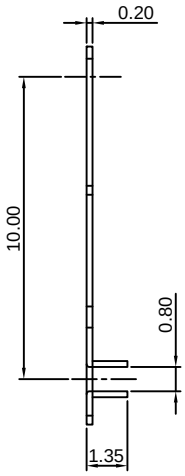





Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-CA | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-CA | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-C1

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

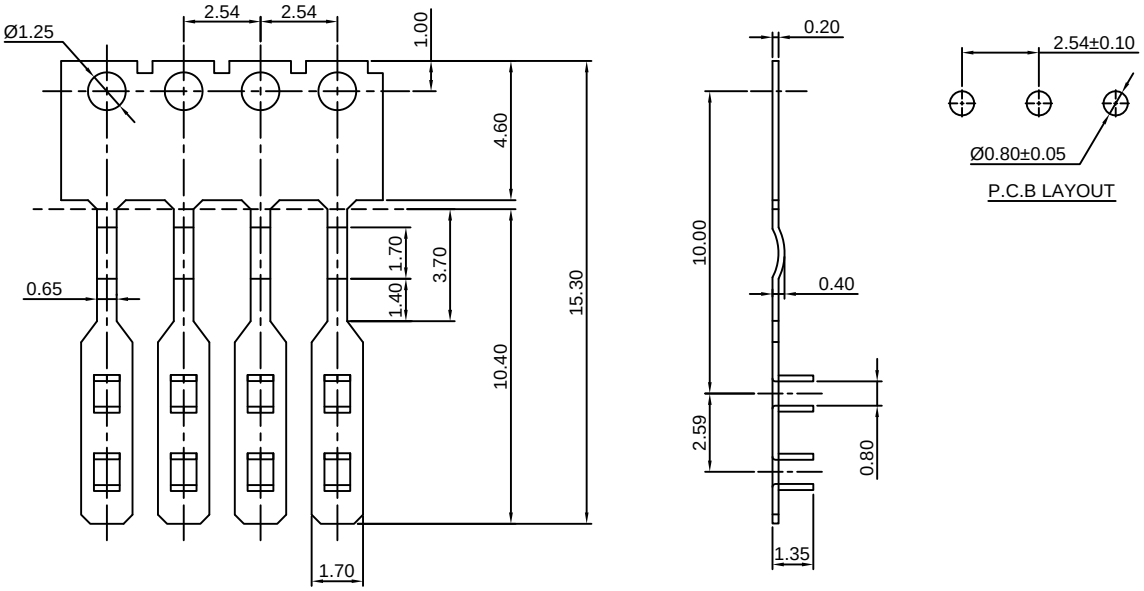


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-C1 | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-C1 | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-C1A

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

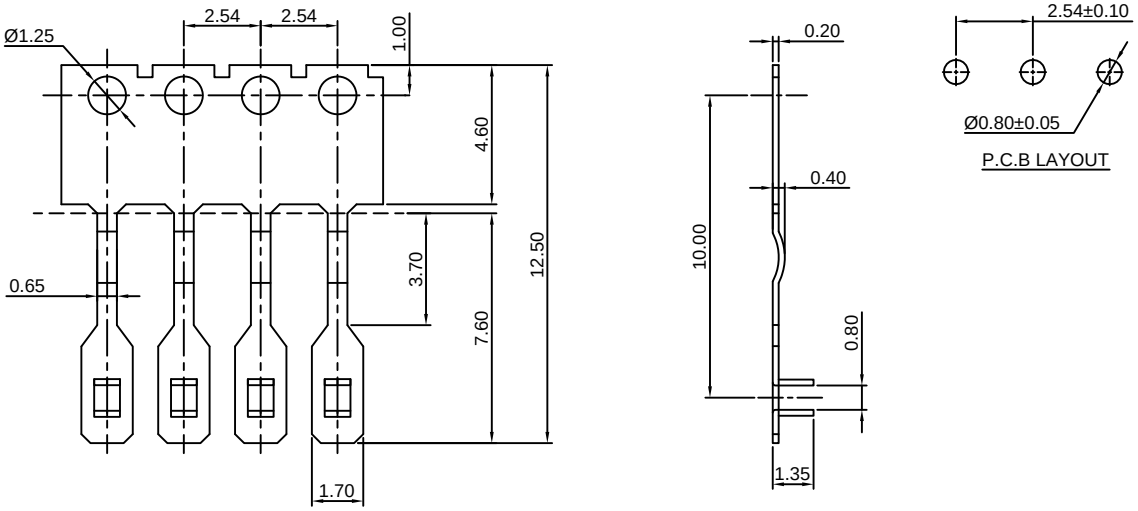


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-C1A | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-C1A | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-C2

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

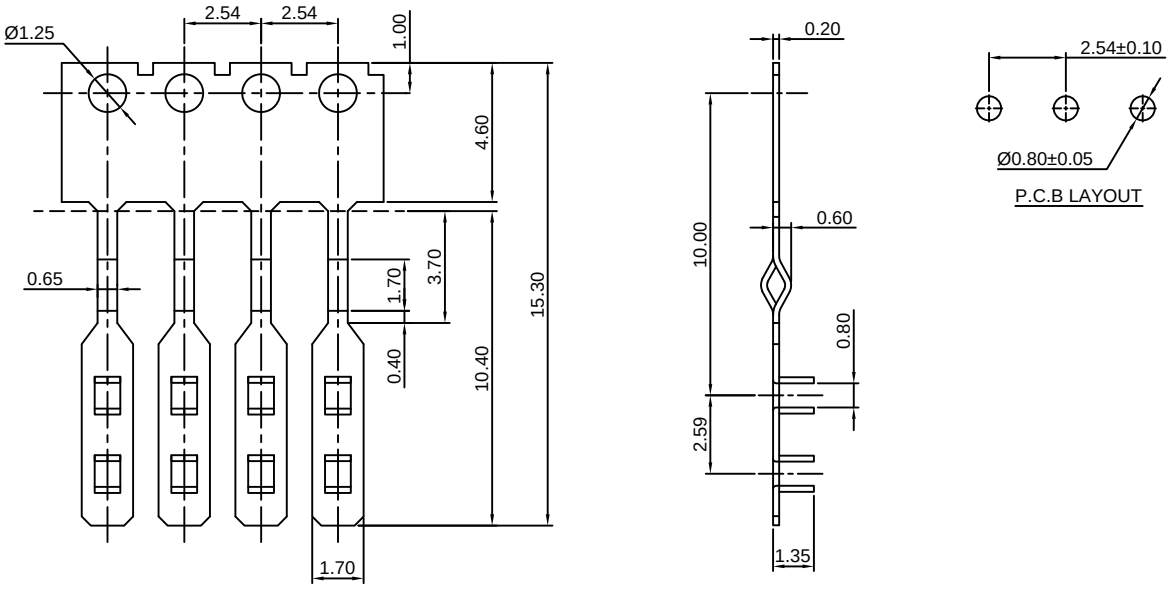


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-C2 | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-C2 | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-D

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in CJT A2550HM A2550HMA
A2550H-M1 A2550H-M3 series Housing

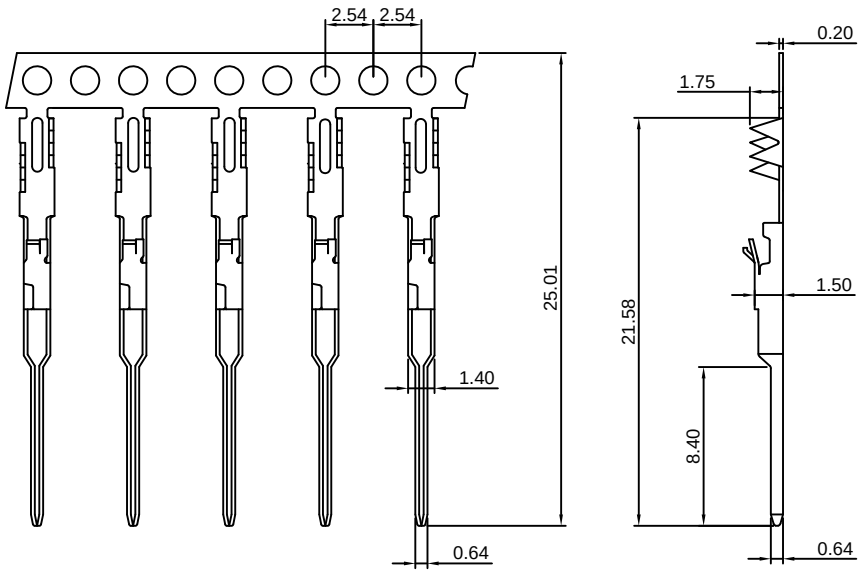


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-D | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 10,000 PCS |
| A2550M-GP-D | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-E

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

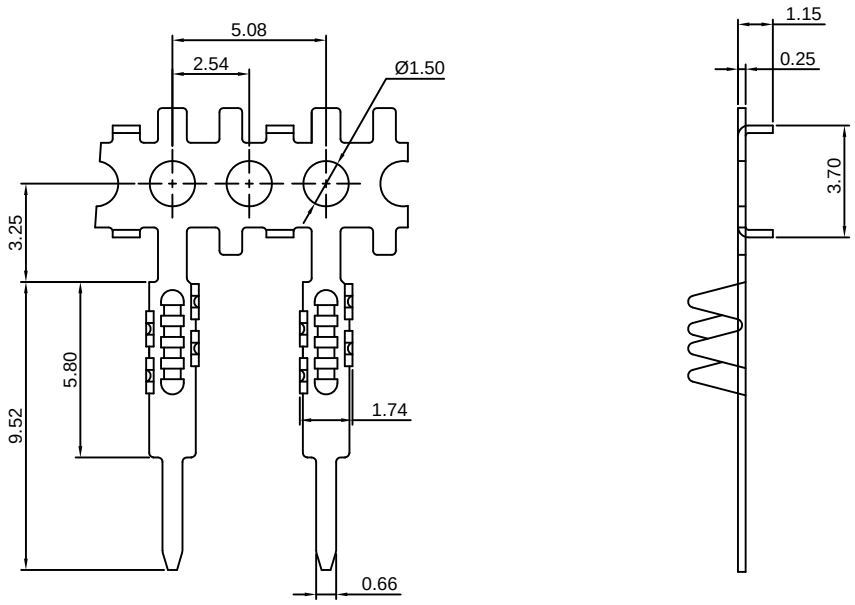


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-E | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 10,000 PCS |
| A2550M-GP-E | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 10,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-KE

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

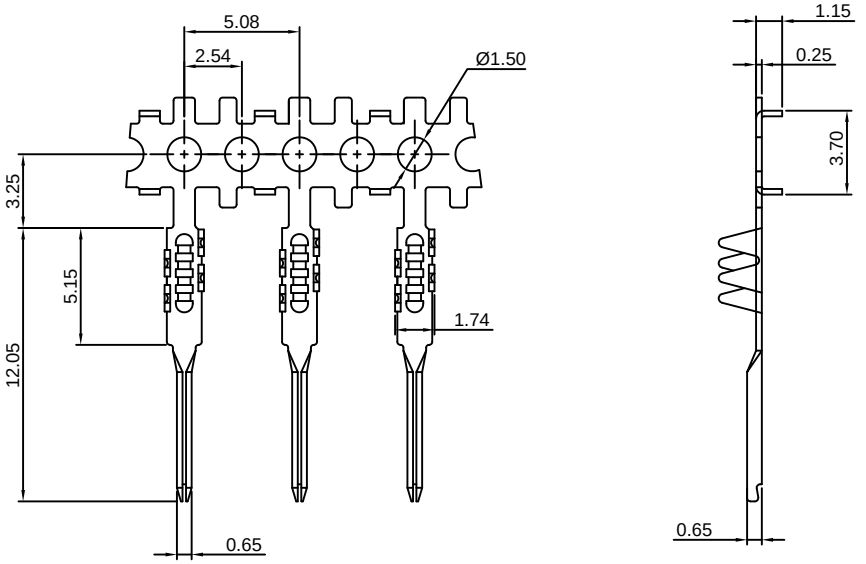


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-KE | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-KE | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-F

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

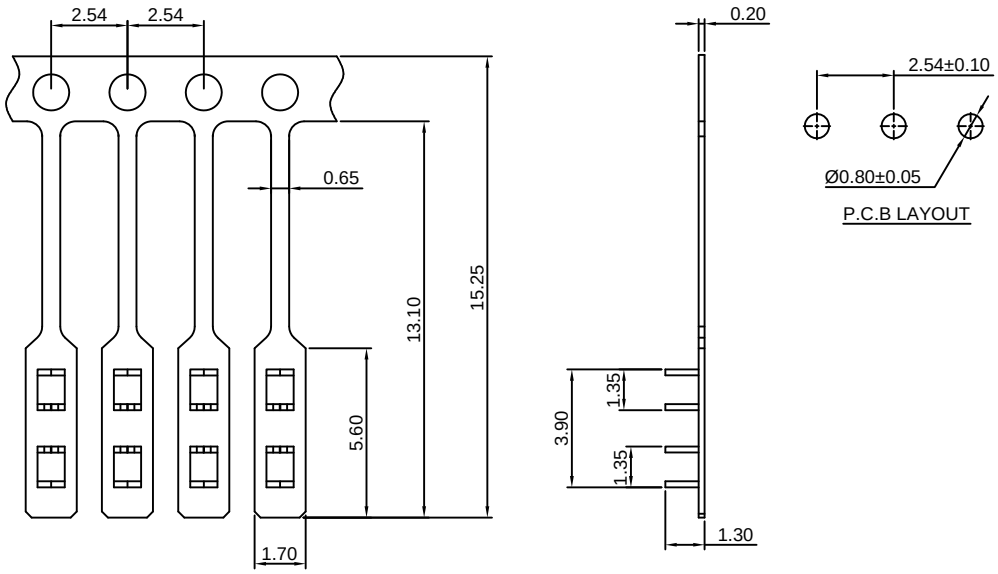


Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-F | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-F | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-G

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

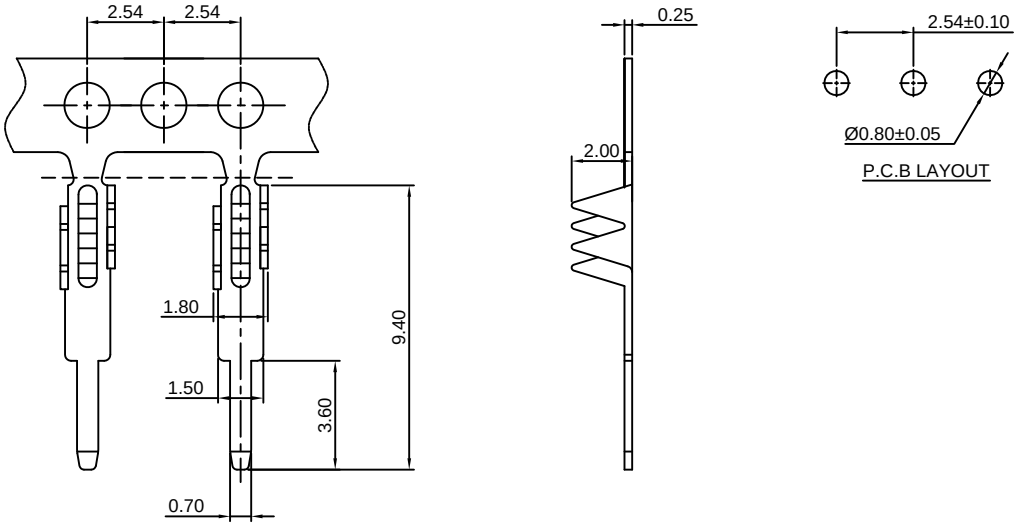


Ordering information & Specifications: Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-G | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-G | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550M-T-J

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

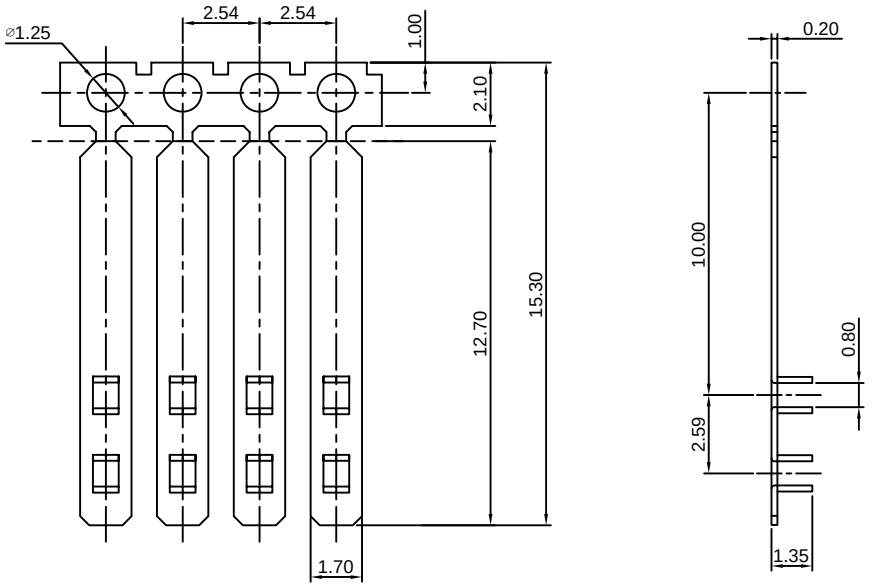


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-J | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-J | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

## A2550M-T-K

2.54mm pitch Crimp Flex Terminal

**Reference Informations:**
*Used in FFC Wire

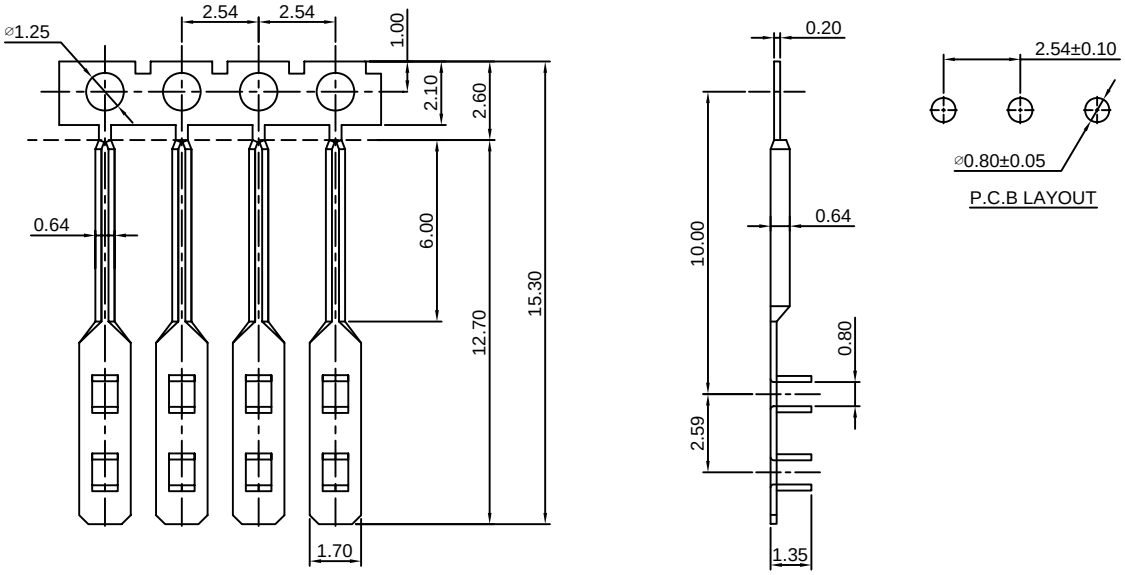


Ordering information & Specifications:

Unit:mm

| Part NO. | Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|---|---|---|---|---|---|
| A2550M-TP-K | FFC WIRE | -------- | Phosphor Bronze | Tin over Nickel | 20,000 PCS |
| A2550M-GP-K | FFC WIRE | -------- | Phosphor Bronze | Gold over Nickel | 20,000 PCS |

Optional Gold plating available but MOQ requested

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black




Ordering Information:
A2550H-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃




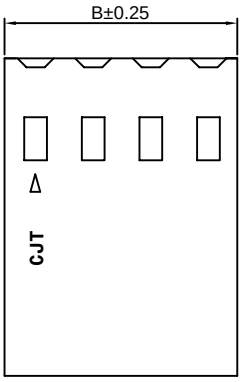


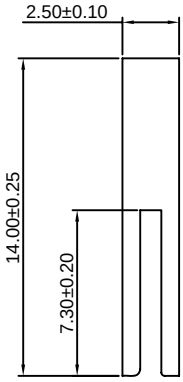


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 5.08 | 20P | 48.26 | 50.80 |
| 3P | 5.08 | 7.62 | 21P | 50.80 | 53.34 |
| 4P | 7.62 | 10.16 | 22P | 53.34 | 55.88 |
| 5P | 10.16 | 12.70 | 23P | 55.88 | 58.42 |
| 6P | 12.70 | 15.24 | 24P | 58.42 | 60.96 |
| 7P | 15.24 | 17.78 | 25P | 60.96 | 63.50 |
| 8P | 17.78 | 20.32 | 26P | 63.50 | 66.04 |
| 9P | 20.32 | 22.86 | 27P | 66.04 | 68.58 |
| 10P | 22.86 | 25.40 | 28P | 68.58 | 71.12 |
| 11P | 25.40 | 27.94 | 29P | 71.12 | 73.66 |
| 12P | 27.94 | 30.48 | 30P | 73.66 | 76.20 |
| 13P | 30.48 | 33.02 | 31P | 76.20 | 78.74 |
| 14P | 33.02 | 35.56 | 32P | 78.74 | 81.28 |
| 15P | 35.56 | 38.10 | 33P | 81.28 | 83.82 |
| 16P | 38.10 | 40.64 | 34P | 83.82 | 86.36 |
| 17P | 40.64 | 43.18 | 35P | 86.36 | 88.90 |
| 18P | 43.18 | 45.72 | 36P | 88.90 | 91.44 |
| 19P | 45.72 | 48.26 | | | |

Unit: mm

## A2550HH-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black




Ordering Information:
A2550HH-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃




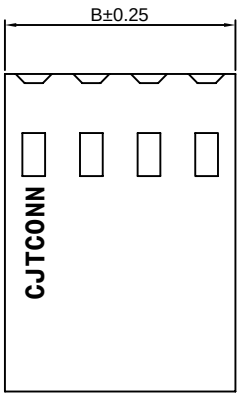


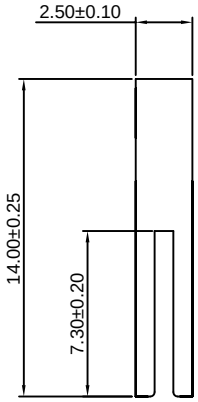




Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550HA-XP 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C,)
*Mates with CJT A2549WVB,WRB-XP series Wafer
*Color:Black

Ordering Information:
A2550HA-XP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

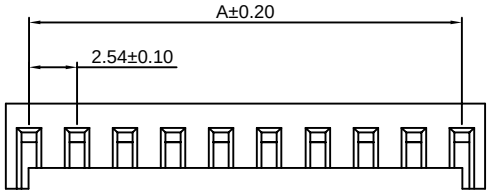





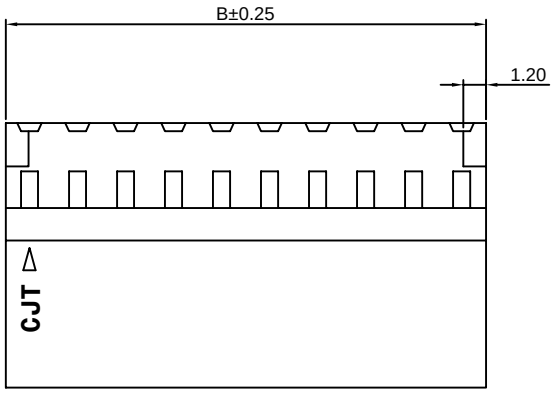


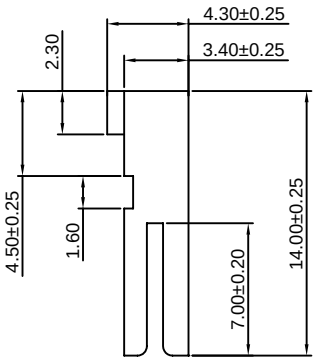


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550HB-XP 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C,)
*Mates with CJT A2549WVB,WRB-XP series Wafer
*Color:Black

Ordering Information:
A2550HB-XP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750°C

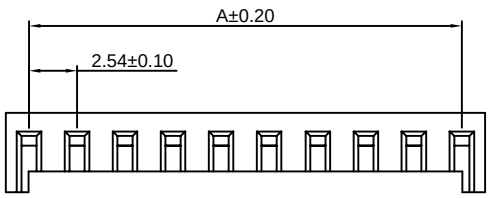





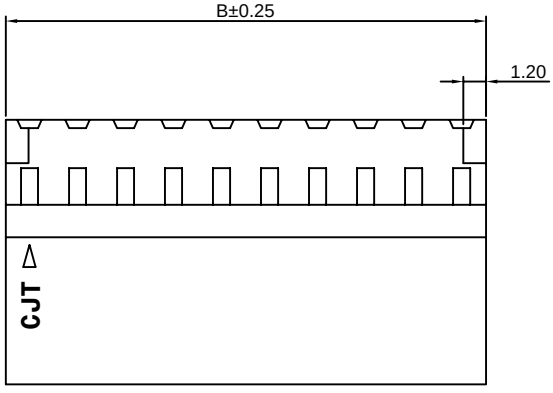


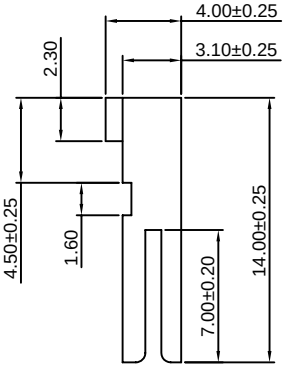


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-A — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP,A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-A - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃



4~25P


2P


3P

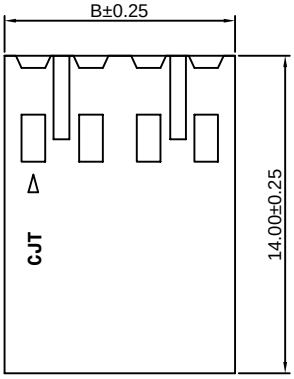


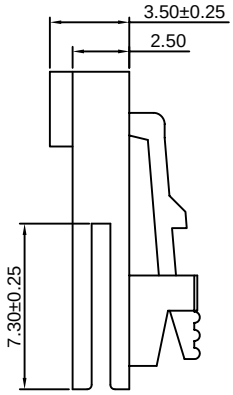





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-A1 — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP,A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-A1 - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

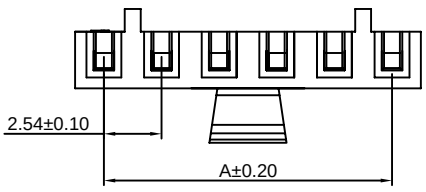

4~25P


2P


3P

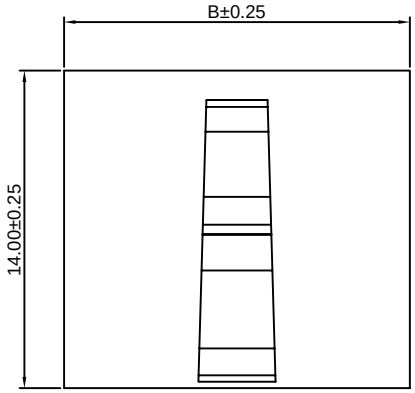


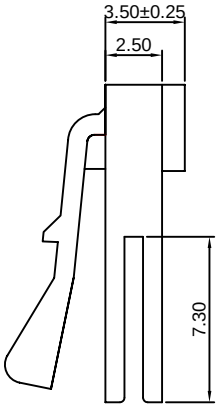





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-A2 — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP,A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-A2 - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

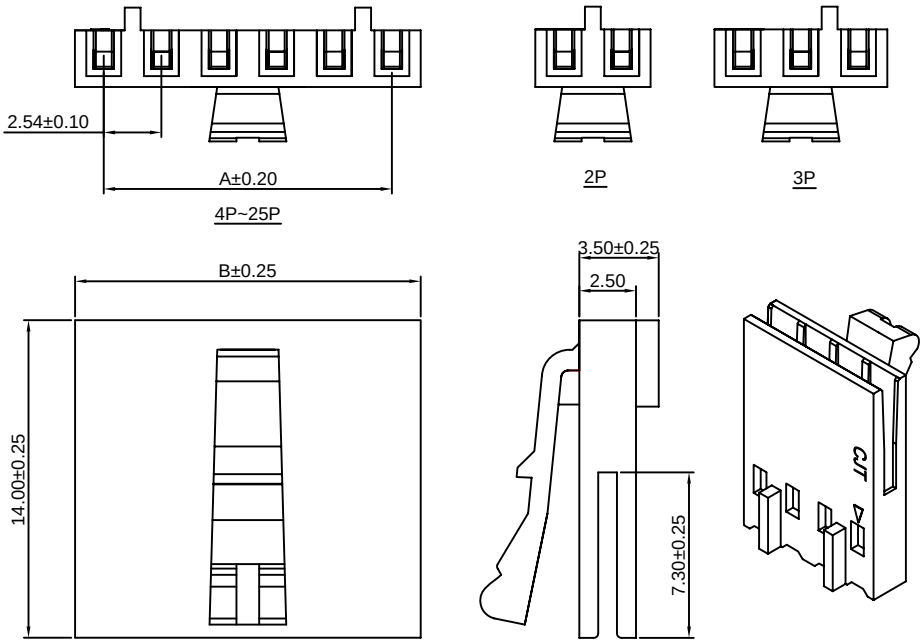


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-A2H — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP,A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-A2H - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

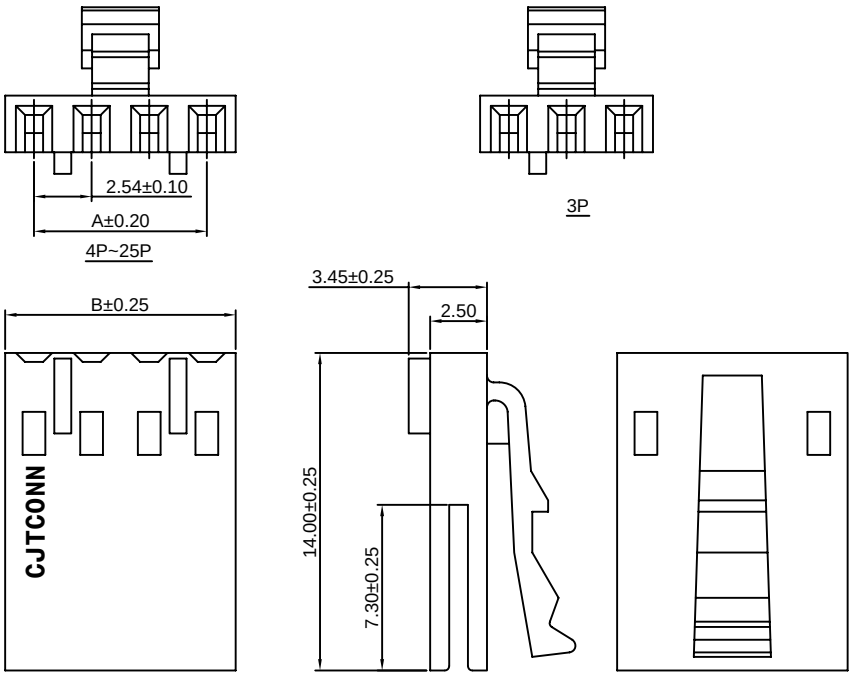


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-A3 — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material: PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP,A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black




4P~25P



3P

Ordering Information:
A2550H-XP-A3 - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

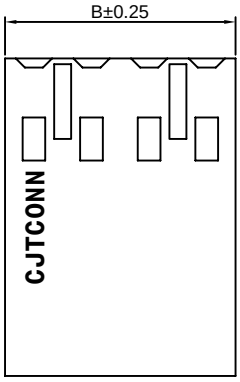


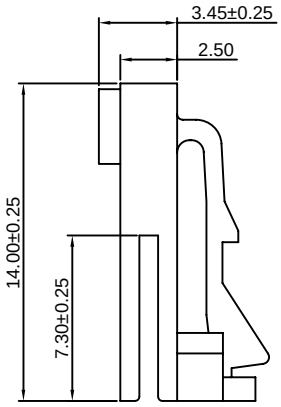


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-A3H — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2550HM-XP, A2547HM-XP series Housing or A2547WVA,WRA-XP series Wafer
*Color:Black




4P~25P

Ordering Information:
A2550H-XP-A3H - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃



3P

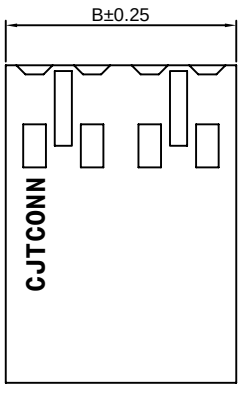


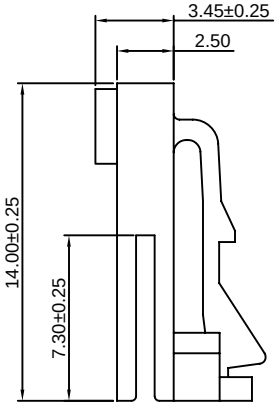




Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-B 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2547HMA-XP series Housing or A2547 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-B - *** (1 - 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

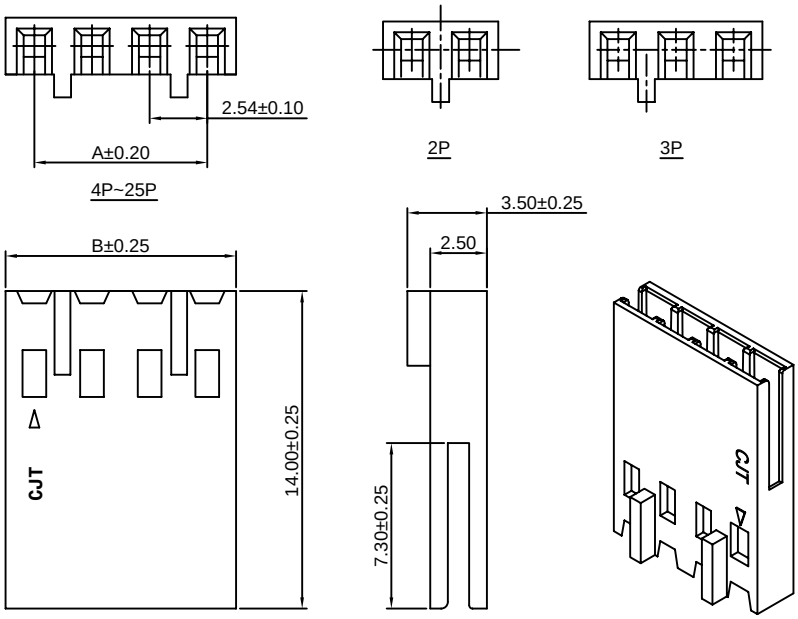


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-BH 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2547HMA-XP series Housing or A2547 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-BH - *** (1 - 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

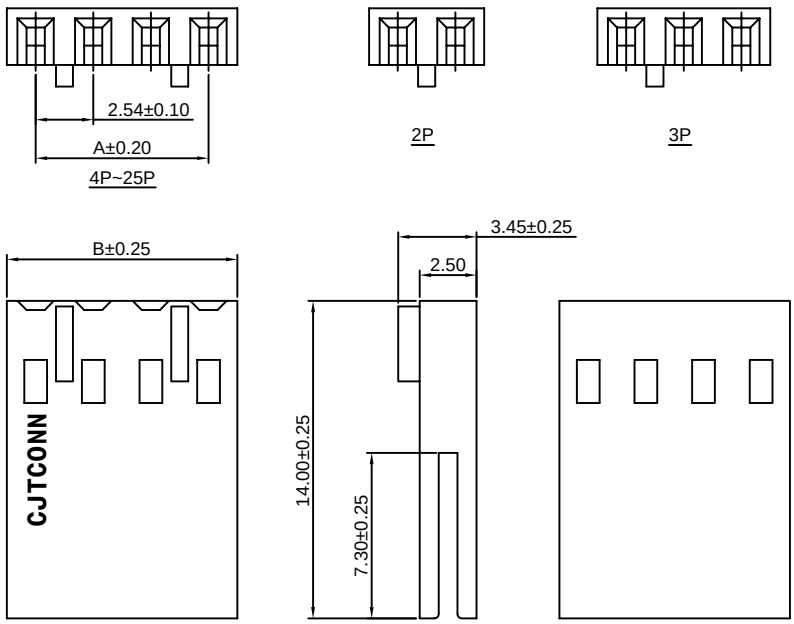


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-C

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR,A2550-T-A, A2550-T-C)
*Mates with CJT A2547WVE,WRE-XP,A2549WV,WR-XP series Wafer
*Color:Black




Ordering Information:
A2550H-XP-C - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃




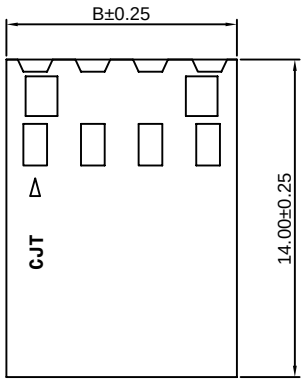


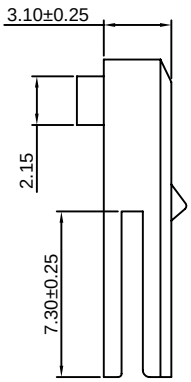


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-C1

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2547WVE,WRE-XP, A2549WV,WR-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-C1 - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

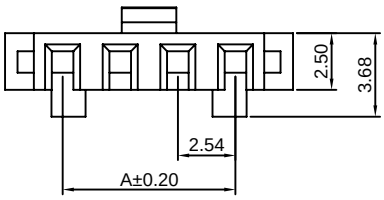




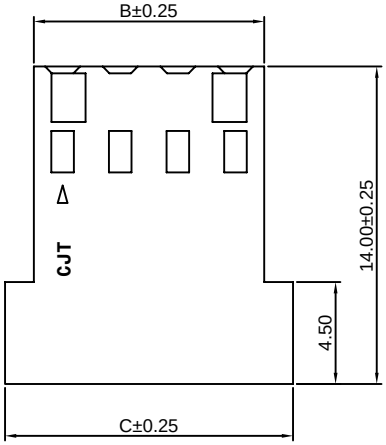


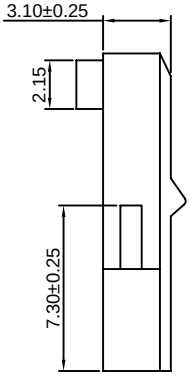


Ordering Information & Dimensions:

| PART NO. | Dimensions | | |
|---|---|---|---|
| | A | B | C |
| 2P | 2.54 | 5.08 | 7.62 |
| 3P | 5.08 | 7.62 | 10.16 |
| 4P | 7.62 | 10.16 | 12.70 |
| 5P | 10.16 | 12.70 | 15.24 |
| 6P | 12.70 | 15.24 | 17.78 |
| 7P | 15.24 | 17.78 | 20.32 |
| 8P | 17.78 | 20.32 | 22.86 |
| 9P | 20.32 | 22.86 | 25.40 |
| 10P | 22.86 | 25.40 | 27.94 |
| 11P | 25.40 | 27.94 | 30.48 |
| 12P | 27.94 | 30.48 | 33.02 |
| 13P | 30.48 | 33.02 | 35.56 |
| 14P | 33.02 | 35.56 | 38.10 |
| 15P | 35.56 | 38.10 | 40.64 |
| 16P | 38.10 | 40.64 | 43.18 |
| 17P | 40.64 | 43.18 | 45.72 |
| 18P | 43.18 | 45.72 | 48.26 |
| 19P | 45.72 | 48.26 | 50.80 |
| 20P | 48.26 | 50.80 | 53.34 |
| 21P | 50.80 | 53.34 | 55.88 |
| 22P | 53.34 | 55.88 | 58.42 |
| 23P | 55.88 | 58.42 | 60.96 |
| 24P | 58.42 | 60.96 | 63.50 |
| 25P | 60.96 | 63.50 | 66.04 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-CH 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H),
A2550-T(-H)-CR, A2550-T-A, A2550-T-C)
*Mates with CJT A2547WVE,WRE-XP,A2549WV,WR-XP series Wafer
*Color:Black

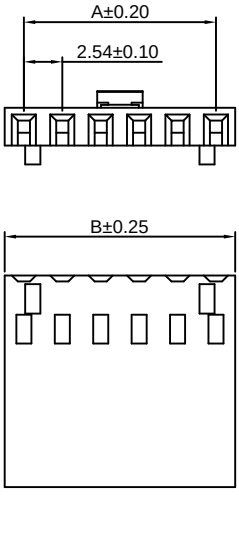


Ordering Information:
A2550H-XP-CH - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-D 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal(A2550-T(-H),
A2550-T(-H)-CR, A2550-T-A, A2550M-T, A2550-T-C)
*Mates with CJT A2541 series Wafer
*Color:Blue



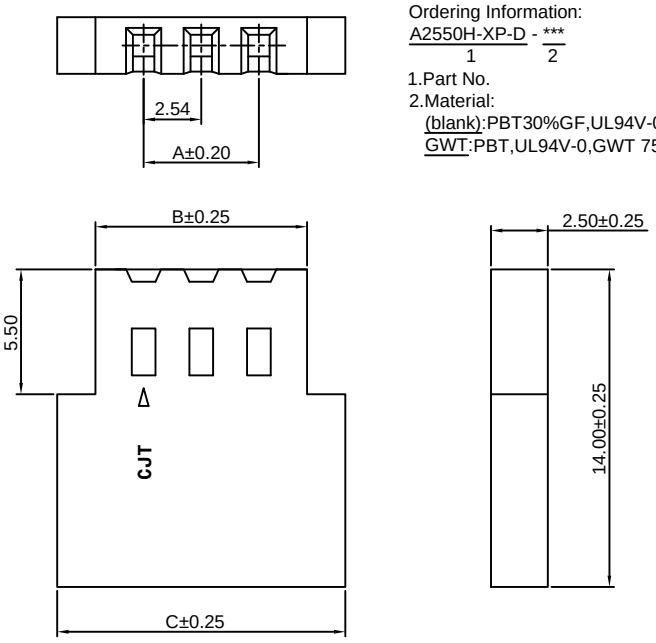


Ordering Information:
A2550H-XP-D - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

Ordering Information & Dimensions:

| PART NO. | Dimensions | | | PART NO. | Dimensions | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | | A | B | C |
| 2P | 2.54 | 6.81 | 10.16 | 20P | 48.26 | 52.53 | 55.88 |
| 3P | 5.08 | 9.35 | 12.70 | 21P | 50.80 | 55.07 | 58.42 |
| 4P | 7.62 | 11.89 | 15.24 | 22P | 53.34 | 57.61 | 60.96 |
| 5P | 10.16 | 14.43 | 17.78 | 23P | 55.88 | 60.15 | 63.50 |
| 6P | 12.70 | 16.97 | 20.32 | 24P | 58.42 | 62.69 | 66.04 |
| 7P | 15.24 | 19.51 | 22.86 | 25P | 60.96 | 65.23 | 68.58 |
| 8P | 17.78 | 22.05 | 25.40 | 26P | 63.50 | 67.77 | 71.12 |
| 9P | 20.32 | 24.59 | 27.94 | 27P | 66.04 | 70.31 | 73.66 |
| 10P | 22.86 | 27.13 | 30.48 | 28P | 68.58 | 72.85 | 76.20 |
| 11P | 25.40 | 29.67 | 33.02 | 29P | 71.12 | 75.39 | 78.74 |
| 12P | 27.94 | 32.21 | 35.56 | 30P | 73.66 | 77.93 | 81.28 |
| 13P | 30.48 | 34.75 | 38.10 | 31P | 76.20 | 80.47 | 83.82 |
| 14P | 33.02 | 37.29 | 40.64 | 32P | 78.74 | 83.01 | 86.36 |
| 15P | 35.56 | 39.83 | 43.18 | 33P | 81.28 | 85.55 | 88.90 |
| 16P | 38.10 | 42.37 | 45.72 | 34P | 83.82 | 88.09 | 91.44 |
| 17P | 40.64 | 44.91 | 48.26 | 35P | 86.36 | 90.63 | 93.98 |
| 18P | 43.18 | 47.45 | 50.80 | 36P | 88.90 | 93.17 | 96.52 |
| 19P | 45.72 | 49.99 | 53.34 | | | | |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-G — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2541 series Wafer
*Color:Black

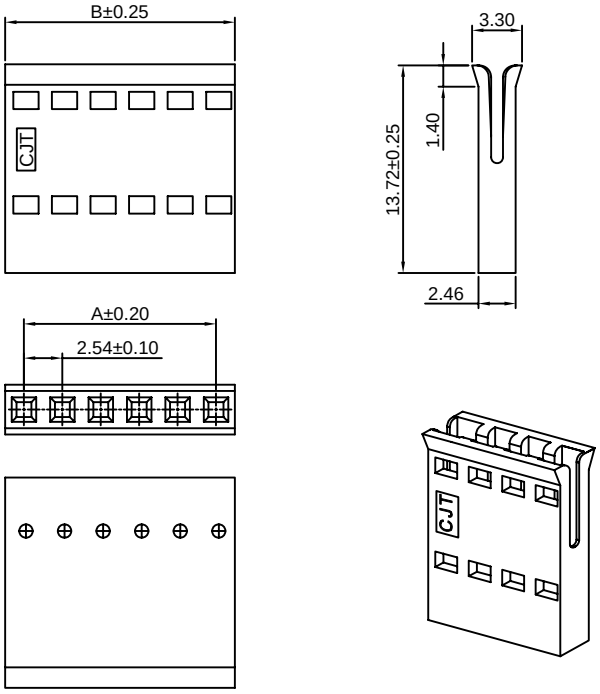


Ordering Information:
A2550H-XP-G - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 4.92 | 19P | 45.72 | 48.10 |
| 3P | 5.08 | 7.46 | 20P | 48.26 | 50.64 |
| 4P | 7.62 | 10.00 | 21P | 50.80 | 53.18 |
| 5P | 10.16 | 12.54 | 22P | 53.34 | 55.72 |
| 6P | 12.70 | 15.08 | 23P | 55.88 | 58.26 |
| 7P | 15.24 | 17.62 | 24P | 58.42 | 60.80 |
| 8P | 17.78 | 20.16 | 25P | 60.96 | 63.34 |
| 9P | 20.32 | 22.70 | 26P | 63.50 | 65.88 |
| 10P | 22.86 | 25.24 | 27P | 66.04 | 68.42 |
| 11P | 25.40 | 27.78 | 28P | 68.58 | 70.96 |
| 12P | 27.94 | 30.32 | 29P | 71.12 | 73.50 |
| 13P | 30.48 | 32.86 | 30P | 73.66 | 76.04 |
| 14P | 33.02 | 35.40 | 31P | 76.20 | 78.58 |
| 15P | 35.56 | 37.94 | 32P | 78.74 | 81.12 |
| 16P | 38.10 | 40.48 | 33P | 81.28 | 83.66 |
| 17P | 40.64 | 43.02 | 34P | 83.82 | 86.20 |
| 18P | 43.18 | 45.56 | | | |

Unit: mm

## A2550H-XP-G1 — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2541 series Wafer
*Color:Black

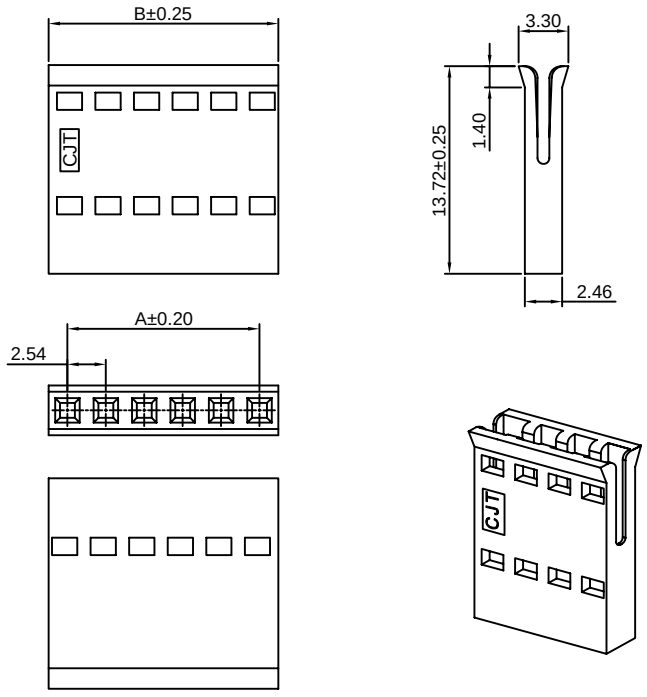


Ordering Information:
A2550H-XP-G1 - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750°C

Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 4.92 | 19P | 45.72 | 48.10 |
| 3P | 5.08 | 7.46 | 20P | 48.26 | 50.64 |
| 4P | 7.62 | 10.00 | 21P | 50.80 | 53.18 |
| 5P | 10.16 | 12.54 | 22P | 53.34 | 55.72 |
| 6P | 12.70 | 15.08 | 23P | 55.88 | 58.26 |
| 7P | 15.24 | 17.62 | 24P | 58.42 | 60.80 |
| 8P | 17.78 | 20.16 | 25P | 60.96 | 63.34 |
| 9P | 20.32 | 22.70 | 26P | 63.50 | 65.88 |
| 10P | 22.86 | 25.24 | 27P | 66.04 | 68.42 |
| 11P | 25.40 | 27.78 | 28P | 68.58 | 70.96 |
| 12P | 27.94 | 30.32 | 29P | 71.12 | 73.50 |
| 13P | 30.48 | 32.86 | 30P | 73.66 | 76.04 |
| 14P | 33.02 | 35.40 | 31P | 76.20 | 78.58 |
| 15P | 35.56 | 37.94 | 32P | 78.74 | 81.12 |
| 16P | 38.10 | 40.48 | 33P | 81.28 | 83.66 |
| 17P | 40.64 | 43.02 | 34P | 83.82 | 86.20 |
| 18P | 43.18 | 45.56 | | | |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-H — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2547 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-H - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750°C

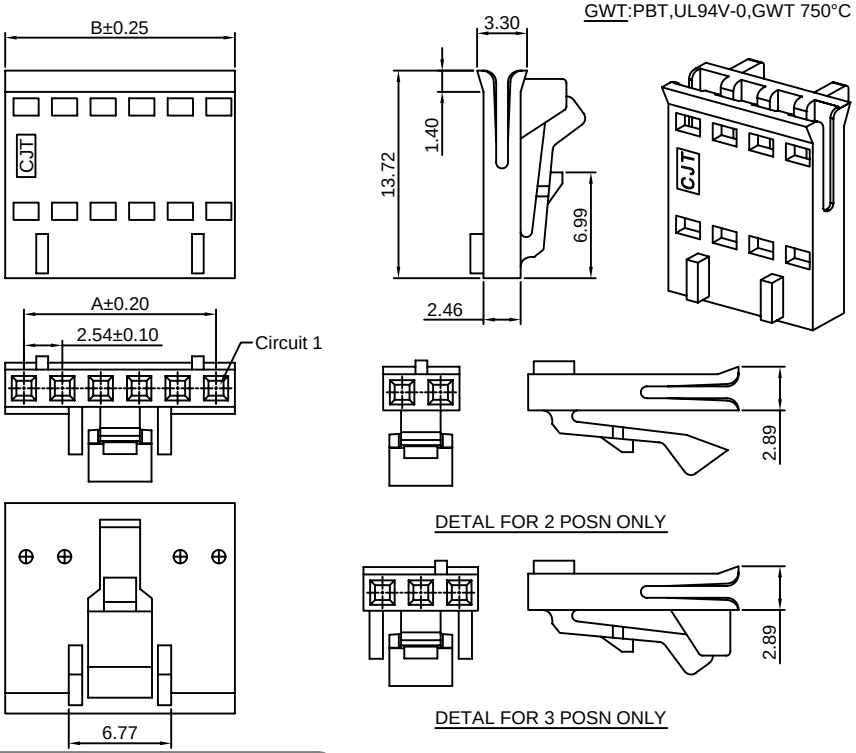


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 4.92 |
| 3P | 5.08 | 7.46 |
| 4P | 7.62 | 10.00 |
| 5P | 10.16 | 12.54 |
| 6P | 12.70 | 15.08 |
| 7P | 15.24 | 17.62 |
| 8P | 17.78 | 20.16 |
| 9P | 20.32 | 22.70 |
| 10P | 22.86 | 25.24 |
| 11P | 25.40 | 27.78 |
| 12P | 27.94 | 30.32 |
| 13P | 30.48 | 32.86 |
| 14P | 33.02 | 35.40 |
| 15P | 35.56 | 37.94 |
| 16P | 38.10 | 40.48 |
| 17P | 40.64 | 43.02 |
| 18P | 43.18 | 45.56 |
| 19P | 45.72 | 48.10 |
| 20P | 48.26 | 50.64 |
| 21P | 50.80 | 53.18 |
| 22P | 53.34 | 55.72 |
| 23P | 55.88 | 58.26 |
| 24P | 58.42 | 60.80 |
| 25P | 60.96 | 63.34 |

Unit: mm

## A2550H-XP-H1 — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2547 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-H1 - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

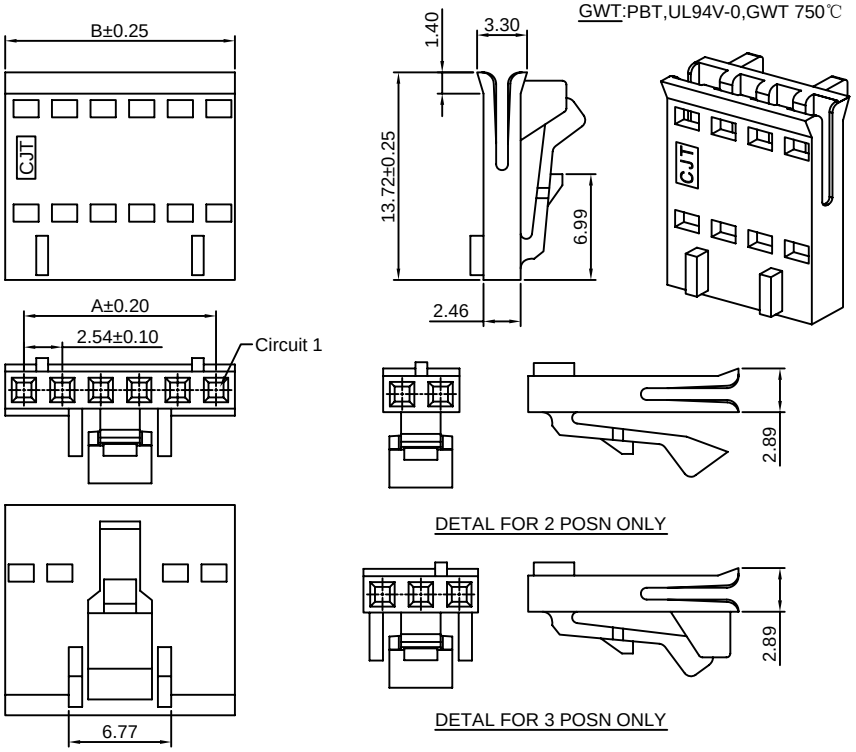


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 4.92 |
| 3P | 5.08 | 7.46 |
| 4P | 7.62 | 10.00 |
| 5P | 10.16 | 12.54 |
| 6P | 12.70 | 15.08 |
| 7P | 15.24 | 17.62 |
| 8P | 17.78 | 20.16 |
| 9P | 20.32 | 22.70 |
| 10P | 22.86 | 25.24 |
| 11P | 25.40 | 27.78 |
| 12P | 27.94 | 30.32 |
| 13P | 30.48 | 32.86 |
| 14P | 33.02 | 35.40 |
| 15P | 35.56 | 37.94 |
| 16P | 38.10 | 40.48 |
| 17P | 40.64 | 43.02 |
| 18P | 43.18 | 45.56 |
| 19P | 45.72 | 48.10 |
| 20P | 48.26 | 50.64 |
| 21P | 50.80 | 53.18 |
| 22P | 53.34 | 55.72 |
| 23P | 55.88 | 58.26 |
| 24P | 58.42 | 60.80 |
| 25P | 60.96 | 63.34 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-H2

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2547 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-H2 - *** 
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750°C

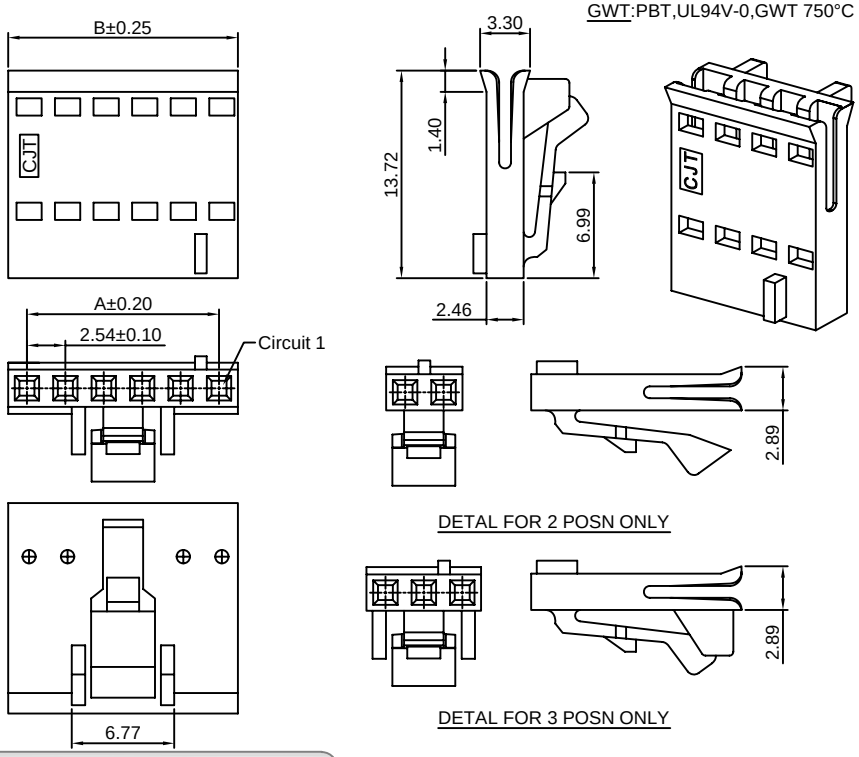


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 4.92 |
| 3P | 5.08 | 7.46 |
| 4P | 7.62 | 10.00 |
| 5P | 10.16 | 12.54 |
| 6P | 12.70 | 15.08 |
| 7P | 15.24 | 17.62 |
| 8P | 17.78 | 20.16 |
| 9P | 20.32 | 22.70 |
| 10P | 22.86 | 25.24 |
| 11P | 25.40 | 27.78 |
| 12P | 27.94 | 30.32 |
| 13P | 30.48 | 32.86 |
| 14P | 33.02 | 35.40 |
| 15P | 35.56 | 37.94 |
| 16P | 38.10 | 40.48 |
| 17P | 40.64 | 43.02 |
| 18P | 43.18 | 45.56 |
| 19P | 45.72 | 48.10 |
| 20P | 48.26 | 50.64 |
| 21P | 50.80 | 53.18 |
| 22P | 53.34 | 55.72 |
| 23P | 55.88 | 58.26 |
| 24P | 58.42 | 60.80 |
| 25P | 60.96 | 63.34 |

Unit: mm

## A2550H-XP-I

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2549 series Wafer
or A2547WVE,WRE-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-I - *** 
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

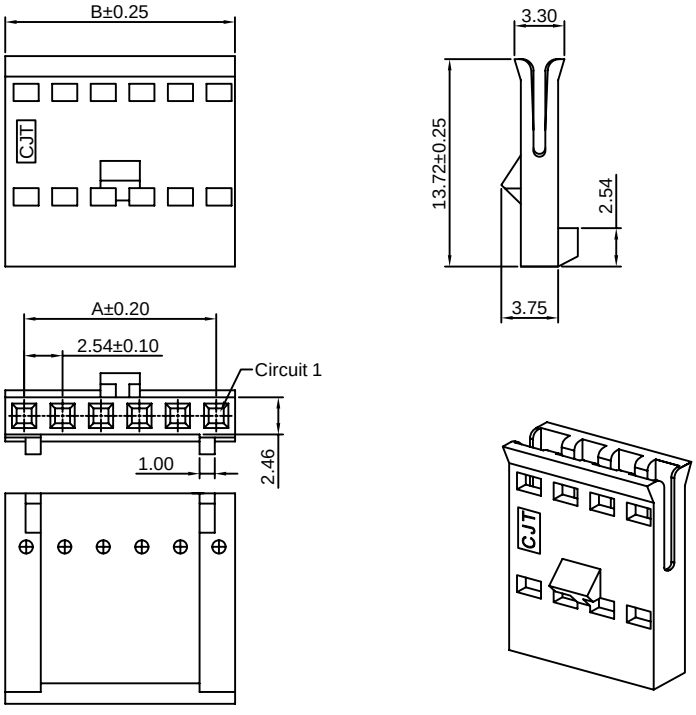


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 4.92 |
| 3P | 5.08 | 7.46 |
| 4P | 7.62 | 10.00 |
| 5P | 10.16 | 12.54 |
| 6P | 12.70 | 15.08 |
| 7P | 15.24 | 17.62 |
| 8P | 17.78 | 20.16 |
| 9P | 20.32 | 22.70 |
| 10P | 22.86 | 25.24 |
| 11P | 25.40 | 27.78 |
| 12P | 27.94 | 30.32 |
| 13P | 30.48 | 32.86 |
| 14P | 33.02 | 35.40 |
| 15P | 35.56 | 37.94 |
| 16P | 38.10 | 40.48 |
| 17P | 40.64 | 43.02 |
| 18P | 43.18 | 45.56 |
| 19P | 45.72 | 48.10 |
| 20P | 48.26 | 50.64 |
| 21P | 50.80 | 53.18 |
| 22P | 53.34 | 55.72 |
| 23P | 55.88 | 58.26 |
| 24P | 58.42 | 60.80 |
| 25P | 60.96 | 63.34 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-I1

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-J)
*Mates with CJT A2549 series Wafer
or A2547WVE,WRE-XP series Wafer
*Color:Black

Ordering Information:
A2550H-XP-I1 - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

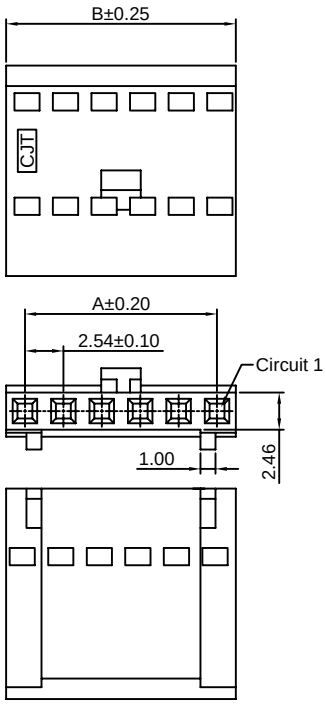








Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 4.92 |
| 3P | 5.08 | 7.46 |
| 4P | 7.62 | 10.00 |
| 5P | 10.16 | 12.54 |
| 6P | 12.70 | 15.08 |
| 7P | 15.24 | 17.62 |
| 8P | 17.78 | 20.16 |
| 9P | 20.32 | 22.70 |
| 10P | 22.86 | 25.24 |
| 11P | 25.40 | 27.78 |
| 12P | 27.94 | 30.32 |
| 13P | 30.48 | 32.86 |
| 14P | 33.02 | 35.40 |
| 15P | 35.56 | 37.94 |
| 16P | 38.10 | 40.48 |
| 17P | 40.64 | 43.02 |
| 18P | 43.18 | 45.56 |
| 19P | 45.72 | 48.10 |
| 20P | 48.26 | 50.64 |
| 21P | 50.80 | 53.18 |
| 22P | 53.34 | 55.72 |
| 23P | 55.88 | 58.26 |
| 24P | 58.42 | 60.80 |
| 25P | 60.96 | 63.34 |

Unit: mm

## A2550H-XP-J

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H),
A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black

Ordering Information:
A2550H-XP-J - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

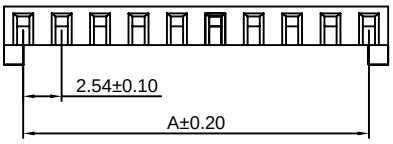





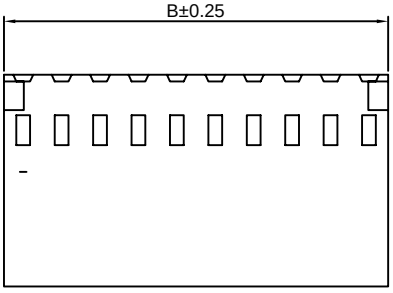





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550HD-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Mates with CJT A2541 series Wafer
*Used in FFC Wire
*Color:Blue

Ordering Information:
A2550HD-XP - *** - *
1 2 3
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel



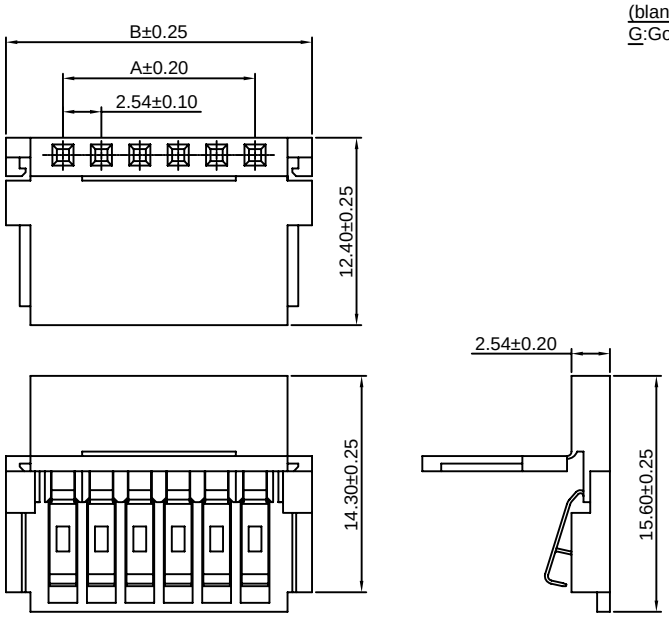


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 10.08 | 20P | 48.26 | 55.80 |
| 3P | 5.08 | 12.62 | 21P | 50.80 | 58.34 |
| 4P | 7.62 | 15.16 | 22P | 53.34 | 60.88 |
| 5P | 10.16 | 17.70 | 23P | 55.88 | 63.42 |
| 6P | 12.70 | 20.24 | 24P | 58.42 | 65.96 |
| 7P | 15.24 | 22.78 | 25P | 60.96 | 68.50 |
| 8P | 17.78 | 25.32 | 26P | 63.50 | 71.04 |
| 9P | 20.32 | 27.86 | 27P | 66.04 | 73.58 |
| 10P | 22.86 | 30.40 | 28P | 68.58 | 76.12 |
| 11P | 25.40 | 32.94 | 29P | 71.12 | 78.66 |
| 12P | 27.94 | 35.48 | 30P | 73.66 | 81.20 |
| 13P | 30.48 | 38.02 | 31P | 76.20 | 83.74 |
| 14P | 33.02 | 40.56 | 32P | 78.74 | 86.28 |
| 15P | 35.56 | 43.10 | 33P | 81.28 | 88.82 |
| 16P | 38.10 | 45.64 | 34P | 83.82 | 91.36 |
| 17P | 40.64 | 48.18 | 35P | 86.36 | 93.90 |
| 18P | 43.18 | 50.72 | 36P | 88.90 | 96.44 |
| 19P | 45.72 | 53.26 | | | |

Unit: mm

# A2550HDM-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Used in FFC Wire
*Color:Blue

Ordering Information:
A2550HDM-XP - *** - *
1 2 3
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel

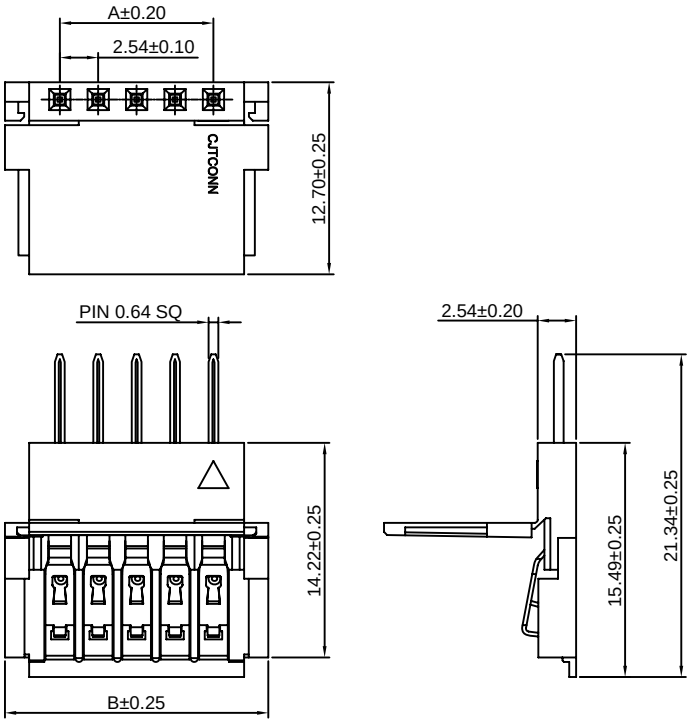


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 9.91 | 20P | 48.26 | 55.63 |
| 3P | 5.08 | 12.45 | 21P | 50.80 | 58.17 |
| 4P | 7.62 | 14.99 | 22P | 53.34 | 60.71 |
| 5P | 10.16 | 17.53 | 23P | 55.88 | 63.25 |
| 6P | 12.70 | 20.07 | 24P | 58.42 | 65.79 |
| 7P | 15.24 | 22.61 | 25P | 60.96 | 68.33 |
| 8P | 17.78 | 25.15 | 26P | 63.50 | 70.87 |
| 9P | 20.32 | 27.69 | 27P | 66.04 | 73.41 |
| 10P | 22.86 | 30.23 | 28P | 68.58 | 75.95 |
| 11P | 25.40 | 32.77 | 29P | 71.12 | 78.49 |
| 12P | 27.94 | 35.31 | 30P | 73.66 | 81.03 |
| 13P | 30.48 | 37.85 | 31P | 76.20 | 83.57 |
| 14P | 33.02 | 40.39 | 32P | 78.74 | 86.11 |
| 15P | 35.56 | 42.93 | 33P | 81.28 | 88.65 |
| 16P | 38.10 | 45.47 | 34P | 83.82 | 91.19 |
| 17P | 40.64 | 48.01 | 35P | 86.36 | 93.73 |
| 18P | 43.18 | 50.55 | 36P | 88.90 | 96.27 |
| 19P | 45.72 | 53.09 | | | |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550HE-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**

*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Mates with CJT A2541WV,WR-XP,
A2549WVB,WRB-XP series Wafer
*Used in FFC Wire
*Color:Blue

Ordering Information:
A2550HE-XP - *** - *
1 2 3
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel

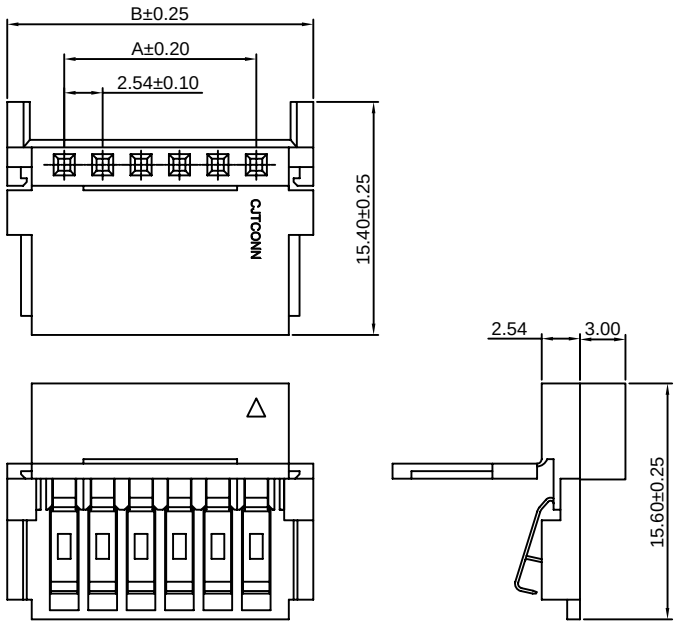


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 10.08 | 19P | 45.72 | 53.26 |
| 3P | 5.08 | 12.62 | 20P | 48.26 | 55.80 |
| 4P | 7.62 | 15.16 | 21P | 50.80 | 58.34 |
| 5P | 10.16 | 17.70 | 22P | 53.34 | 60.88 |
| 6P | 12.70 | 20.24 | 23P | 55.88 | 63.42 |
| 7P | 15.24 | 22.78 | 24P | 58.42 | 65.96 |
| 8P | 17.78 | 25.32 | 25P | 60.96 | 68.50 |
| 9P | 20.32 | 27.86 | 26P | 63.50 | 71.04 |
| 10P | 22.86 | 30.40 | 27P | 66.04 | 73.58 |
| 11P | 25.40 | 32.94 | 28P | 68.58 | 76.12 |
| 12P | 27.94 | 35.48 | 29P | 71.12 | 78.66 |
| 13P | 30.48 | 38.02 | 30P | 73.66 | 81.20 |
| 14P | 33.02 | 40.56 | 31P | 76.20 | 83.74 |
| 15P | 35.56 | 43.10 | 32P | 78.74 | 86.28 |
| 16P | 38.10 | 45.64 | 33P | 81.28 | 88.82 |
| 17P | 40.64 | 48.18 | 34P | 83.82 | 91.36 |
| 18P | 43.18 | 50.72 | | | |

Unit: mm

# A2550HF-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**

*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Mates with CJT A2547HM-XP, A2550HM-XP series
Housing or A2547WVA,WRA-XP series Wafer
*Used in FFC Wire
*Color:Blue

Ordering Information:
A2550HF-XP - *** - *
1 2 3
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel

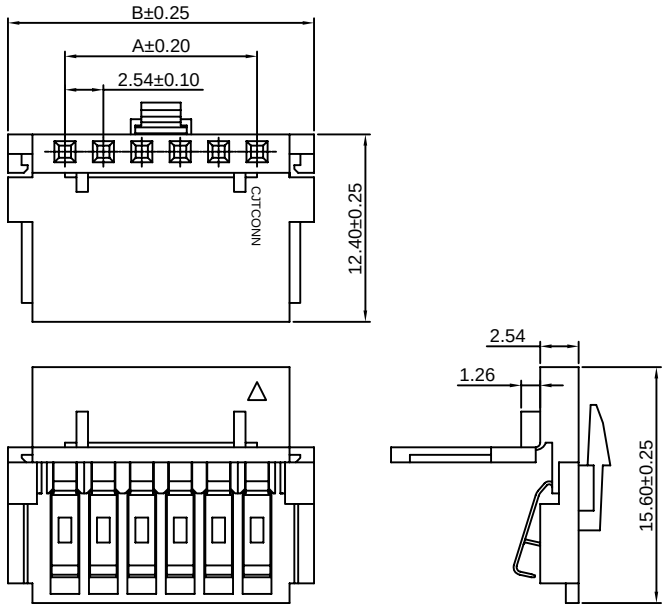


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 6P | 12.70 | 20.24 | 21P | 50.80 | 58.34 |
| 7P | 15.24 | 22.78 | 22P | 53.34 | 60.88 |
| 8P | 17.78 | 25.32 | 23P | 55.88 | 63.42 |
| 9P | 20.32 | 27.86 | 24P | 58.42 | 65.96 |
| 10P | 22.86 | 30.40 | 25P | 60.96 | 68.50 |
| 11P | 25.40 | 32.94 | 26P | 63.50 | 71.04 |
| 12P | 27.94 | 35.48 | 27P | 66.04 | 73.58 |
| 13P | 30.48 | 38.02 | 28P | 68.58 | 76.12 |
| 14P | 33.02 | 40.56 | 29P | 71.12 | 78.66 |
| 15P | 35.56 | 43.10 | 30P | 73.66 | 81.20 |
| 16P | 38.10 | 45.64 | 31P | 76.20 | 83.74 |
| 17P | 40.64 | 48.18 | 32P | 78.74 | 86.28 |
| 18P | 43.18 | 50.72 | 33P | 81.28 | 88.82 |
| 19P | 45.72 | 53.26 | 34P | 83.82 | 91.36 |
| 20P | 48.26 | 55.80 | | | |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550HG-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**

*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Mates with CJT A2547HM-XP, A2550HM,HMA-XP series Housing or A2547WVA,WRA-XP series Wafer
*Used in FFC Wire
*Color:Blue

Ordering Information:
A2550HG-XP - *** - *
1 2 3
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃
3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel

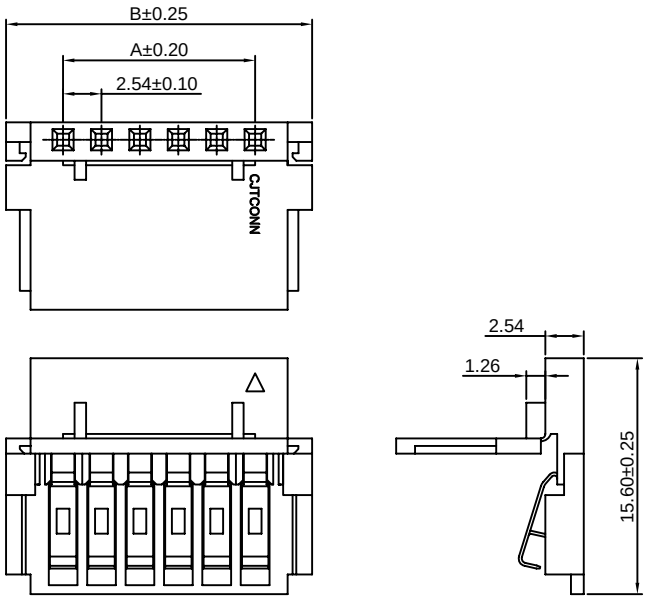


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 6P | 12.70 | 20.24 | 21P | 50.80 | 58.34 |
| 7P | 15.24 | 22.78 | 22P | 53.34 | 60.88 |
| 8P | 17.78 | 25.32 | 23P | 55.88 | 63.42 |
| 9P | 20.32 | 27.86 | 24P | 58.42 | 65.96 |
| 10P | 22.86 | 30.40 | 25P | 60.96 | 68.50 |
| 11P | 25.40 | 32.94 | 26P | 63.50 | 71.04 |
| 12P | 27.94 | 35.48 | 27P | 66.04 | 73.58 |
| 13P | 30.48 | 38.02 | 28P | 68.58 | 76.12 |
| 14P | 33.02 | 40.56 | 29P | 71.12 | 78.66 |
| 15P | 35.56 | 43.10 | 30P | 73.66 | 81.20 |
| 16P | 38.10 | 45.64 | 31P | 76.20 | 83.74 |
| 17P | 40.64 | 48.18 | 32P | 78.74 | 86.28 |
| 18P | 43.18 | 50.72 | 33P | 81.28 | 88.82 |
| 19P | 45.72 | 53.26 | 34P | 83.82 | 91.36 |
| 20P | 48.26 | 55.80 | | | |

Unit: mm

# A2550HK-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**

*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-K)
*Color:Blue

Ordering Information:
A2550HK-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃



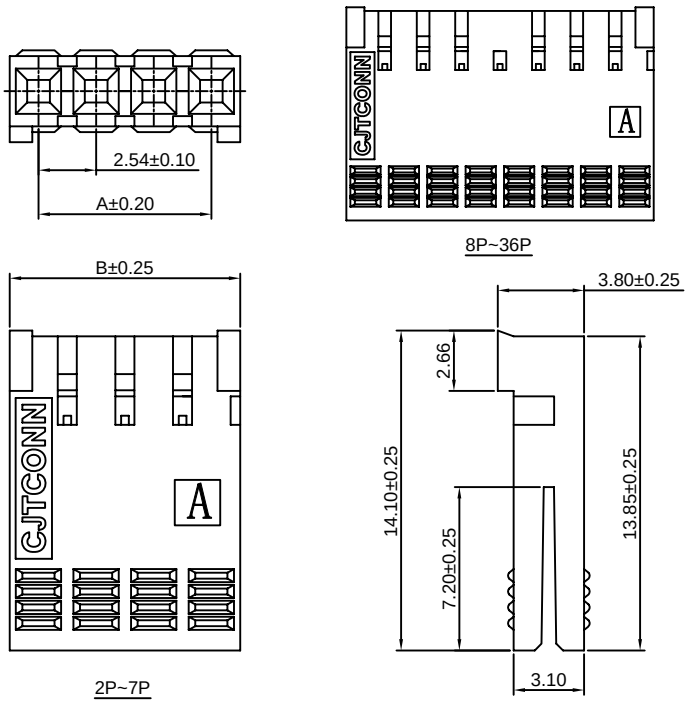


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 5.08 | 20P | 48.26 | 50.80 |
| 3P | 5.08 | 7.62 | 21P | 50.80 | 53.34 |
| 4P | 7.62 | 10.16 | 22P | 53.34 | 55.88 |
| 5P | 10.16 | 12.70 | 23P | 55.88 | 58.42 |
| 6P | 12.70 | 15.24 | 24P | 58.42 | 60.96 |
| 7P | 15.24 | 17.78 | 25P | 60.96 | 63.50 |
| 8P | 17.78 | 20.32 | 26P | 63.50 | 66.04 |
| 9P | 20.32 | 22.86 | 27P | 66.04 | 68.58 |
| 10P | 22.86 | 25.40 | 28P | 68.58 | 71.12 |
| 11P | 25.40 | 27.94 | 29P | 71.12 | 73.66 |
| 12P | 27.94 | 30.48 | 30P | 73.66 | 76.20 |
| 13P | 30.48 | 33.02 | 31P | 76.20 | 78.74 |
| 14P | 33.02 | 35.56 | 32P | 78.74 | 81.28 |
| 15P | 35.56 | 38.10 | 33P | 81.28 | 83.82 |
| 16P | 38.10 | 40.64 | 34P | 83.82 | 86.36 |
| 17P | 40.64 | 43.18 | 35P | 86.36 | 88.90 |
| 18P | 43.18 | 45.72 | 36P | 88.90 | 91.44 |
| 19P | 45.72 | 48.26 | | | |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550HL-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black

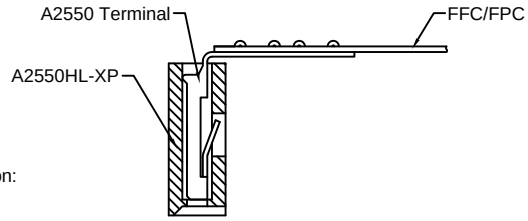







Ordering Information:
A2550HL-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃







Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2P | 2.54 | 5.08 | 20P | 48.26 | 50.80 |
| 3P | 5.08 | 7.62 | 21P | 50.80 | 53.34 |
| 4P | 7.62 | 10.16 | 22P | 53.34 | 55.88 |
| 5P | 10.16 | 12.70 | 23P | 55.88 | 58.42 |
| 6P | 12.70 | 15.24 | 24P | 58.42 | 60.96 |
| 7P | 15.24 | 17.78 | 25P | 60.96 | 63.50 |
| 8P | 17.78 | 20.32 | 26P | 63.50 | 66.04 |
| 9P | 20.32 | 22.86 | 27P | 66.04 | 68.58 |
| 10P | 22.86 | 25.40 | 28P | 68.58 | 71.12 |
| 11P | 25.40 | 27.94 | 29P | 71.12 | 73.66 |
| 12P | 27.94 | 30.48 | 30P | 73.66 | 76.20 |
| 13P | 30.48 | 33.02 | 31P | 76.20 | 78.74 |
| 14P | 33.02 | 35.56 | 32P | 78.74 | 81.28 |
| 15P | 35.56 | 38.10 | 33P | 81.28 | 83.82 |
| 16P | 38.10 | 40.64 | 34P | 83.82 | 86.36 |
| 17P | 40.64 | 43.18 | 35P | 86.36 | 88.90 |
| 18P | 43.18 | 45.72 | 36P | 88.90 | 91.44 |
| 19P | 45.72 | 48.26 | | | |

Unit: mm

# A2550H-XP-M

2.54mm Pitch Housing With Lock

**Reference Informations:**
*Material:PBT30%GF , UL94V-0
*Suitable CJT A2550-T-E series Terminal
*Mates with CJT A2547HM-XP A2550HM-XP series Housing or A2547 series single row Wafer
*Color:Black

Ordering Information:
A2550H-XP-M - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

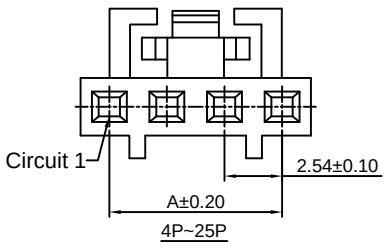








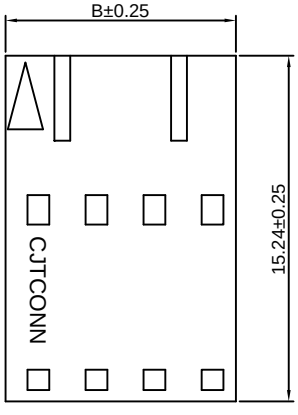


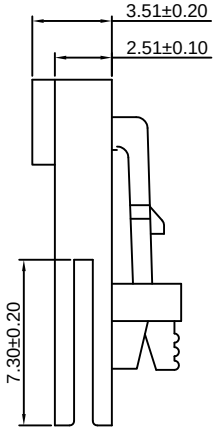





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-M1 2.54mm Pitch Housing

**Reference Informations:**
*Material:PBT30%GF , UL94V-0
*Suitable CJT A2550-T-E, A2550M-T-D series Terminal
*Mates with CJT A2547WV,WR-XP,
A2547WVA,WRA-XP series single row Wafer
*Color:Black

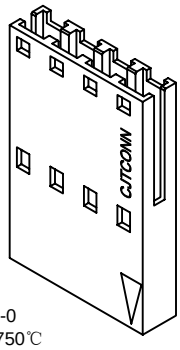


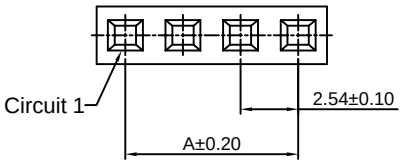


Ordering Information:
A2550H-XP-M1 - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

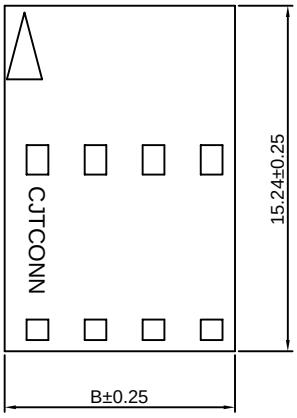


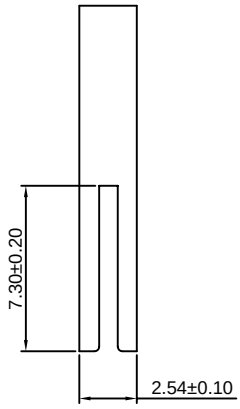


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-M2 2.54mm Pitch Housing

**Reference Informations:**
*Material:PBT30%GF , UL94V-0
*Suitable CJT A2550-T-E series Terminal
*Mates with CJT A2547WV,WR-XP,
A2547WVA,WRA-XP series single row Wafer
*Color:Black

Ordering Information:
A2550H-XP-M2 - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃










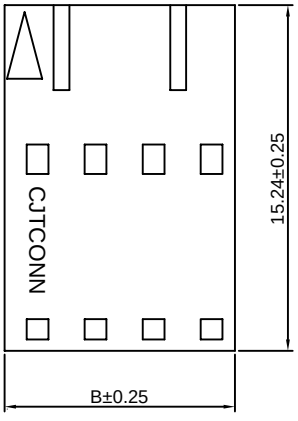


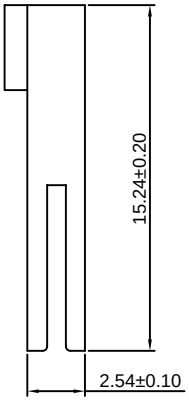





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550H-XP-M3 2.54mm Pitch Housing

**Reference Informations:**
*Material:PBT30%GF , UL94V-0
*Suitable CJT A2550-T-E,A2550M-T-D series Terminal
*Color:Black

Ordering Information:
A2550H-XP-M3 - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

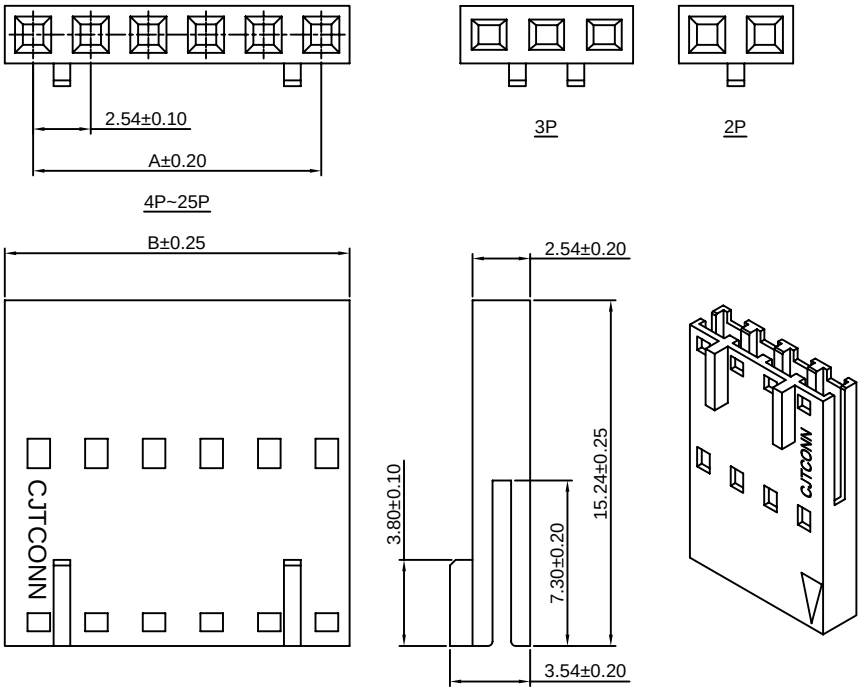


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550H-XP-MH 2.54mm Pitch Housing With Lock

**Reference Informations:**
*Material:PBT30%GF , UL94V-0
*Suitable CJT A2550-T-E series Terminal
*Mates with CJT A2547HM-XP A2550HM-XP series Housing or A2547 series single row Wafer
*Color:Black

Ordering Information:
A2550H-XP-MH - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

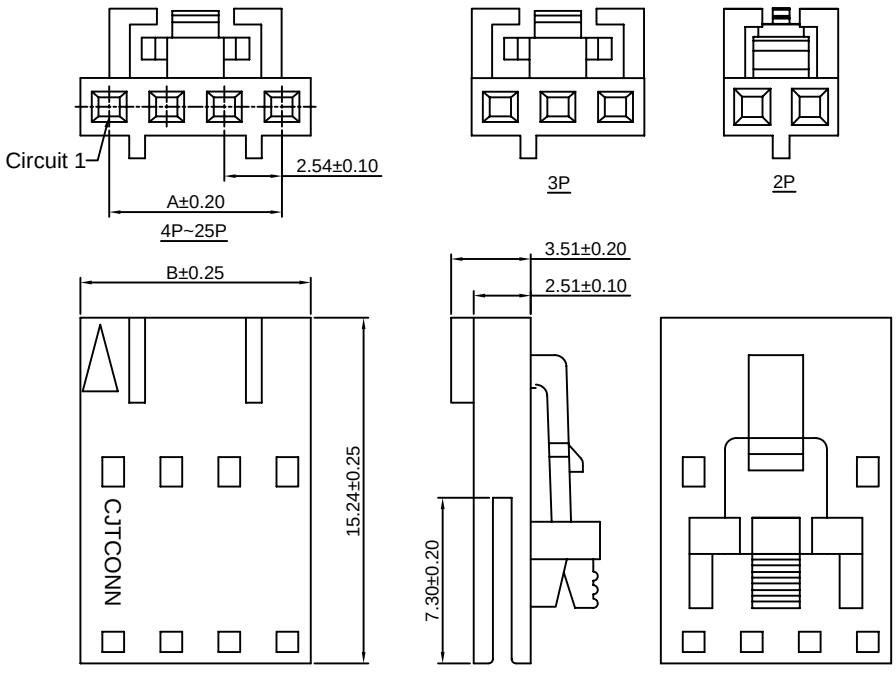


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550HH-N-XP 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR, A2550-T-A, A2550-T-C, A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black

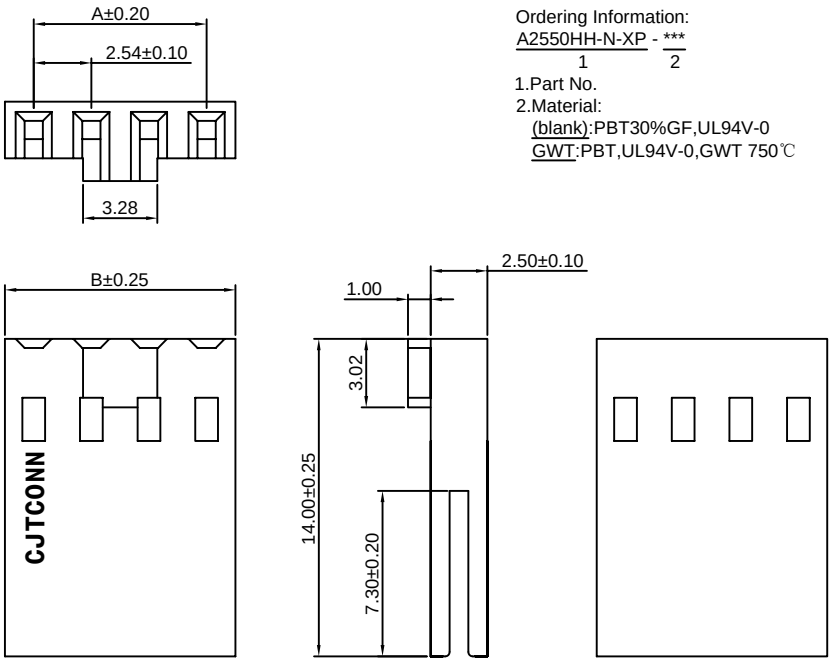


Ordering Information:
A2550HH-N-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 5.08 |
| 3P | 5.08 | 7.62 |
| 4P | 7.62 | 10.16 |
| 5P | 10.16 | 12.70 |
| 6P | 12.70 | 15.24 |
| 7P | 15.24 | 17.78 |
| 8P | 17.78 | 20.32 |
| 9P | 20.32 | 22.86 |
| 10P | 22.86 | 25.40 |
| 11P | 25.40 | 27.94 |
| 12P | 27.94 | 30.48 |
| 13P | 30.48 | 33.02 |
| 14P | 33.02 | 35.56 |
| 15P | 35.56 | 38.10 |
| 16P | 38.10 | 40.64 |
| 17P | 40.64 | 43.18 |
| 18P | 43.18 | 45.72 |
| 19P | 45.72 | 48.26 |
| 20P | 48.26 | 50.80 |
| 21P | 50.80 | 53.34 |
| 22P | 53.34 | 55.88 |
| 23P | 55.88 | 58.42 |
| 24P | 58.42 | 60.96 |
| 25P | 60.96 | 63.50 |

Unit: mm

## A2550HM-XP 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550M-T-D series Terminal
*Mates with CJT A2550 series Housing (A2550H-XP-A, A2550H-XP-A1,A2550H-XP-A2,A2550H-XP-H,A2547H,HA-XP)
*Color:Black

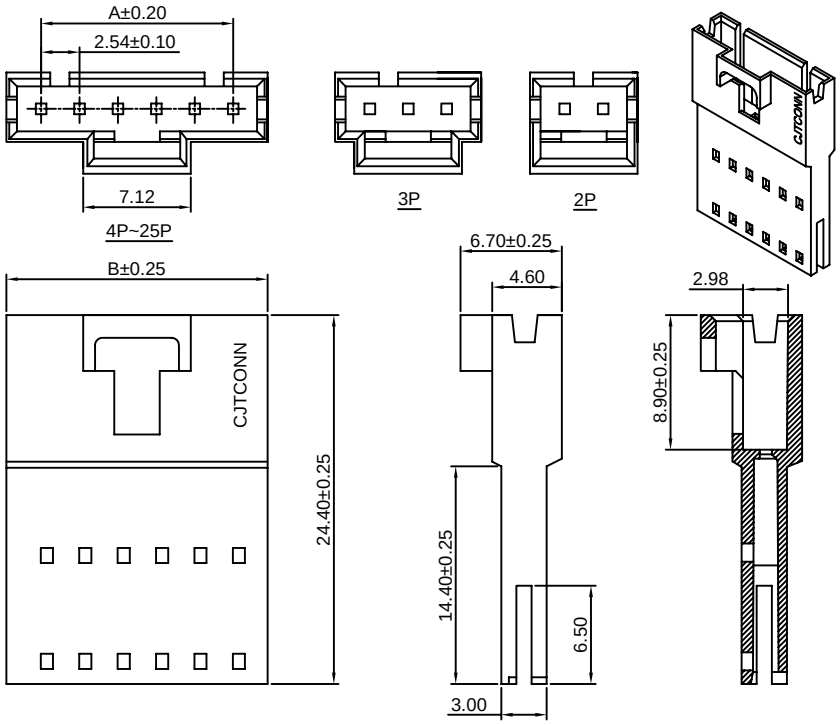


Ordering Information:
A2550HM-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 7.12 |
| 3P | 5.08 | 9.66 |
| 4P | 7.62 | 12.20 |
| 5P | 10.16 | 14.74 |
| 6P | 12.70 | 17.28 |
| 7P | 15.24 | 19.82 |
| 8P | 17.78 | 22.36 |
| 9P | 20.32 | 24.90 |
| 10P | 22.86 | 27.44 |
| 11P | 25.40 | 29.98 |
| 12P | 27.94 | 32.52 |
| 13P | 30.48 | 35.06 |
| 14P | 33.02 | 37.60 |
| 15P | 35.56 | 40.14 |
| 16P | 38.10 | 42.68 |
| 17P | 40.64 | 45.22 |
| 18P | 43.18 | 47.76 |
| 19P | 45.72 | 50.30 |
| 20P | 48.26 | 52.84 |
| 21P | 50.80 | 55.38 |
| 22P | 53.34 | 57.92 |
| 23P | 55.88 | 60.46 |
| 24P | 58.42 | 63.00 |
| 25P | 60.96 | 65.54 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



# A2550HMA-XP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550M-T-D series Terminal
*Mates with CJT A2550H-XP-B,
A2547H-XP-3 series Housing
*Color:Black

Ordering Information:
A2550HMA-XP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

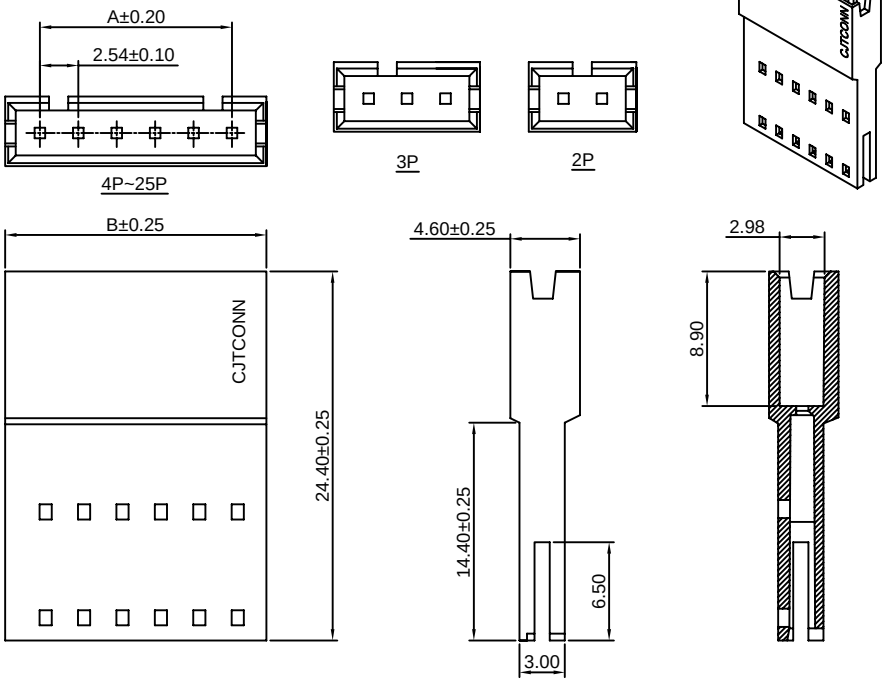


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2P | 2.54 | 7.12 |
| 3P | 5.08 | 9.66 |
| 4P | 7.62 | 12.20 |
| 5P | 10.16 | 14.74 |
| 6P | 12.70 | 17.28 |
| 7P | 15.24 | 19.82 |
| 8P | 17.78 | 22.36 |
| 9P | 20.32 | 24.90 |
| 10P | 22.86 | 27.44 |
| 11P | 25.40 | 29.98 |
| 12P | 27.94 | 32.52 |
| 13P | 30.48 | 35.06 |
| 14P | 33.02 | 37.60 |
| 15P | 35.56 | 40.14 |
| 16P | 38.10 | 42.68 |
| 17P | 40.64 | 45.22 |
| 18P | 43.18 | 47.76 |
| 19P | 45.72 | 50.30 |
| 20P | 48.26 | 52.84 |
| 21P | 50.80 | 55.38 |
| 22P | 53.34 | 57.92 |
| 23P | 55.88 | 60.46 |
| 24P | 58.42 | 63.00 |
| 25P | 60.96 | 65.54 |

Unit: mm

# A2550H-2xXP

2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H),
A2550-T(-H)-CR,A2550-T-A,A2550-T-C,A2550M-T)
*Mates with CJT A2541 series Wafer
*Color:Black

Ordering Information:
A2550H-2xXP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

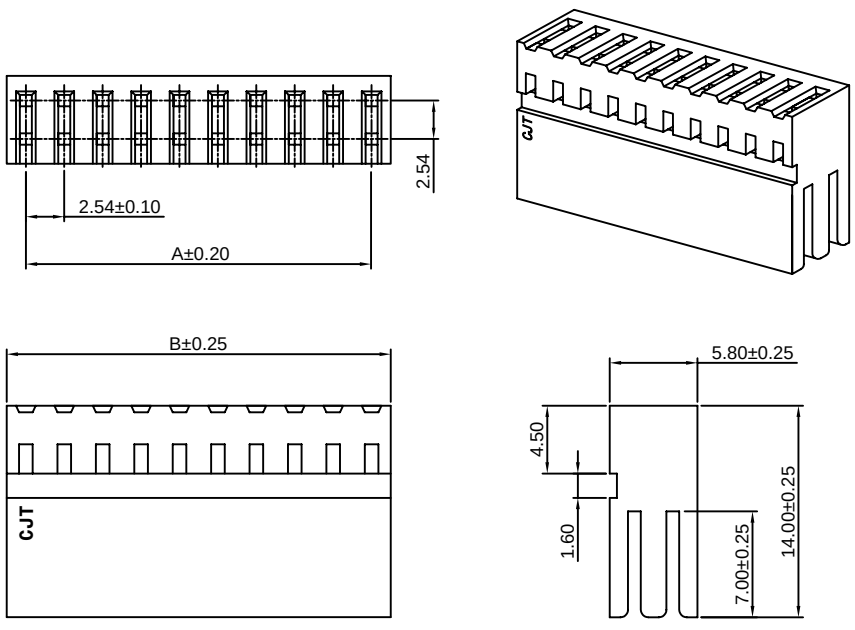


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2x2P | 2.54 | 5.08 |
| 2x3P | 5.08 | 7.62 |
| 2x4P | 7.62 | 10.16 |
| 2x5P | 10.16 | 12.70 |
| 2x6P | 12.70 | 15.24 |
| 2x7P | 15.24 | 17.78 |
| 2x8P | 17.78 | 20.32 |
| 2x9P | 20.32 | 22.86 |
| 2x10P | 22.86 | 25.40 |
| 2x11P | 25.40 | 27.94 |
| 2x12P | 27.94 | 30.48 |
| 2x13P | 30.48 | 33.02 |
| 2x14P | 33.02 | 35.56 |
| 2x15P | 35.56 | 38.10 |
| 2x16P | 38.10 | 40.64 |
| 2x17P | 40.64 | 43.18 |
| 2x18P | 43.18 | 45.72 |
| 2x19P | 45.72 | 48.26 |
| 2x20P | 48.26 | 50.80 |
| 2x21P | 50.80 | 53.34 |
| 2x22P | 53.34 | 55.88 |
| 2x23P | 55.88 | 58.42 |
| 2x24P | 58.42 | 60.96 |
| 2x25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550HA-2xXP — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR,A2550-T-A,A2550-T-C)
*Mates with CJT A2549WVB,WRB-2xXP series Dual Row Wafer
*Color:Black

Ordering Information:
A2550HA-2xXP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

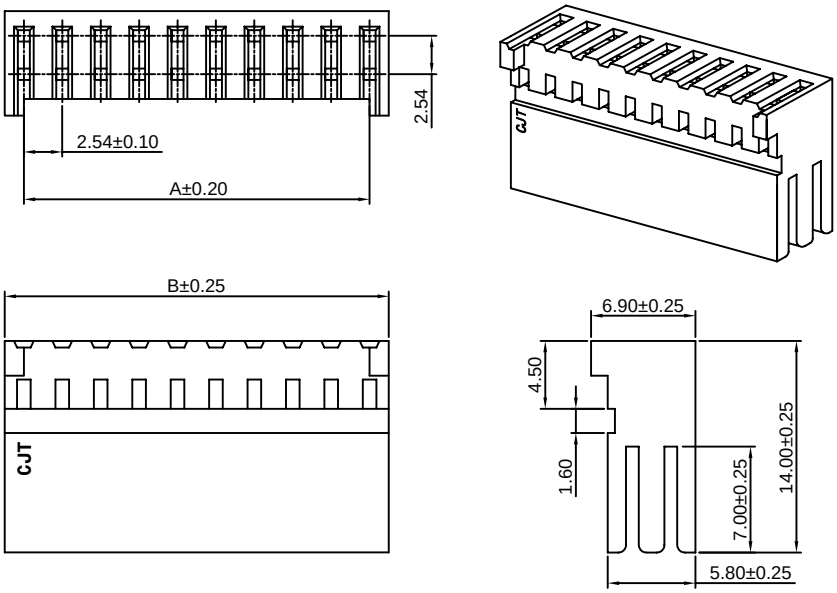


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2x2P | 2.54 | 5.08 |
| 2x3P | 5.08 | 7.62 |
| 2x4P | 7.62 | 10.16 |
| 2x5P | 10.16 | 12.70 |
| 2x6P | 12.70 | 15.24 |
| 2x7P | 15.24 | 17.78 |
| 2x8P | 17.78 | 20.32 |
| 2x9P | 20.32 | 22.86 |
| 2x10P | 22.86 | 25.40 |
| 2x11P | 25.40 | 27.94 |
| 2x12P | 27.94 | 30.48 |
| 2x13P | 30.48 | 33.02 |
| 2x14P | 33.02 | 35.56 |
| 2x15P | 35.56 | 38.10 |
| 2x16P | 38.10 | 40.64 |
| 2x17P | 40.64 | 43.18 |
| 2x18P | 43.18 | 45.72 |
| 2x19P | 45.72 | 48.26 |
| 2x20P | 48.26 | 50.80 |
| 2x21P | 50.80 | 53.34 |
| 2x22P | 53.34 | 55.88 |
| 2x23P | 55.88 | 58.42 |
| 2x24P | 58.42 | 60.96 |
| 2x25P | 60.96 | 63.50 |

Unit: mm

## A2550H-N-2xXP — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T(-H), A2550-T(-H)-CR,A2550-T-A,A2550-T-C,A2550M-T)
*Mates with CJT A2541 series Wafer or A2547WV,WR-2xXP series Wafer
*Color:Black

Ordering Information:
A2550H-N-2xXP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

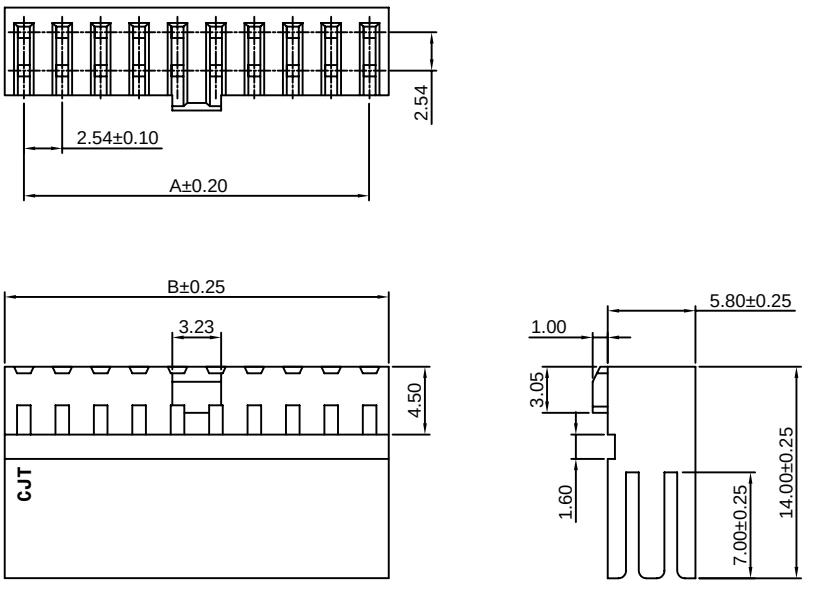


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 2x2P | 2.54 | 5.08 |
| 2x3P | 5.08 | 7.62 |
| 2x4P | 7.62 | 10.16 |
| 2x5P | 10.16 | 12.70 |
| 2x6P | 12.70 | 15.24 |
| 2x7P | 15.24 | 17.78 |
| 2x8P | 17.78 | 20.32 |
| 2x9P | 20.32 | 22.86 |
| 2x10P | 22.86 | 25.40 |
| 2x11P | 25.40 | 27.94 |
| 2x12P | 27.94 | 30.48 |
| 2x13P | 30.48 | 33.02 |
| 2x14P | 33.02 | 35.56 |
| 2x15P | 35.56 | 38.10 |
| 2x16P | 38.10 | 40.64 |
| 2x17P | 40.64 | 43.18 |
| 2x18P | 43.18 | 45.72 |
| 2x19P | 45.72 | 48.26 |
| 2x20P | 48.26 | 50.80 |
| 2x21P | 50.80 | 53.34 |
| 2x22P | 53.34 | 55.88 |
| 2x23P | 55.88 | 58.42 |
| 2x24P | 58.42 | 60.96 |
| 2x25P | 60.96 | 63.50 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550HK-2xXP — 2.54mm Pitch Crimp Flex Housing

**Reference Informations:**
*Material:PBT30%GF,UL94V-0
*Suitable CJT A2550 series Terminal (A2550-T-K)
*Color:Blue

Ordering Information:
A2550HK-2xXP - ***
1 2
1.Part No.
2.Material:
(blank):PBT30%GF,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃









2x8P~2x36P

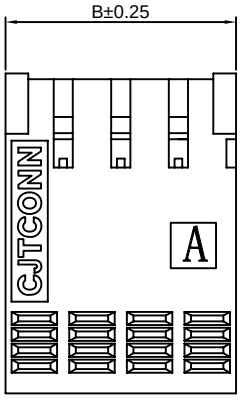


2x2P~2x7P

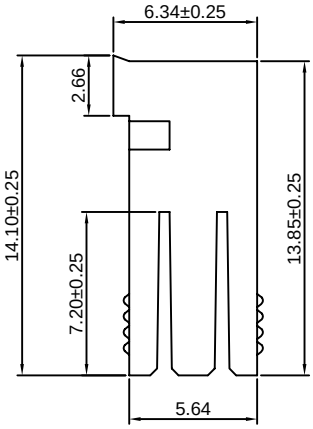


Ordering Information & Dimensions:

| PART NO. | Dimensions | | PART NO. | Dimensions | |
|---|---|---|---|---|---|
| | A | B | | A | B |
| 2x2P | 2.54 | 5.08 | 2x20P | 48.26 | 50.80 |
| 2x3P | 5.08 | 7.62 | 2x21P | 50.80 | 53.34 |
| 2x4P | 7.62 | 10.16 | 2x22P | 53.34 | 55.88 |
| 2x5P | 10.16 | 12.70 | 2x23P | 55.88 | 58.42 |
| 2x6P | 12.70 | 15.24 | 2x24P | 58.42 | 60.96 |
| 2x7P | 15.24 | 17.78 | 2x25P | 60.96 | 63.50 |
| 2x8P | 17.78 | 20.32 | 2x26P | 63.50 | 66.04 |
| 2x9P | 20.32 | 22.86 | 2x27P | 66.04 | 68.58 |
| 2x10P | 22.86 | 25.40 | 2x28P | 68.58 | 71.12 |
| 2x11P | 25.40 | 27.94 | 2x29P | 71.12 | 73.66 |
| 2x12P | 27.94 | 30.48 | 2x30P | 73.66 | 76.20 |
| 2x13P | 30.48 | 33.02 | 2x31P | 76.20 | 78.74 |
| 2x14P | 33.02 | 35.56 | 2x32P | 78.74 | 81.28 |
| 2x15P | 35.56 | 38.10 | 2x33P | 81.28 | 83.82 |
| 2x16P | 38.10 | 40.64 | 2x34P | 83.82 | 86.36 |
| 2x17P | 40.64 | 43.18 | 2x35P | 86.36 | 88.90 |
| 2x18P | 43.18 | 45.72 | 2x36P | 88.90 | 91.44 |
| 2x19P | 45.72 | 48.26 | | | |

Unit: mm

## A2550WVF-XP — 2.54mm Pitch Crimp Flex Wafer

**Reference Informations:**
*Material:PBT,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Color:Black

Ordering Information:
A2550WVF-XP - ***
1 2
1.Part No.
2.Material:
(blank):PBT,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃






P.C.B LAYOUT

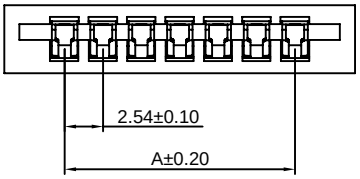





FPC/FFC T=0.30

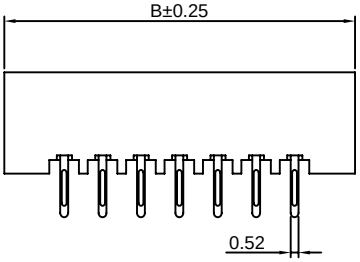





Ordering Information & Dimensions:

| PART NO. | Dimensions | | |
|---|---|---|---|
| | A | B | C |
| 3P | 5.08 | 13.04 | 10.16 |
| 4P | 7.62 | 15.58 | 12.70 |
| 5P | 10.16 | 18.12 | 15.24 |
| 6P | 12.70 | 20.66 | 17.78 |
| 7P | 15.24 | 23.20 | 20.32 |
| 8P | 17.78 | 25.74 | 22.86 |
| 9P | 20.32 | 28.28 | 25.40 |
| 10P | 22.86 | 30.82 | 27.94 |
| 11P | 25.40 | 33.36 | 30.48 |
| 12P | 27.94 | 35.90 | 33.02 |
| 13P | 30.48 | 38.44 | 35.56 |
| 14P | 33.02 | 40.98 | 38.10 |
| 15P | 35.56 | 43.52 | 40.64 |
| 16P | 38.10 | 46.06 | 43.18 |
| 17P | 40.64 | 48.60 | 45.72 |
| 18P | 43.18 | 51.14 | 48.26 |
| 19P | 45.72 | 53.68 | 50.80 |
| 20P | 48.26 | 56.22 | 53.34 |
| 21P | 50.80 | 58.76 | 55.88 |
| 22P | 53.34 | 61.30 | 58.42 |
| 23P | 55.88 | 63.84 | 60.96 |
| 24P | 58.42 | 66.38 | 63.50 |
| 25P | 60.96 | 68.92 | 66.04 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550WRF-XP 2.54mm Pitch Crimp Flex Wafer

**Reference Informations:**
*Material:PBT,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Color:Black

Ordering Information:
A2550WRF-XP - *** (1 / 2)
1.Part No.
2.Material:
(blank):PBT,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃











P.C.B LAYOUT

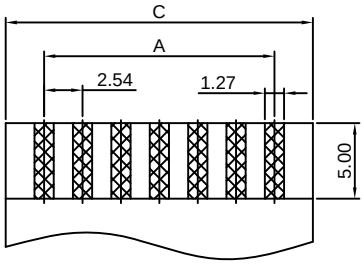

FPC/FFC T=0.30




Ordering Information & Dimensions:

| PART NO. | Dimensions | | |
|---|---|---|---|
| | A | B | C |
| 3P | 5.08 | 13.04 | 10.16 |
| 4P | 7.62 | 15.58 | 12.70 |
| 5P | 10.16 | 18.12 | 15.24 |
| 6P | 12.70 | 20.66 | 17.78 |
| 7P | 15.24 | 23.20 | 20.32 |
| 8P | 17.78 | 25.74 | 22.86 |
| 9P | 20.32 | 28.28 | 25.40 |
| 10P | 22.86 | 30.82 | 27.94 |
| 11P | 25.40 | 33.36 | 30.48 |
| 12P | 27.94 | 35.90 | 33.02 |
| 13P | 30.48 | 38.44 | 35.56 |
| 14P | 33.02 | 40.98 | 38.10 |
| 15P | 35.56 | 43.52 | 40.64 |
| 16P | 38.10 | 46.06 | 43.18 |
| 17P | 40.64 | 48.60 | 45.72 |
| 18P | 43.18 | 51.14 | 48.26 |
| 19P | 45.72 | 53.68 | 50.80 |
| 20P | 48.26 | 56.22 | 53.34 |
| 21P | 50.80 | 58.76 | 55.88 |
| 22P | 53.34 | 61.30 | 58.42 |
| 23P | 55.88 | 63.84 | 60.96 |
| 24P | 58.42 | 66.38 | 63.50 |
| 25P | 60.96 | 68.92 | 66.04 |

Unit: mm

## A2550WVFD-F-XP 2.54mm Pitch Crimp Flex Wafer

**Reference Informations:**
*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Color:White

Ordering Information:
A2550WVFD-F-XP - *** (1 / 2)
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃

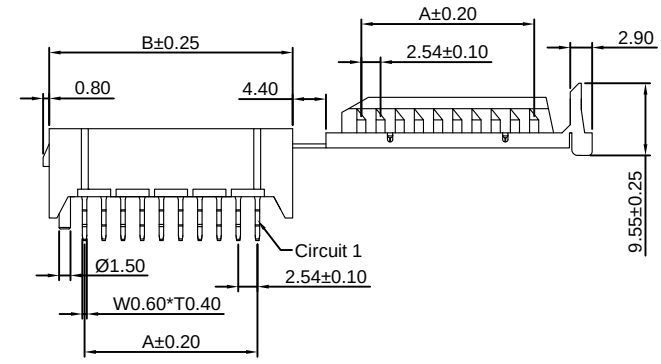


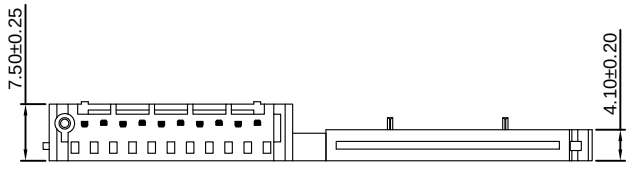





Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 1P | ---- | 9.34 |
| 2P | 2.54 | 11.88 |
| 3P | 5.08 | 14.42 |
| 4P | 7.62 | 16.96 |
| 5P | 10.16 | 19.50 |
| 6P | 12.70 | 22.04 |
| 7P | 15.24 | 24.58 |
| 8P | 17.78 | 27.12 |
| 9P | 20.32 | 29.66 |
| 10P | 22.86 | 32.20 |
| 11P | 25.40 | 34.74 |
| 12P | 27.94 | 37.28 |
| 13P | 30.48 | 39.82 |
| 14P | 33.02 | 42.36 |
| 15P | 35.56 | 44.90 |
| 16P | 38.10 | 47.44 |
| 17P | 40.64 | 49.98 |
| 18P | 43.18 | 52.52 |
| 19P | 45.72 | 55.06 |
| 20P | 48.26 | 57.60 |
| 21P | 50.80 | 60.14 |
| 22P | 53.34 | 62.68 |
| 23P | 55.88 | 65.22 |
| 24P | 58.42 | 67.76 |
| 25P | 60.96 | 70.30 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550WRFD-XP 2.54mm Pitch Crimp Flex Wafer

**Reference Informations:**
*Material:Nylon 66,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Color:White

Ordering Information:
A2550WRFD-XP (1) - *** (2)
1.Part No.
2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750℃

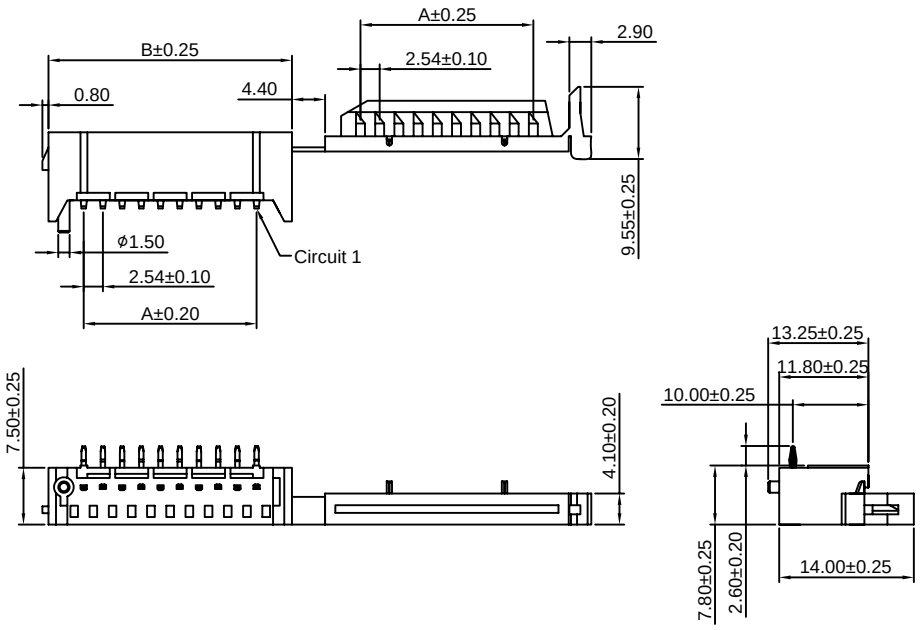


Ordering Information & Dimensions:

| PART NO. | Dimensions | |
|---|---|---|
| | A | B |
| 1P | ---- | 9.34 |
| 2P | 2.54 | 11.88 |
| 3P | 5.08 | 14.42 |
| 4P | 7.62 | 16.96 |
| 5P | 10.16 | 19.50 |
| 6P | 12.70 | 22.04 |
| 7P | 15.24 | 24.58 |
| 8P | 17.78 | 27.12 |
| 9P | 20.32 | 29.66 |
| 10P | 22.86 | 32.20 |
| 11P | 25.40 | 34.74 |
| 12P | 27.94 | 37.28 |
| 13P | 30.48 | 39.82 |
| 14P | 33.02 | 42.36 |
| 15P | 35.56 | 44.90 |
| 16P | 38.10 | 47.44 |
| 17P | 40.64 | 49.98 |
| 18P | 43.18 | 52.52 |
| 19P | 45.72 | 55.06 |
| 20P | 48.26 | 57.60 |
| 21P | 50.80 | 60.14 |
| 22P | 53.34 | 62.68 |
| 23P | 55.88 | 65.22 |
| 24P | 58.42 | 67.76 |
| 25P | 60.96 | 70.30 |

Unit: mm

## A2550WVFC-F-XP 2.54mm Pitch Crimp Flex Wafer

**Reference Informations:**
*Material:PBT,UL94V-0
*Terminal Material:Phosphor Bronze/Tin over Nickel
*Color:Blue

Ordering Information:
A2550WVFC-F-XP (1) - *** (2)
1.Part No.
2.Material:
(blank):PBT,UL94V-0
GWT:PBT,UL94V-0,GWT 750℃

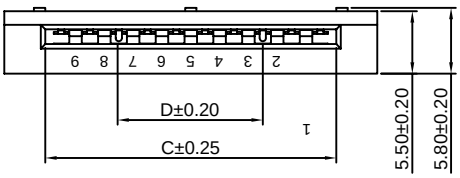


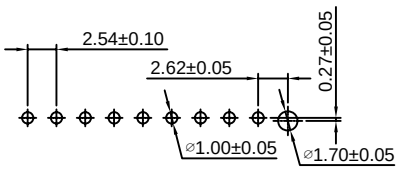


P.C.B LAYOUT

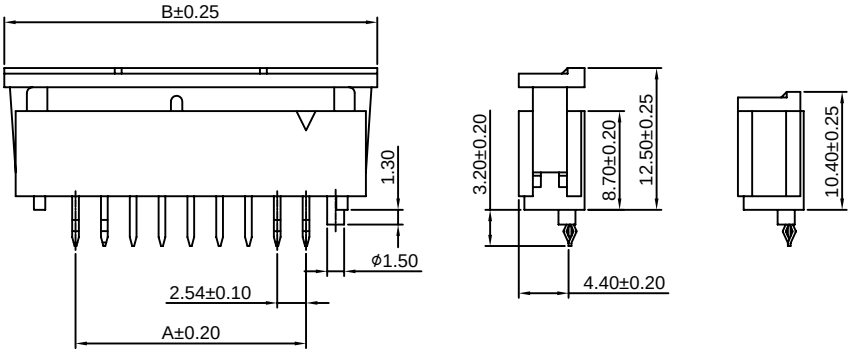


Ordering Information & Dimensions:

| PART NO. | Dimensions | | | |
|---|---|---|---|---|
| | A | B | C | D |
| 8P | 17.78 | 30.34 | 23.12 | 10.16 |
| 9P | 20.32 | 32.88 | 25.66 | 12.70 |
| 10P | 22.86 | 35.42 | 28.20 | 15.24 |
| 11P | 25.40 | 37.96 | 30.74 | 17.78 |
| 12P | 27.94 | 40.50 | 33.28 | 20.32 |
| 13P | 30.48 | 43.04 | 35.82 | 22.86 |

Unit: mm

此文档权利由CJT(长江连接器)享有,您也可访问CJT(长江连接器)官方网站获取；立创商城 WWW.SZLCSC.COM,中国领先的现货元器件交易平台。



## A2550HXXP-L-01 2.54mm Pitch FFC Cable

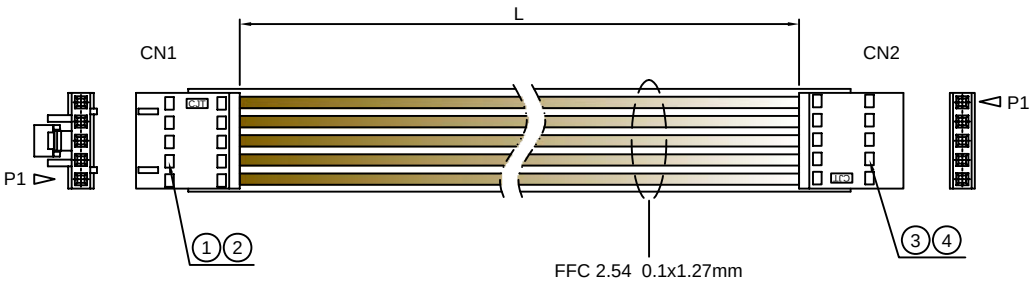


| CN1 CN2 | |
|---|---|
| ①③ Terminal | ②④ Housing |
| A2550-T<br>A2550-T-H<br>A2550-T-CR<br>A2550-T-H-CR<br>A2550-T-A<br>A2550-T-C | A2550H,HA,HB-XP<br>A2550H-XP-A,A2550H-XP-A1<br>A2550H-XP-A2,A2550H-XP-A2H<br>A2550H-XP-A3H,A2550H-XP-B<br>A2550H-XP-BH<br>A2550H-XP-C,A2550H-XP-C1<br>A2550H-XP-D,A2550H-XP-E<br>A2550H-XP-F,A2550H-XP-J<br>A2550H,HA-2xXP |
| A2550-T-E | A2550H-XP-M,A2550H-XP-M1<br>A2550H-XP-M2,A2550H-XP-M3 |
| A2550-T-J | A2550H-XP-G,A2550H-XP-G1<br>A2550H-XP-H,A2550H-XP-H1<br>A2550H-XP-I,A2550H-XP-I1 |
| A2550-T-K | A2550HK-XP,A2550HK-2xXP |
| A2550M-T | A2550H-XP,A2550H-XP-D<br>A2550H-XP-J,A2550H-2xXP |

Unit: mm

## A2550HXXPA2550MXX-L-01 2.54mm Pitch FFC Cable

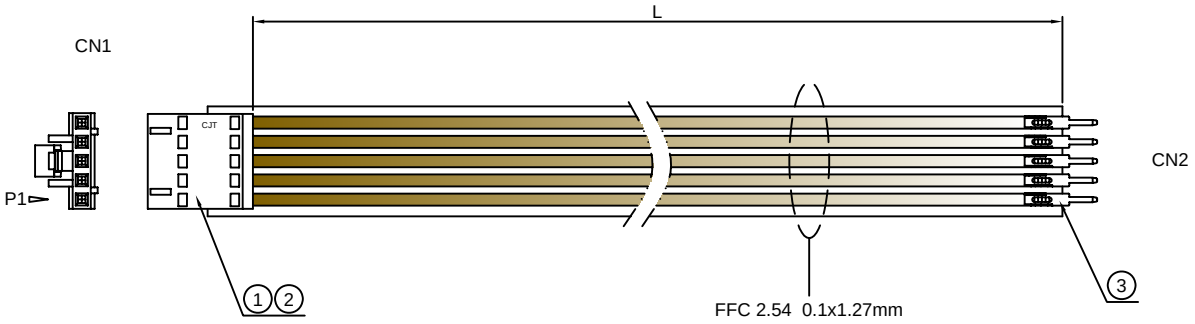


| CN1 | | CN2 |
|---|---|---|
| ①Terminal | ②Housing | ③Terminal |
| A2550-T<br>A2550-T-H<br>A2550-T-CR<br>A2550-T-H-CR<br>A2550-T-A<br>A2550-T-C | A2550H,HA,HB-XP<br>A2550H-XP-A,A2550H-XP-A1<br>A2550H-XP-A2,A2550H-XP-A2H<br>A2550H-XP-A3H,A2550H-XP-B<br>A2550H-XP-BH<br>A2550H-XP-C,A2550H-XP-C1<br>A2550H-XP-D,A2550H-XP-E<br>A2550H-XP-F,A2550H-XP-J<br>A2550H,HA-2xXP | A2550M-T-C, A2550M-T-CA<br>A2550M-T-C1, A2550M-T-C1A<br>A2550M-T-C2, A2550M-T-E<br>A2550M-T-KE, A2550M-T-F<br>A2550M-T-G, A2550MA-T-G<br>A2550M-T-J, A2550M-T-K |
| A2550-T-E | A2550H-XP-M,A2550H-XP-M1<br>A2550H-XP-M2,A2550H-XP-M3 | |
| A2550-T-J | A2550H-XP-G,A2550H-XP-G1<br>A2550H-XP-H,A2550H-XP-H1<br>A2550H-XP-I,A2550H-XP-I1 | |
| A2550-T-K | A2550HK-XP,A2550HK-2xXP | |
| A2550M-T | A2550H-XP,A2550H-XP-D<br>A2550H-XP-J,A2550H-2xXP | |

Unit: mm