




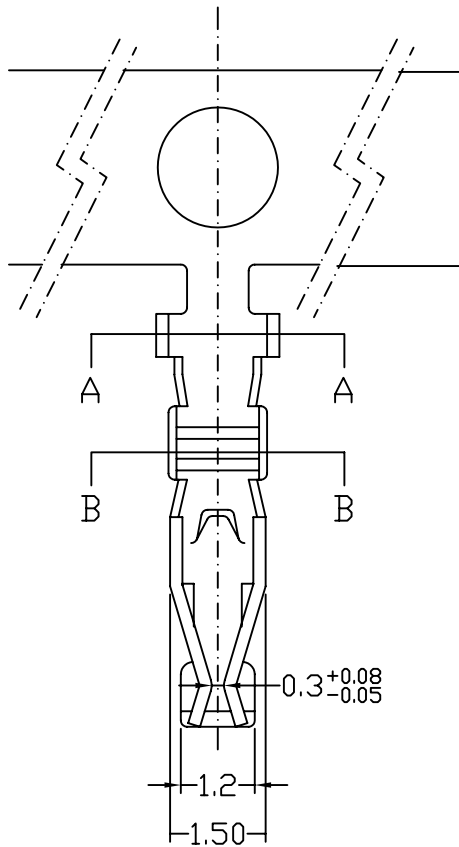


Section: A-A

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

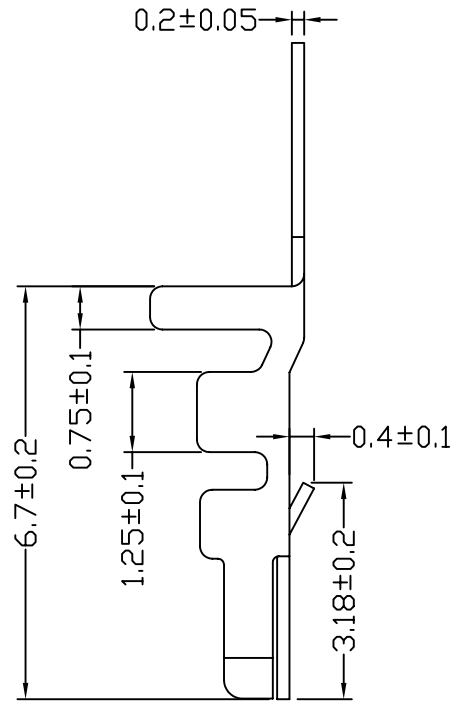

Section: B-B




Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

X2026T-PSN-A

① ② ③ ④ ⑤

- ① Series Number
- ② Category: T-terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style: SN-Bright tin plating
- ⑤ A- With Lock on both side

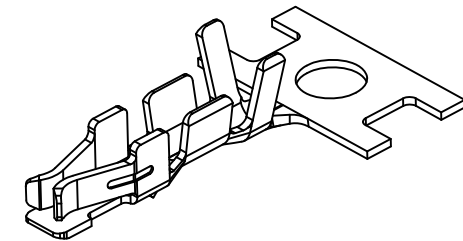

X2026T-PSN-A	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Plating: 30u" MIN. Ni; 70u" MIN. Sn	X2026H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In CJST Housing

DSND		DATE		SCALE: N/A	MODEL TYPE: X2026T-PSN-A
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	2.00mm Crimp Style Connectors
APPD		DATE		SIZE: A4	DWG NO.:
UNSPECIFIED TOLERANCES				WEIGHT 1.0g	SHEET 1/1
XKB INDUSTRIAL PRECISION CO., LIMITED				REVISION A0	

REVISIONS:
Authorized Signature(s)