
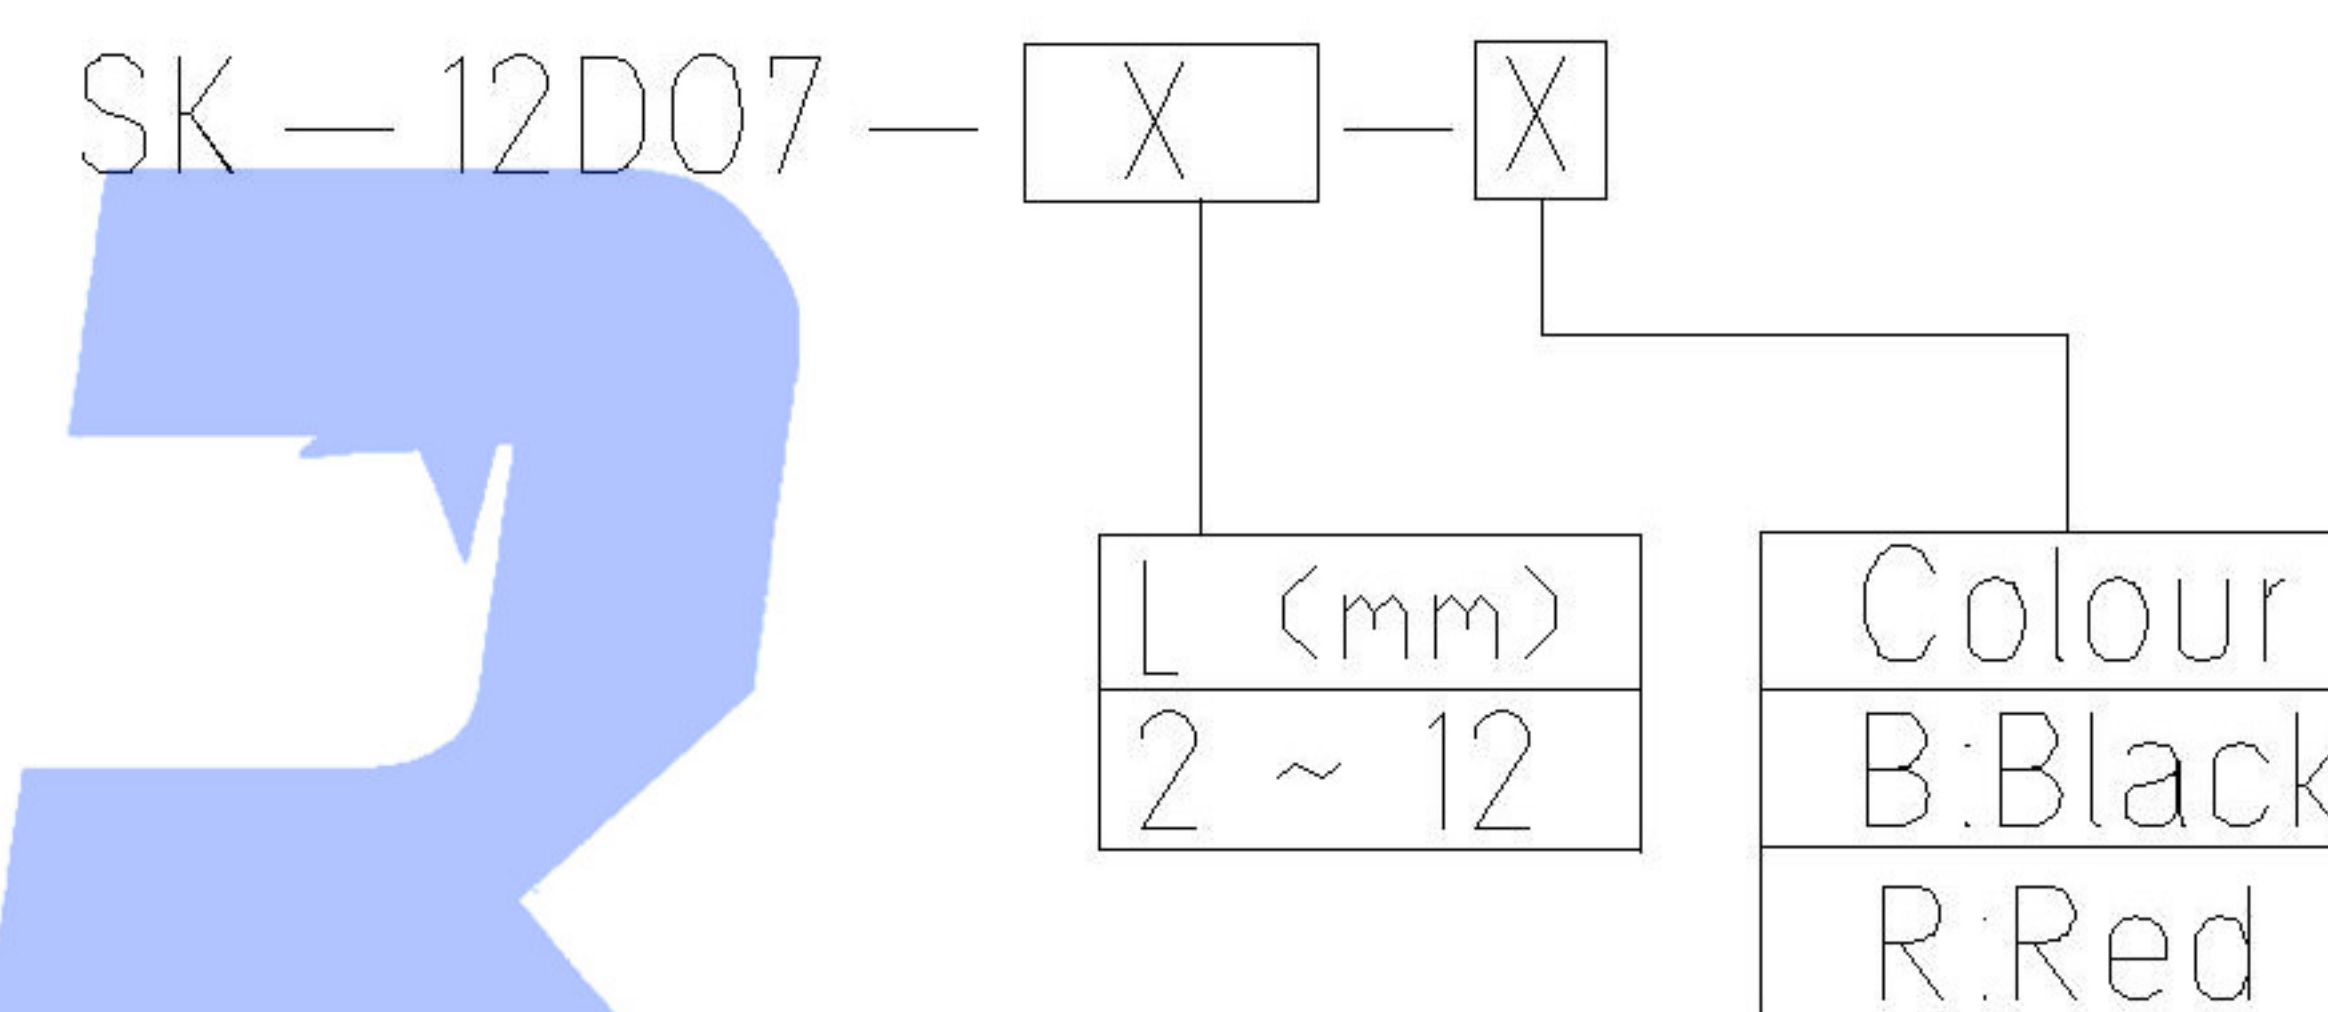
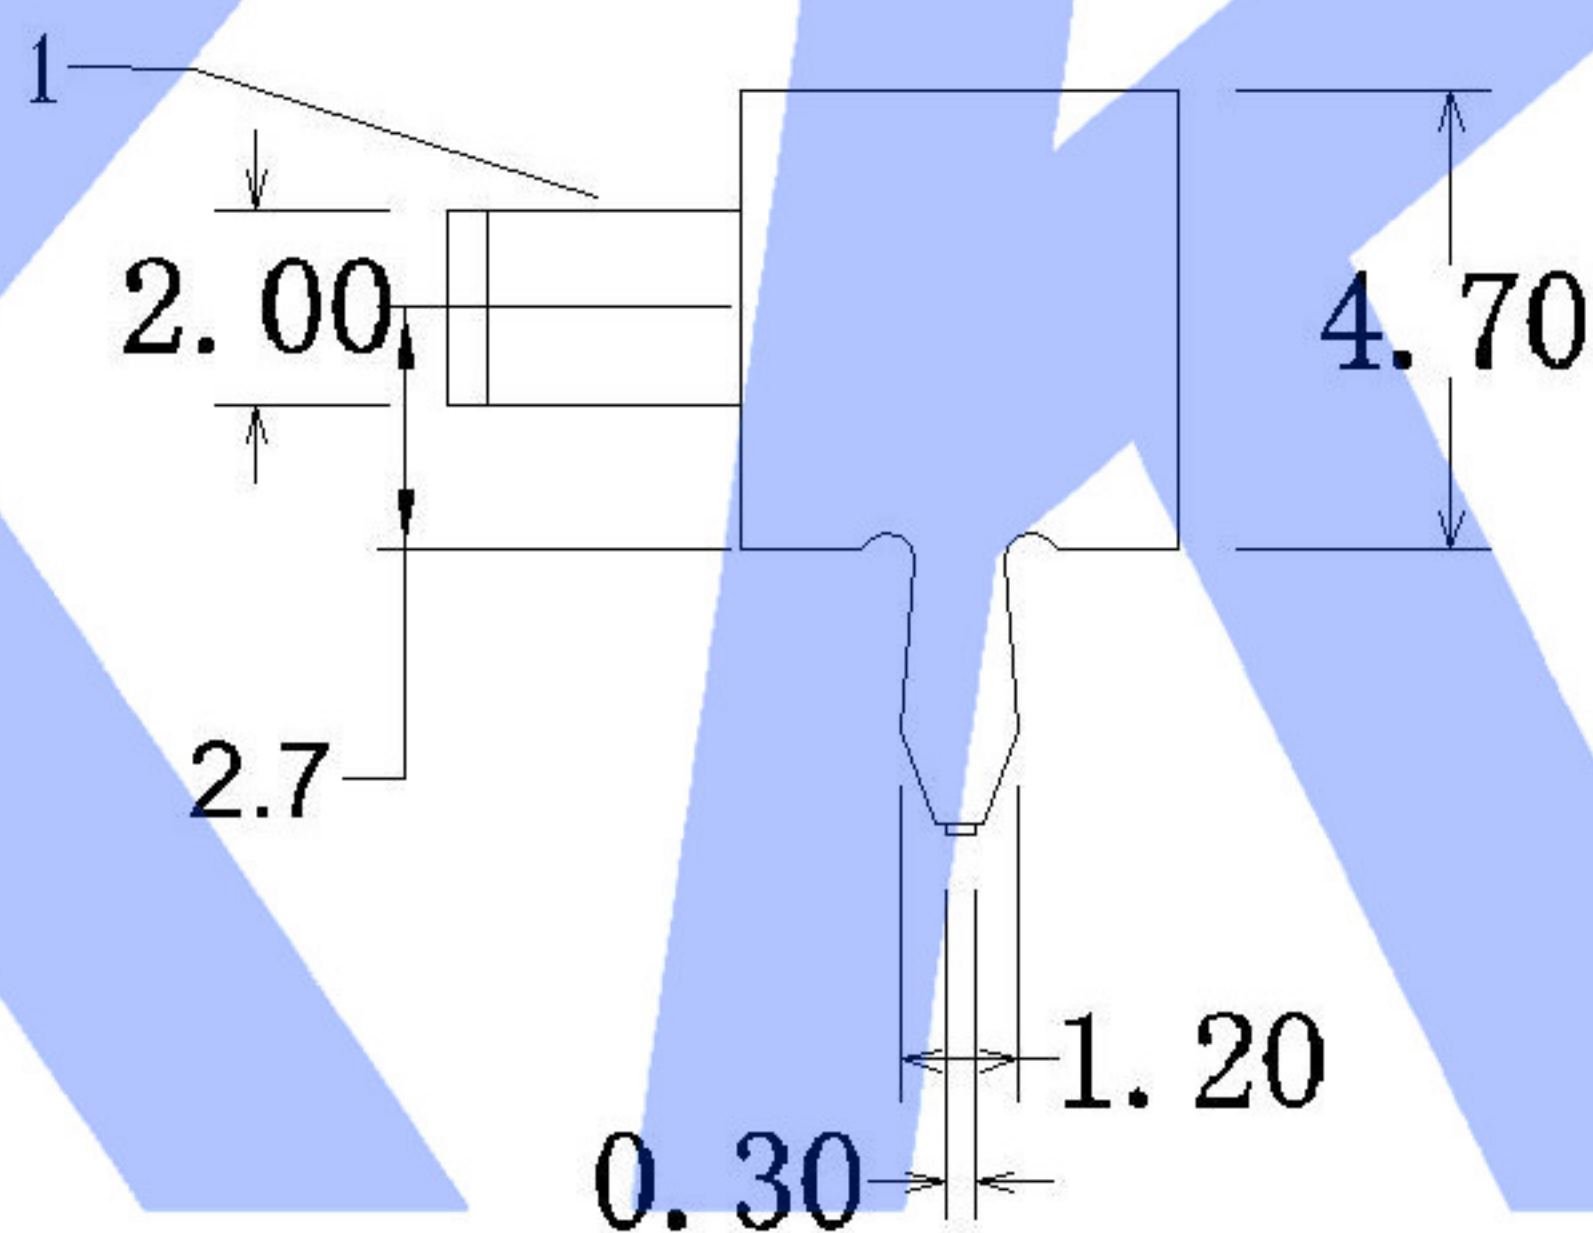
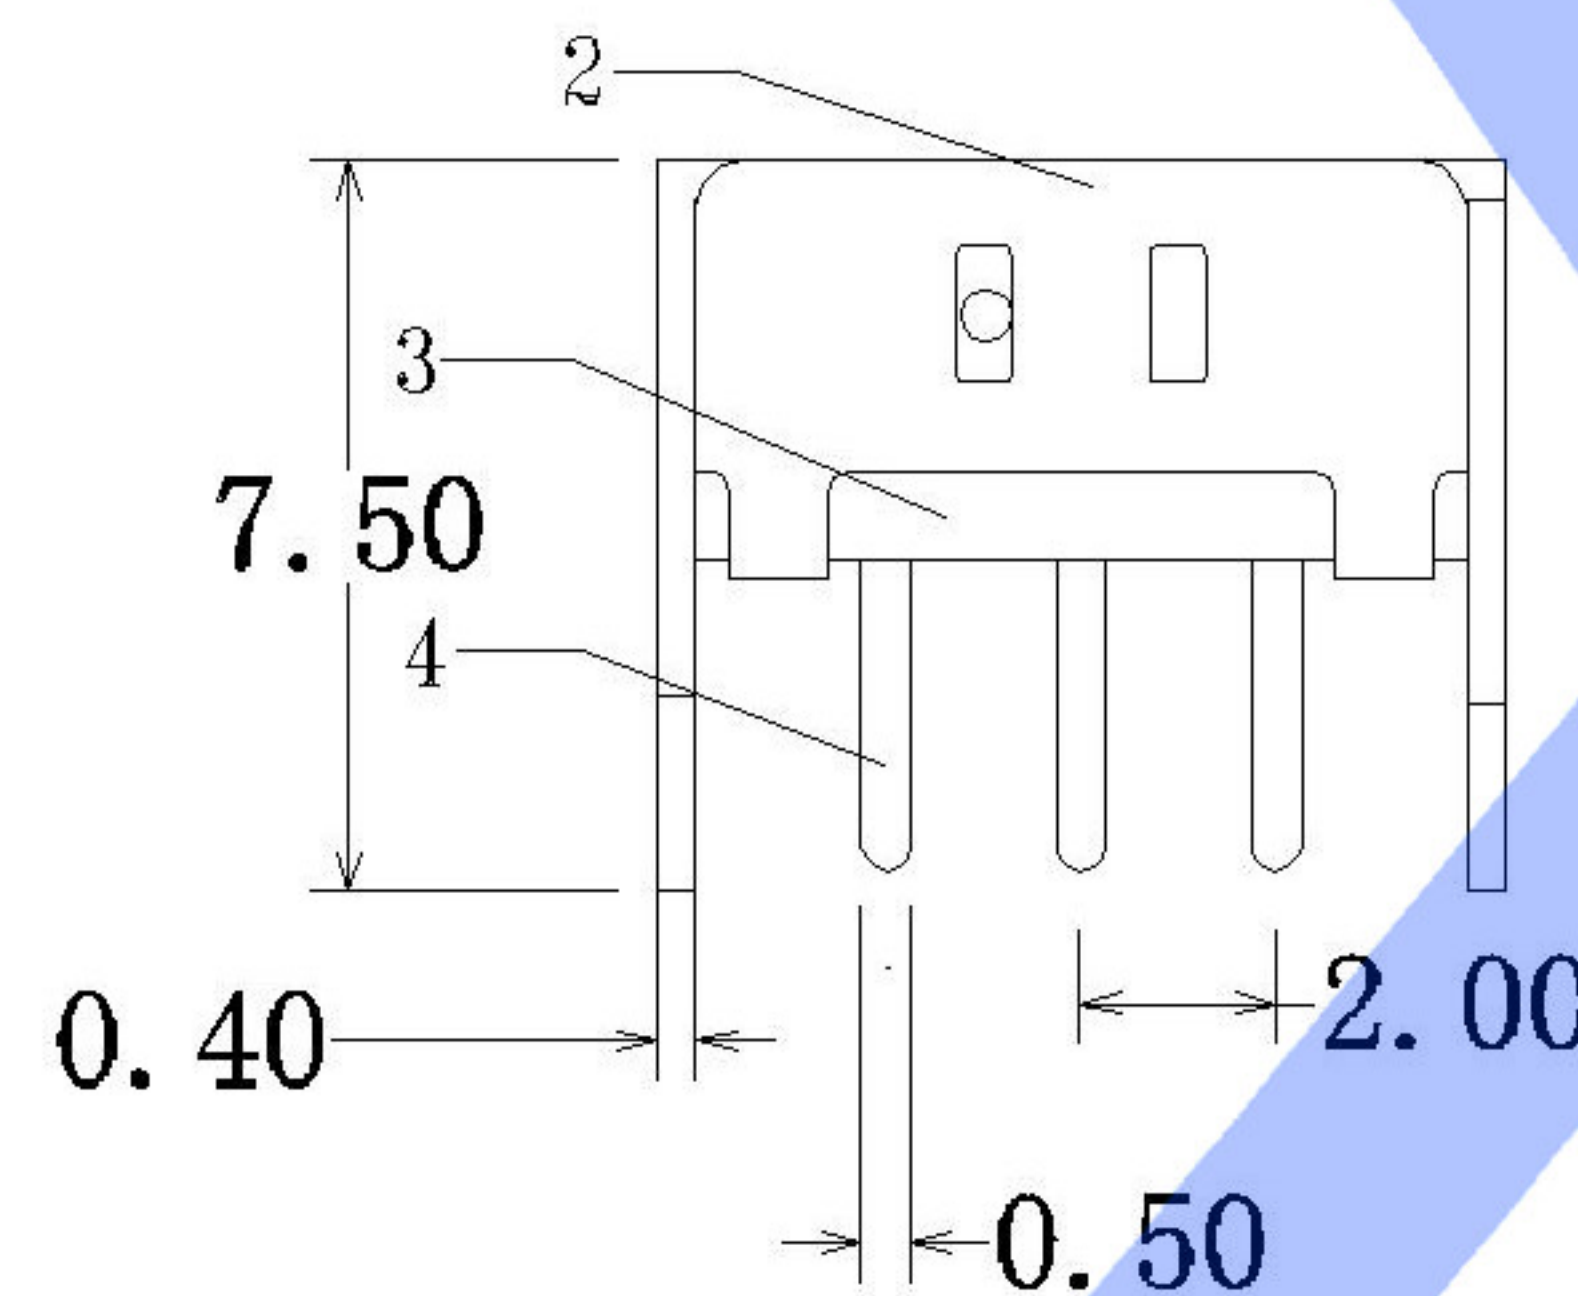
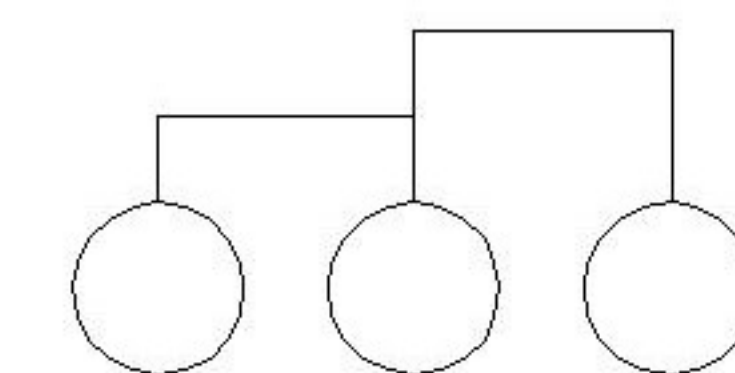
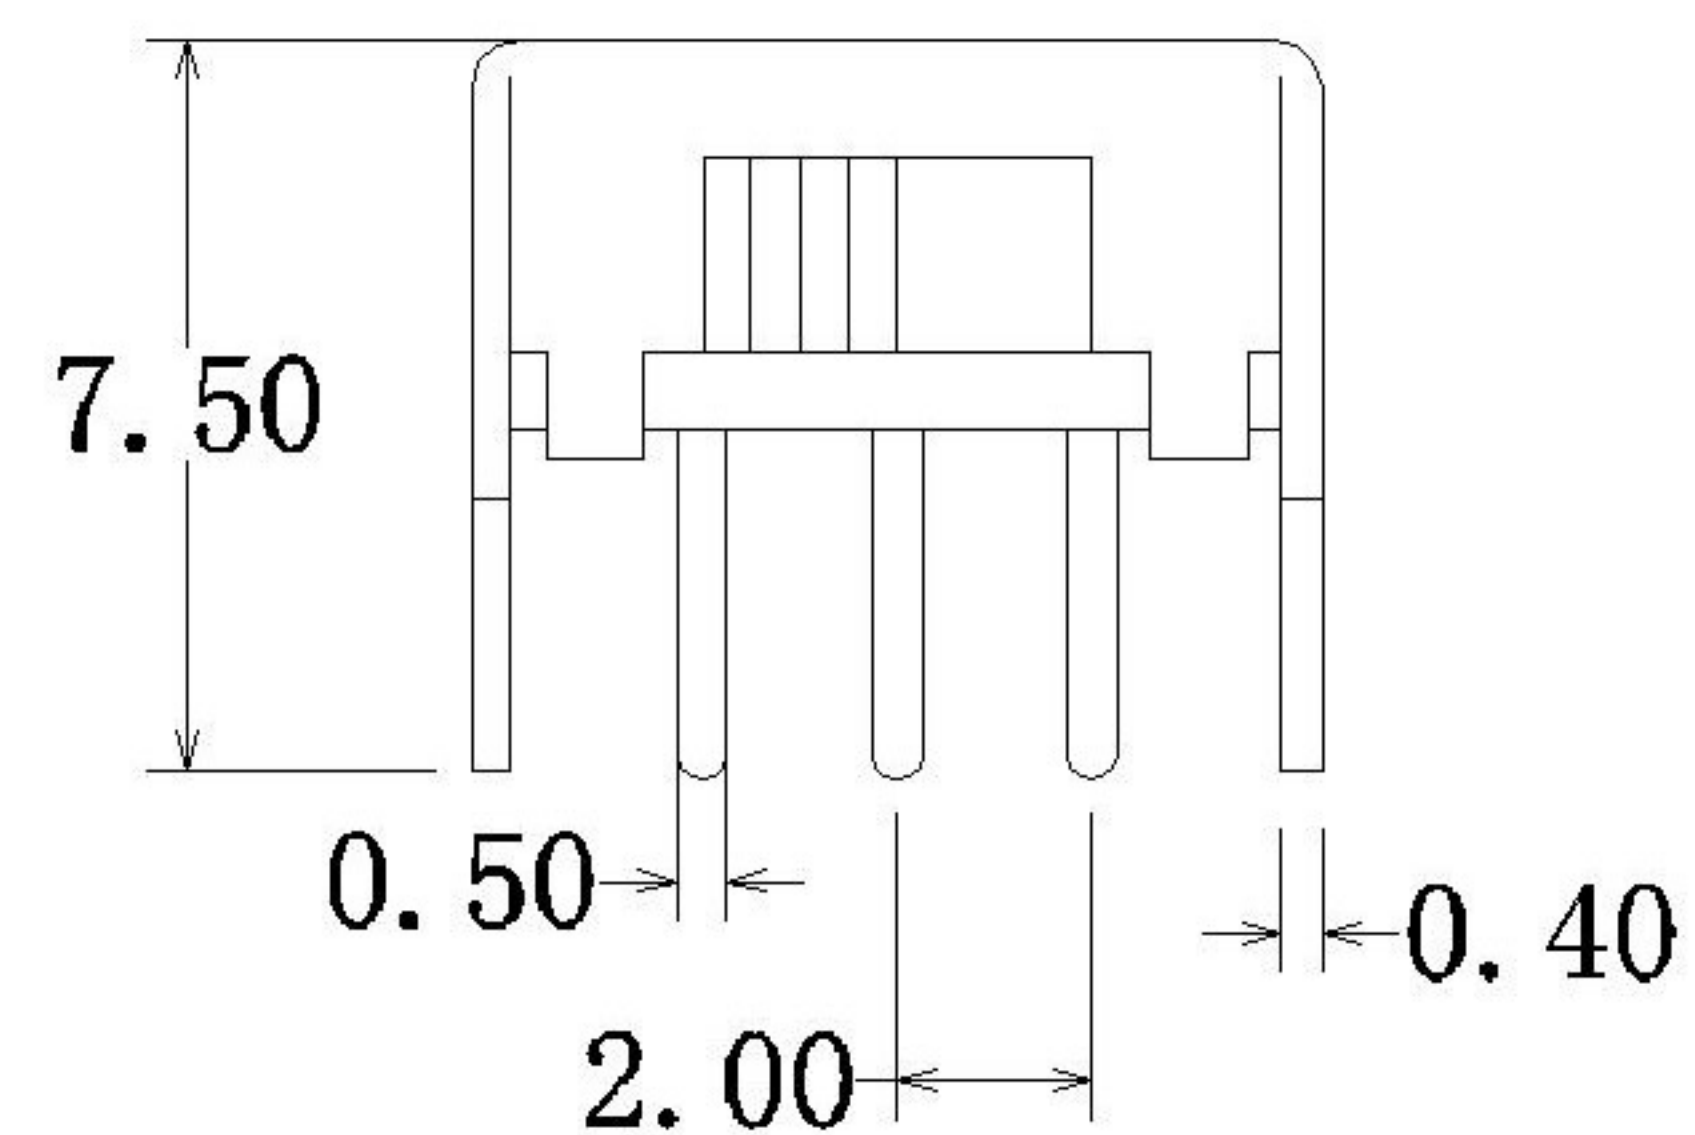


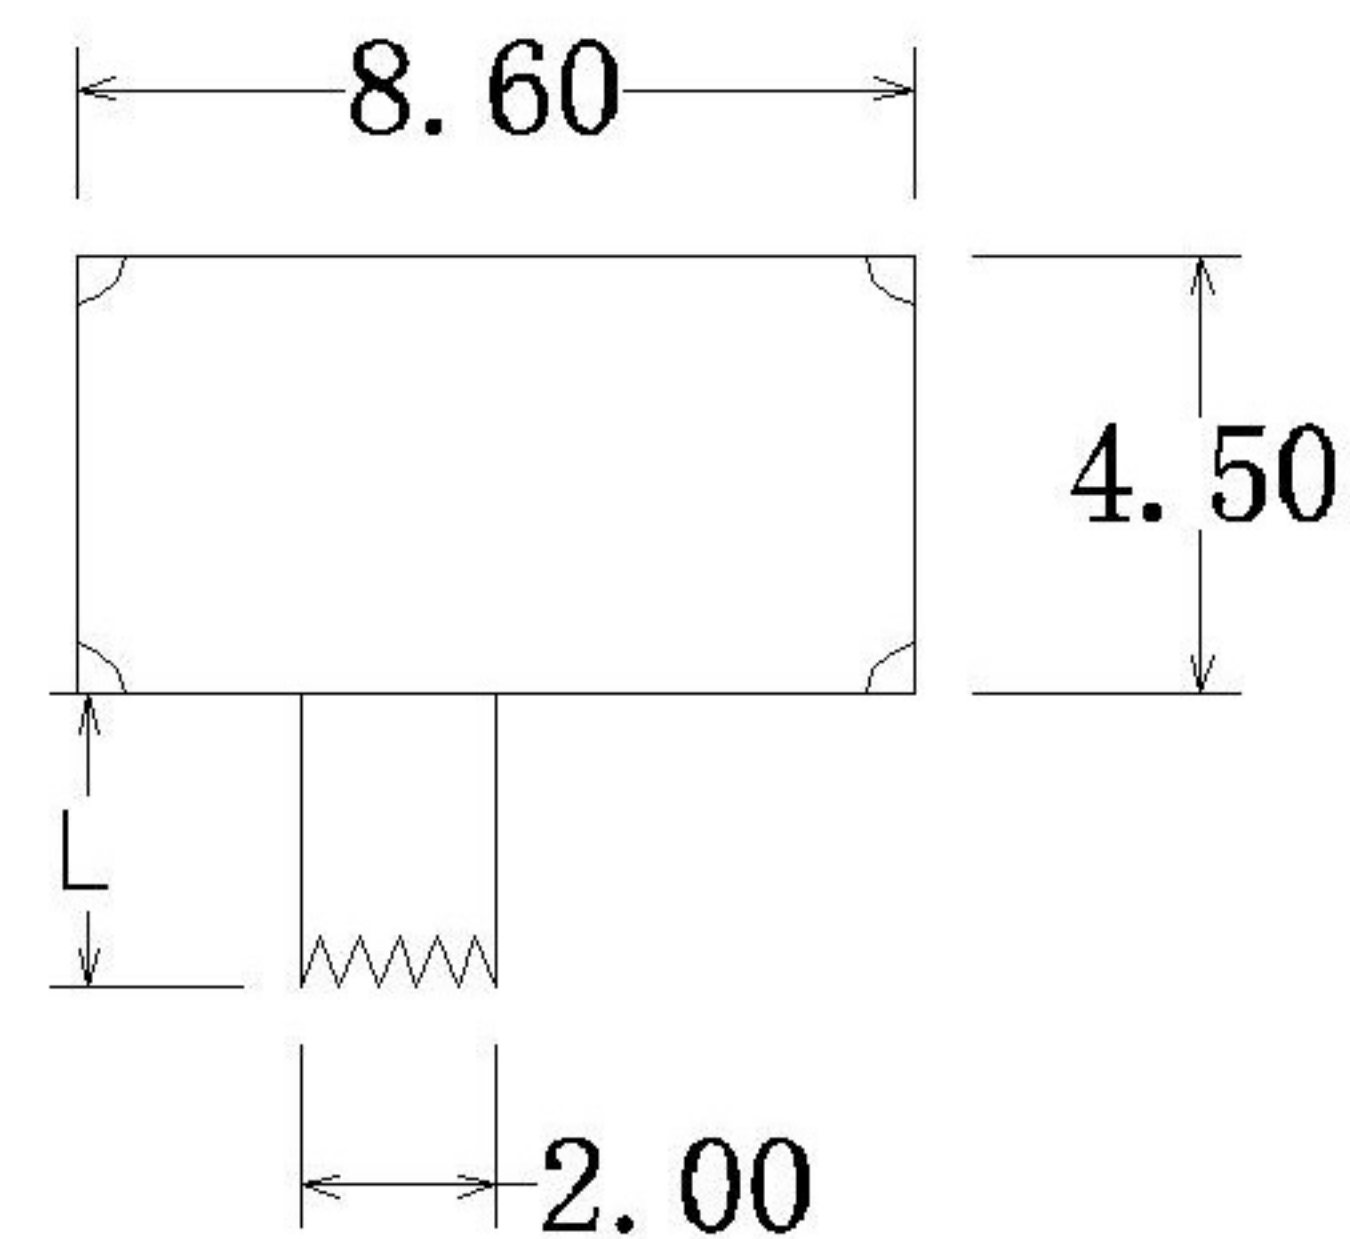

SWITCH CONNECTOR

ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
④	Terminal	—	3	Brass (0.30t)	ag Plated	
③	Base	—	1	Phenolic Resin		
②	Cover	—	1	Sus	Natural	
①	Keystake	—	1	Pa66	Black	

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100m MAX.
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△X					ANGLAR L≤4 ±5° 4<L≤16 ±0.2 16<L≤63 ±0.3 L>63 ±0.4
△X					
△X					
REVISIONS					
www.xk-dg.cn	www.1k0k.com	www.1k0k.cn			

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		DATE		VIEW:	PART NO.: SK-12D07
CHKD		DATE		UNIT: mm	DWG NO.: SK-12D07-X-X
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1
					REVISION A0