


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN161546	A版发行	08/18'16	Hunter	PM	TAN
B	ECN180313	尺寸公差调整 Δ	02/27'18	Hunter	PM	TAN

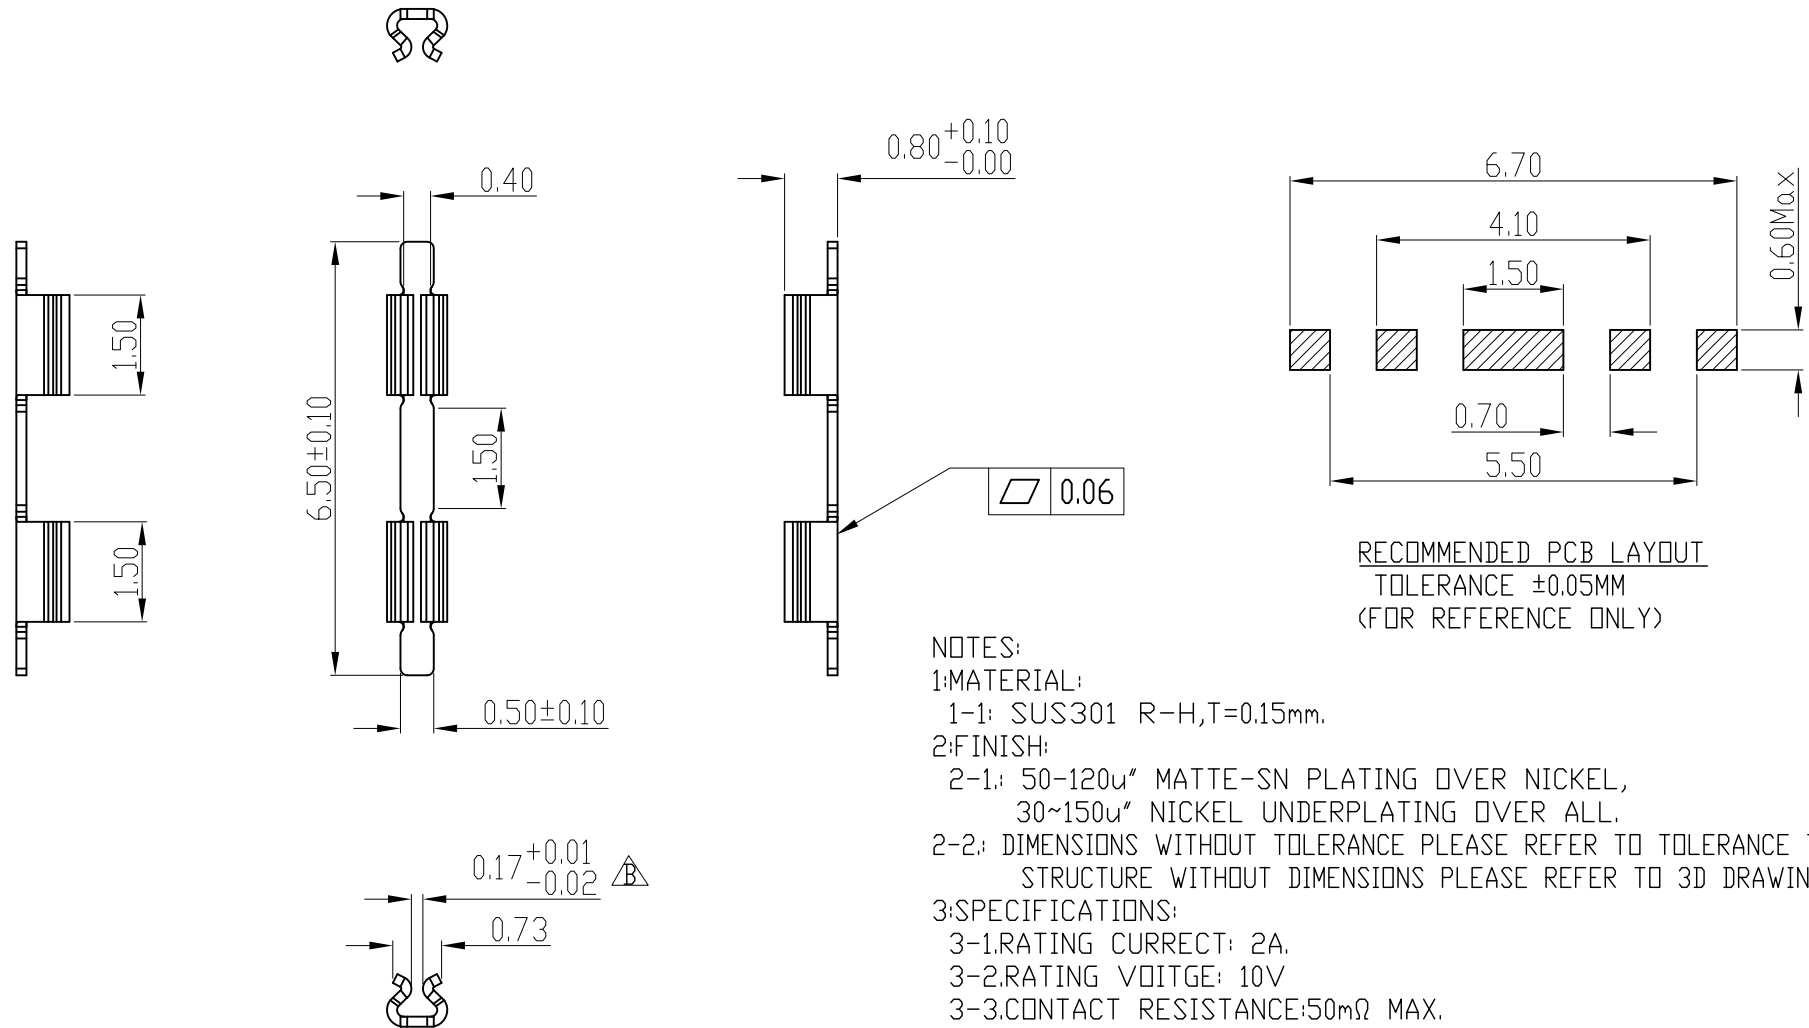

RECOMMENDED PCB LAYOUT
TOLERANCE $\pm 0.05\text{MM}$
(FOR REFERENCE ONLY)

NOTES:

1:MATERIAL:

1-1: SUS301 R-H,T=0.15mm.

2:FINISH:

2-1: 50-120 μ " MATTE-SN PLATING OVER NICKEL,
30~150 μ " NICKEL UNDERPLATING OVER ALL.

2-2: DIMENSIONS WITHOUT TOLERANCE PLEASE REFER TO TOLERANCE TABLE ,
STRUCTURE WITHOUT DIMENSIONS PLEASE REFER TO 3D DRAWING.

3:SPECIFICATIONS:

3-1.RATING CURRENT: 2A.

3-2.RATING VOLTAGE: 10V

3-3.CONTACT RESISTANCE:50m Ω MAX.

3-4.OPERATING TEMPERATURE: -40°C~+85°C.

4.PACKING SPECIFICATION:REEL&TAPE

5.COMPLIANT TO RoHS & LEAD FREE



ELECTRIC
CONNECTOR
TECHNOLOGY

GENERAL TOLERANCE

XX ± 0.40	XX, $^{\circ}\pm 3^{\circ}$
X ± 0.25	X, $^{\circ}\pm 2^{\circ}$
.X ± 0.20	.X $^{\circ}\pm 1^{\circ}$
.XX ± 0.13	

SCALE:

1:1

UNIT:

mm

SIZE:

A4



DRAWN:

hunter

CHECK:

APPROVE:

DATE:

02/27'18

DATE:

DATE:

DWG.NO:

600-4989-01

PARTS NO.(INTENDED USE):

818004989

TITLE:

CUSTOMER DRAWING
SHIELD CAN CLIP
L6.50*W0.90*H0.80mm

REV.

B

SHEET:

1/1